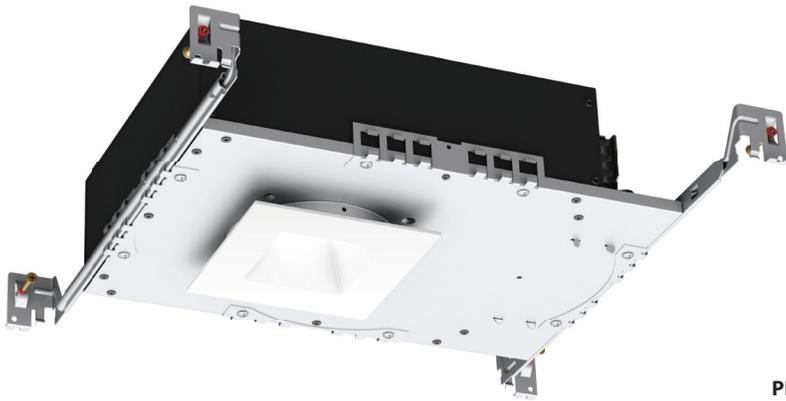


AETHER

3.5" LED Shallow Housing

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:




Project: _____

Location: _____

PRODUCT DESCRIPTION

Designed to fit in tight plenum

TRIMS (ORDER HOUSING SEPARATELY)

		HR-3LED-T120-WT <i>Round</i>
		HR-3LED-T720-WT <i>Square</i>
		HR-3LED-TL220-WT <i>Round Trimless</i>
		HR-3LED-TL820-WT <i>Square Trimless</i>

FEATURES

- Energy Star® rated
- Wet location listed for trims
- 3.5" trim aperture, 3.5" housing height
- 35° cut-off angle
- Universal input voltage (120V-277V)

SPECIFICATIONS

Construction: Powder coated finish on die-cast aluminum.

Dimming: 100% - 10% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

Input: 120V-277V AC

Light Source: Bridgelux Vero 10

Total power consumption of 22.5W with included driver


Mounting: Retention clips firmly hold trim to housing.

Finish: White (WT) powder coat paint.

Standards: ETL & cETL Listed, Airtight, Wet location.

Ceiling thickness: 1/2" - 1 1/2"

HOUSINGS

	Beam	Max CBCP	Max Lumen	Color Temp	CRI
 	HR-3LED-H20A <i>New Construction</i> <i>Non-IC, Airtight</i>				
	N 25°	4480	1375	27 2700K	85
	HR-3LED-H20AC <i>New Construction</i> <i>Non-IC, Airtight</i> <i>Chicago Plenum</i>				
	F 40°	2555	1315	927 2700K	90
				30 3000K	85
				930 3000K	90
				35 3500K	85
				40 4000K	85



Example: **HR-3LED-H20AC-F-930**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

AETHER

3.5" LED Shallow Housing

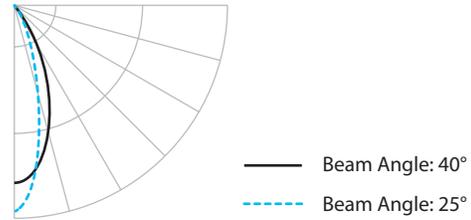
WAC LIGHTING

Responsible Lighting®

FIXTURE PERFORMANCE

Beam Angle	Color Temp	CRI	Lumens	CBCP
25°	2700K	85	1190	4405
	2700K	90	1000	3910
	3000K	85	1200	4465
	3000K	90	1005	3600
	3500K	85	1185	4260
	4000K	85	1335	4775
40°	2700K	85	1140	2360
	2700K	90	1025	2080
	3000K	85	1185	2465
	3000K	90	950	1910
	3500K	85	1175	2345
	4000K	85	1265	2520

PHOTOMETRY



waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760