







USE AND CARE GUIDE

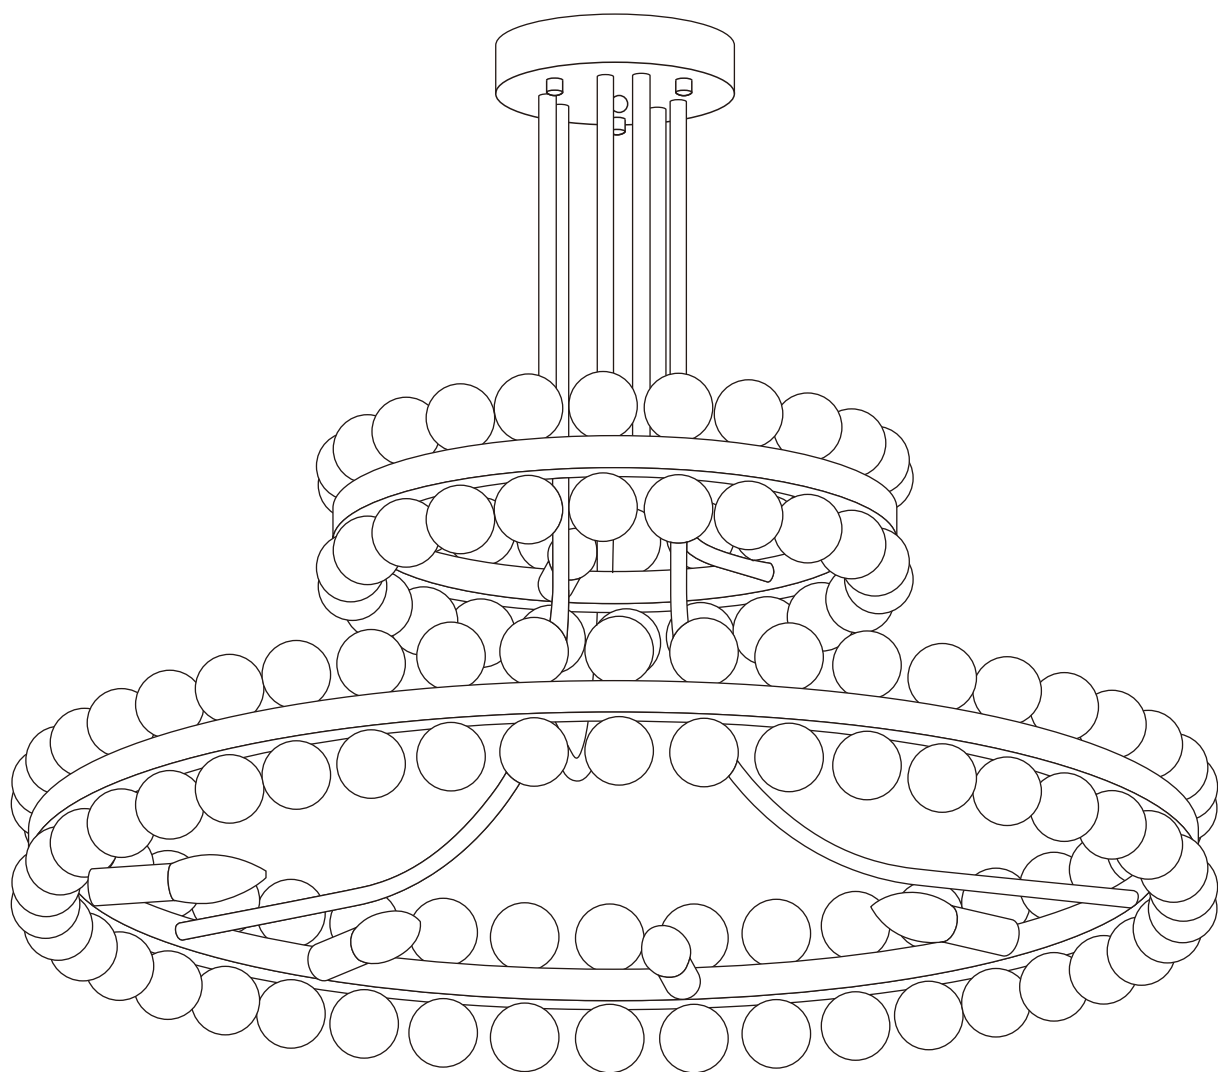


Pre-Installation

PACKAGE CONTENTS

 NOTE: Hardware not shown to actual size.

				
A Mounting Bracket 1	B Down rod 3+3	C Light body 1+1	D Crystal ball 134	E Screw Kit


Pre-Installation

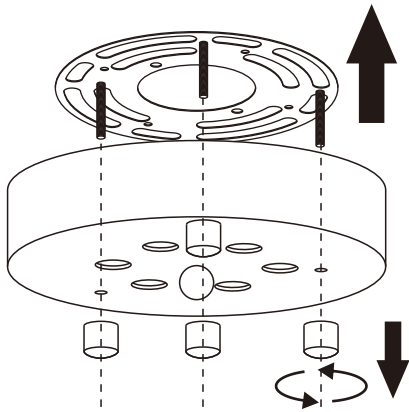

Remove the mounting bracket.

Loosen the two nuts, remove the mounting bracket, and keep the accessories.

Installation of the hanging bracket(suspension part)

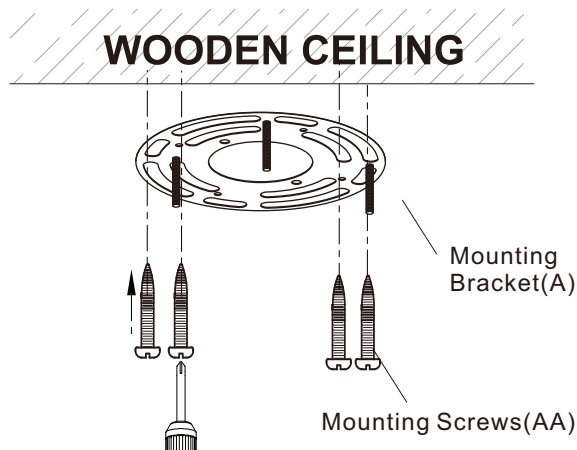


For wooden ceiling, use wood screw to drill on the wooden beam to fix the hanging bracket (selection is made according to actual requirements of the customers).

STEP 1A-WOODEN CEILING

SWITCH OFF THE ELECTRICAL MAINS AT THE CIRCUIT BREAKER FUSE BOX.

- 1) Use the Mounting Bracket (A) as a guide, mark the spots where the 4 Self Mounting Screws (AA) will be drilled.
- 2) Remove the Mounting Bracket (A), drill 4 holes for 3MM diameter, install the mounting bracket onto wooden ceiling with the 4 Self Mounting Screws (AA).

⚠ **IMPORTANT :SCREWS MUST BE TIGHTENED TILL SNUG**

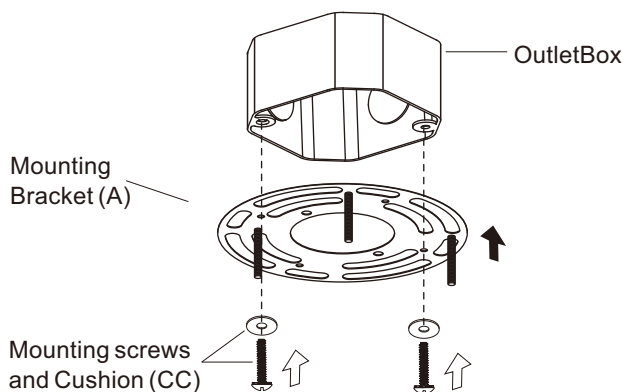

For outlet box, Tighten the hanger bracket to the outlet box with 2 mounting screws. (To reduce the risk of fire, electric shock, or personal injury, mount to the outlet box marked "Acceptable for fan support" and use mounting screws provided with the outlet box.)

STEP 3A-OUTLET BOX

SWITCH OFF THE ELECTRICAL MAINS AT THE CIRCUIT BREAKER FUSE BOX.


- 1) Use Mounting screws (CC) and Cushion to secure the Mounting Bracket (A) to the Outlet Box.

⚠ **IMPORTANT :SCREWS MUST BE TIGHTENED TILL SNUG**

Assembly-Assemble the light body


1. Assemble the light body.

- ❑ Remove the nut from the down rod, and thread the wiring from the small light body through the down rod, canopy, and nut.
- ❑ Insert the three down rod into three separate holes with spacing. as shown in the diagram. Remove the nuts, then insert the top of the down rods into the canopy.
- ❑ Use the included hex key to secure the light body and the down rod, and tighten the nut at the top to fix the down rod and the canopy.
- ❑ Install the large light body using the same method.

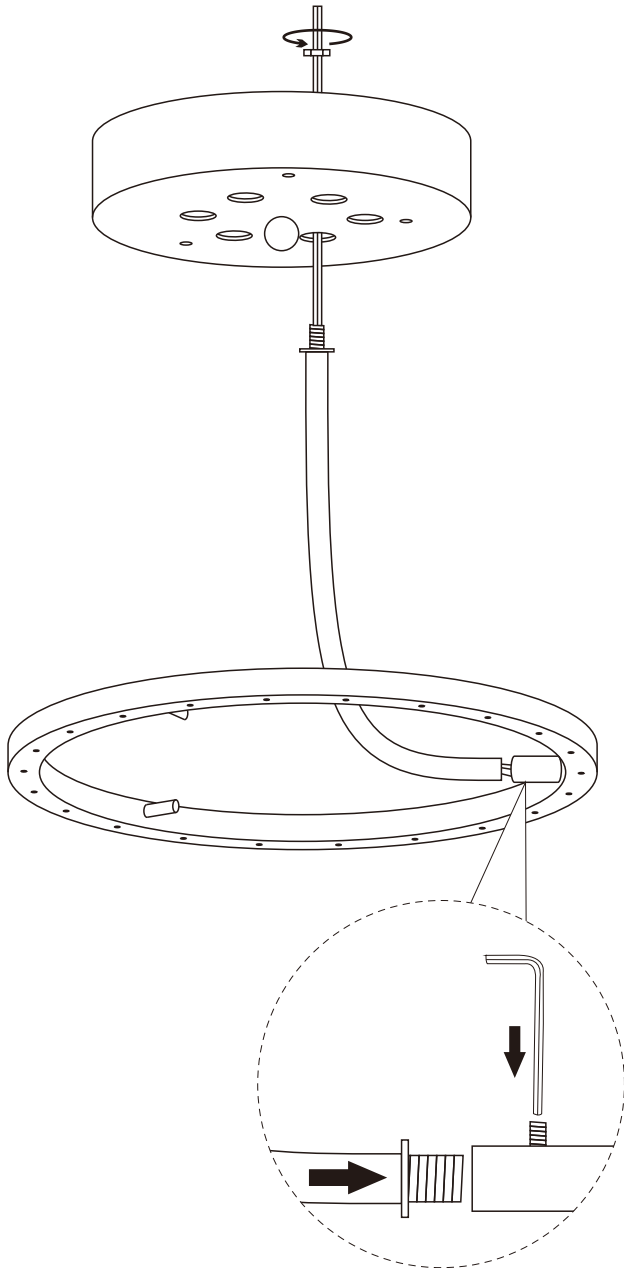

2. Install "J" hook

- ❑ Drill a hole with a diameter of 8mm in the ceiling, install the "J" hook.

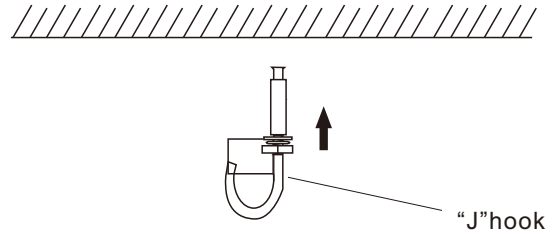

3. Wire connection




WARNING: To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. If you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.



WARNING: Each wire nut supplied with this fan is designed to accept up to one 12-gauge house wire and two wires from the fan. If you have larger than 12-gauge house wiring, or more than one house wire to connect to the fan wiring, consult an electrician for the proper size wire nuts to use.


- ❑ Hang the steel wire rope onto the hook.
- ❑ Use a wire nut to connect the ground wire from the Canopy to the ground wire in your home.
- ❑ Use a wire nut to connect one of the wires from the two light bodies to the neutral wire.
- ❑ Use a wire nut to connect the other wire from the two light bodies to the live wire.
- ❑ Secure each wire connecting nut using electrical tape.

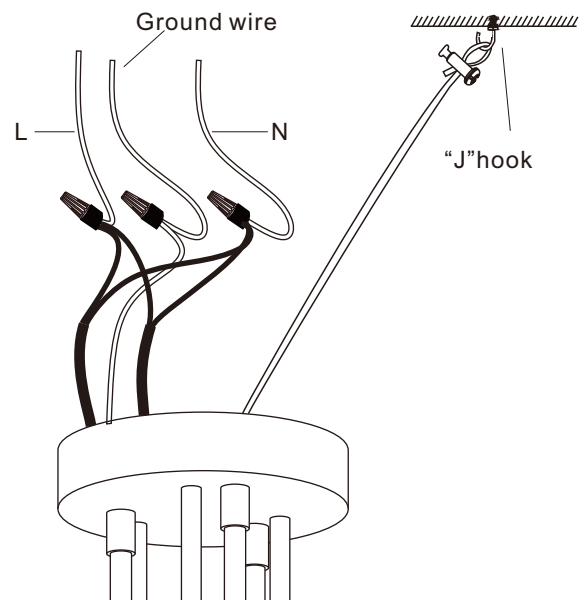

Assembly-Assemble the light body


4. Hang the light fixture.

- Use the nuts removed earlier to secure the light fixture to the mounting bracket, completing the installation.

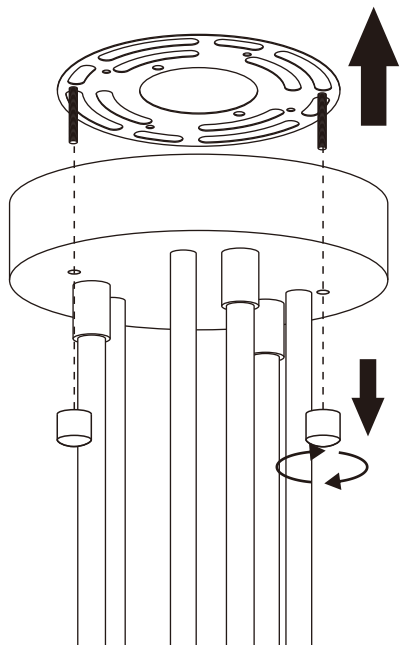

5. Assemble the light body.

- Rotate and install each crystal ball onto the top and bottom of the light body.

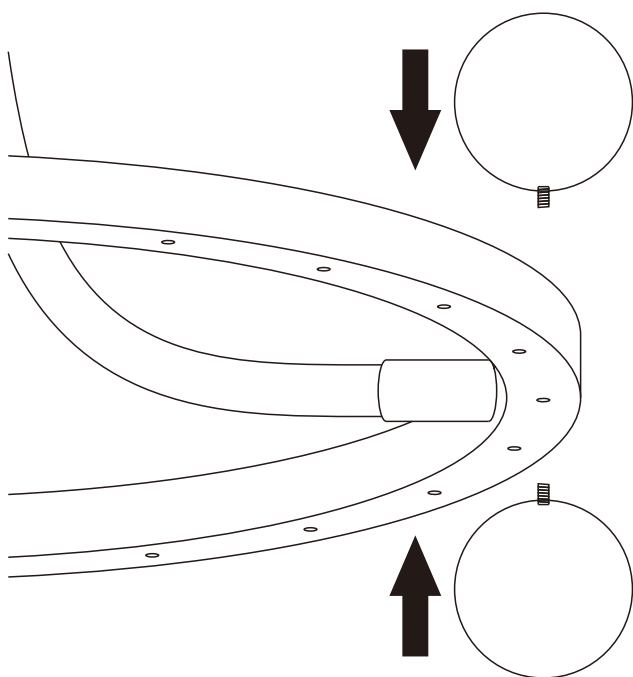

6. Install the light bulbs.

- The customer should prepare 12 E12 bulbs and install them one by one onto the light fixture.

