


LDC880 LDC880A

USER MANUAL LED RECESSED DOWNLIGHT



- 01 MARK HOLE PATTERN
- 02 SWITCH-OFF MAIN
- 03 PUT THE LAMP EACH BY EACH INTO THE CEILING AND CONNECT EACH OTHER AS DRAWING SHOWS
- 04 CONNECT POWER-SUPPLY TO THE MAIN
- 05 CONNECT THE LAMP TO POWER SUPPLY
- 06 SWITCH-ON THE MAIN AND LIGHT ON

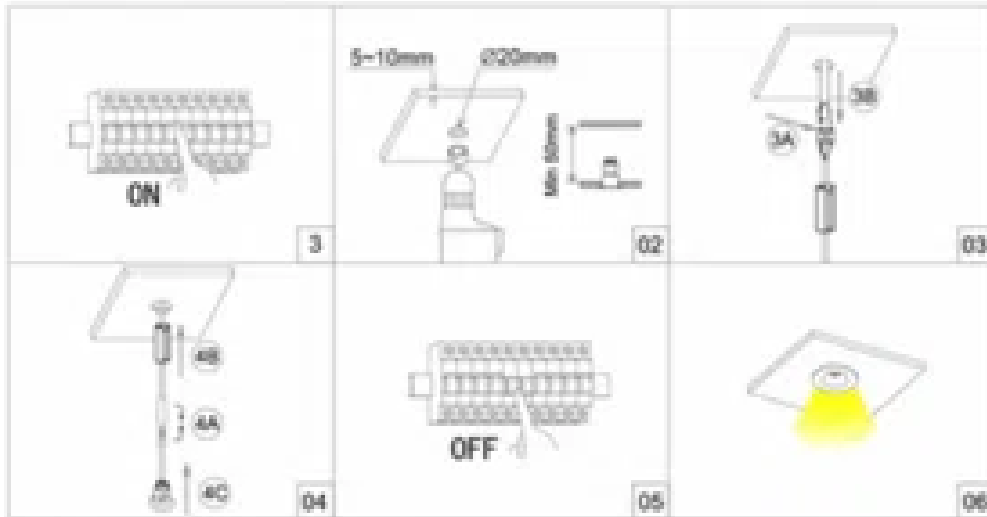

Lamp: CREE XPE LED
 Color: 2700K/3000K/4000K/5000K
 Color rendering: Ra80
 Input: 100V-240V AC
 Current: Constant 300mA
 Frequency: 50/60Hz
 Watt: 1W
 Life span: 20,000hrs
 Operating temp: -20°C-+40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee