


# OUTDOOR WALL LANTERN USE AND CARE GUIDE




# INSTALLATION INSTRUCTIONS FOR OUTDOOR WALL LIGHT

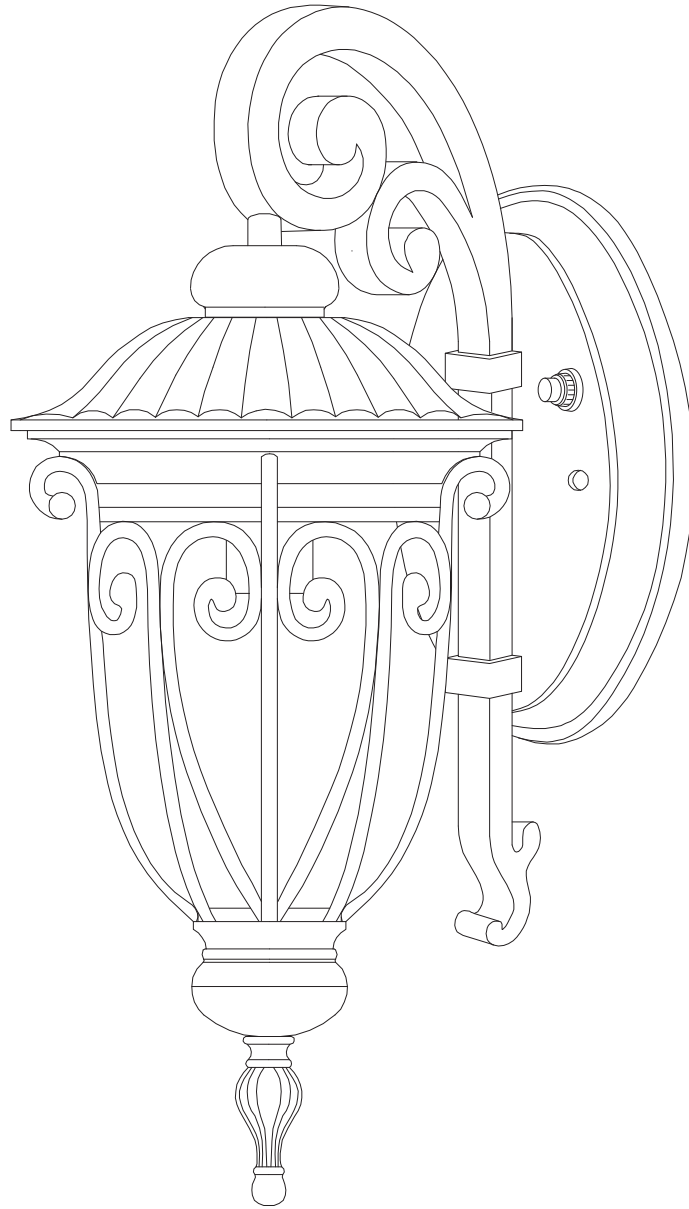

INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS  
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY  
INSTRUCTIONS**  
SAVE THESE INSTRUCTIONS

**Before starting the installation, disconnect the Power by Turning Off the Circuit Breaker. Turning the Power Off using the is not sufficient to prevent electrical shock. All electrical connections and installation must be following local codes, ordinances, and/or National Electric Code and Must Be Done by an Electrician Only.**

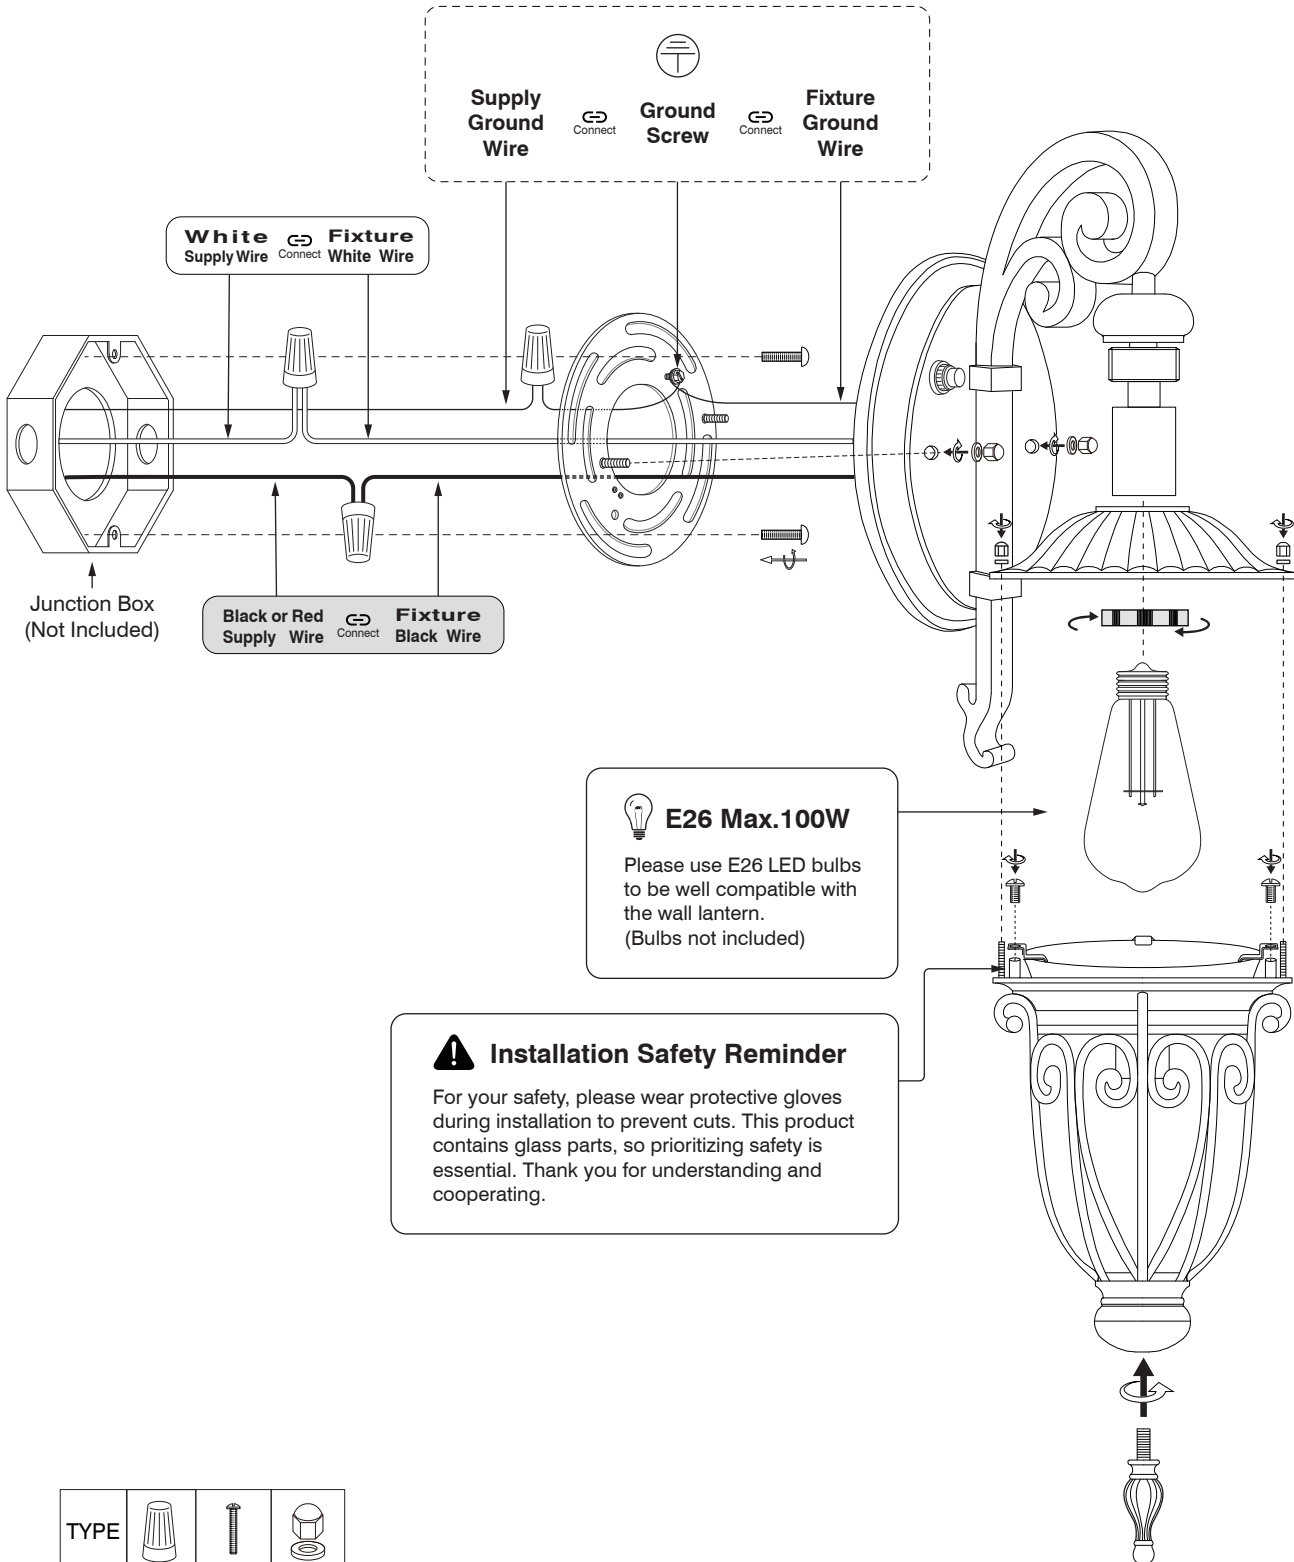

**E26 Max. 100W**  
Please use E26 LED bulbs to be well compatible with the wall lantern.  
(Bulbs not included)

**⚠ Installation Safety Reminder**  
For your safety, please wear protective gloves during installation to prevent cuts. This product contains glass parts, so prioritizing safety is essential. Thank you for understanding and cooperating.

TYPE			
QTY	3pcs	2pcs	4pcs

# ASSEMBLY INSTRUCTIONS

## TOOLS AND MATERIALS REQUIRED:



Phillips  
Screwdriver




Wire Cutters



Safety Gloves



Ladder



Mastic Silicone  
Rubber




Safety Glasses

## SAFETY PRECAUTIONS:


1. Turn off electrical power before starting the installation of the light fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. Firmly attach the fixture ground wire (bare copper) to the mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut.
4. To clean the fixture, turn off the power, wait for it to cool, and wipe the fixture with a clean, soft cloth.

Note: the product may not look exactly as shown in the figures.


## INSTALLATION:




**1.** Secure the round mounting bracket to the outlet box. Make sure the studs on the mounting bracket are facing out from the junction box.

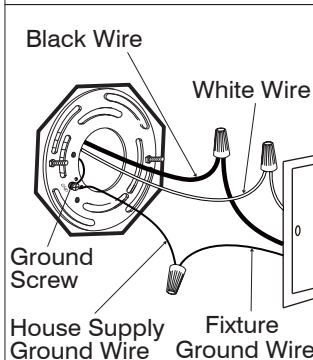


**2.** Firmly attach the fixture ground wire (bare copper) to the round mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut. Connect the black wire from the fixture to the black wire in the junction box with a wire nut. Connect the white wire from the fixture to the white wire in the junction box with a wire nut.




**3.** Once connections of wires are completed, carefully tuck wires and wire nuts into the junction box making sure no bare wire (on the black and white) is visible at the wire nuts.



**4.** Secure the two studs on the round mounting bracket to the lamp mounting plate with cap nuts.




**5.** Install the proper bulb type and wattage (not included). Note: Please use dimmable led bulbs or incandescent bulbs to be compatible with wall lights and avoid flicker problems. Very few models of dimming bulbs may have compatibility issues. If flickering occurs, please consider replacing dimming bulbs of other brands.



**6.** After Installation, seal around the top and side perimeter between the fixture and the wall surface with weather-resistant caulking. The bottom should be left un-caulked to prevent moisture build-up. Apply a small amount of weather-resistant caulking around the side perimeter between the cap nut and the mounting plate.

# Dusk to Dawn Sensor

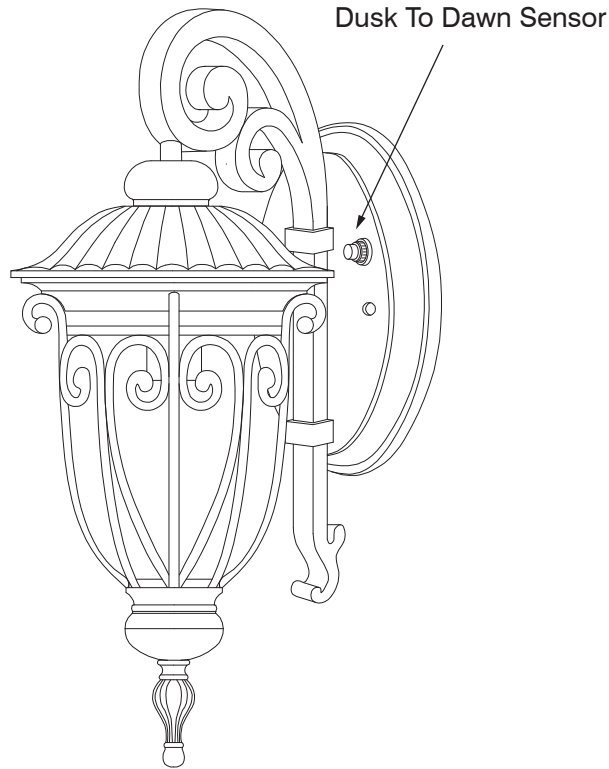

## PRODUCT DETAILS

### Dusk To Dawn Sensor

The sensor can turn on and off the lamp according to the ambient light. When the light is dark, such as at night (5-60Lux Outdoor natural light), the lamp will automatically turn on, and when the surrounding environment is bright, such as after dawn, the lamp will automatically turn off.

So you don't have to manually turn on or off the lights, you can keep the switch always on, and automatically turn on and off every day, saving your electricity bills.

If you want to disable this feature, cover the sensor with dark tape.

Glass Type:	Seed Glass
Housing Material:	Aluminum
Power Source	Hard-wired
Voltage:	120VAC 60Hz
Maximum Wattage:	100W
Bulb Base:	E26
Water Resistance :	Wet Location

## 1 YEAR LIMITED WARRANTY\*

This is warranted against defects in material and quality for 1 year from the purchase date. This warranty does not cover acts of nature such as lightning damage or corrosion and discoloration of components. Nor does it cover damages caused through abuse, improper installation, surges in electric current, or acts of third parties.

This warranty does not cover the costs of removing and resealing the lighting fixture.

If this product falls for any reason covered by this warranty, feel free to contact us.