



Tools Required

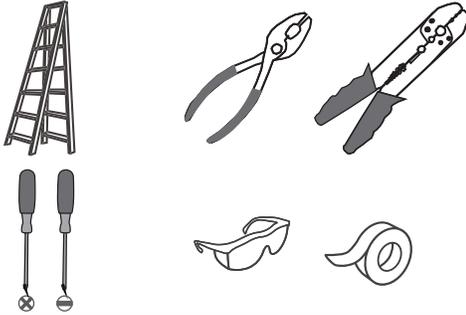

Light Source

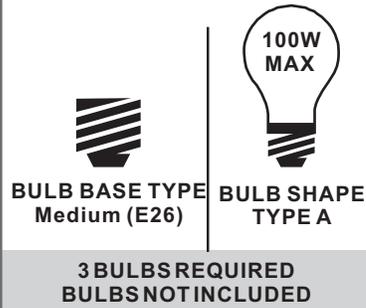

Fixture Height Adjustable 21.5" to 57.5"

⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG




A Crossbar Assembly
x 1

B Outlet Box Screw
x 2


C Wire Connector
x 3

D Quick Link
x 1




E Ceiling Canopy
x 1

F Small Loop
x 1



G 6" L Rod
x 2

H 12" L Rod
x 2

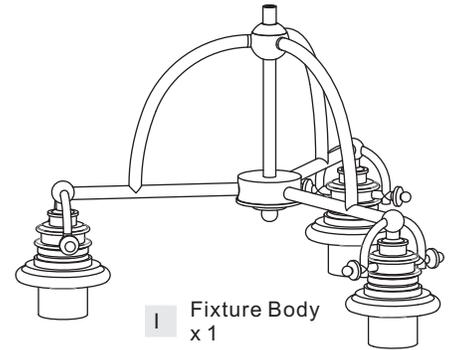

I Fixture Body
x 1


J Ring
x 3



K Shade
x 3


Table of Contents

Rods & Small Loop



STEP 1

Crossbar Assembly




STEP 2

Quick Link




STEP 3

Wiring



STEP 4

Ceiling Canopy



STEP 5

Ring & Shade



STEP 6

Bulb



STEP 7




STEP 1

Optional Rods

8' ceiling:
(1) 12"L rods

9' ceiling:
(2) 12"L rods


10' ceiling:
(2) 6"L + (2) 12"L rods

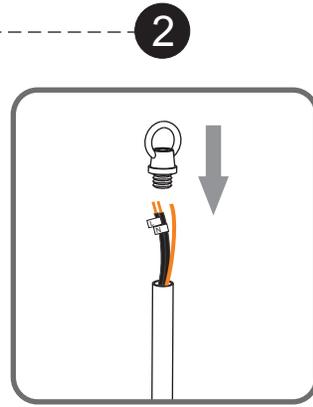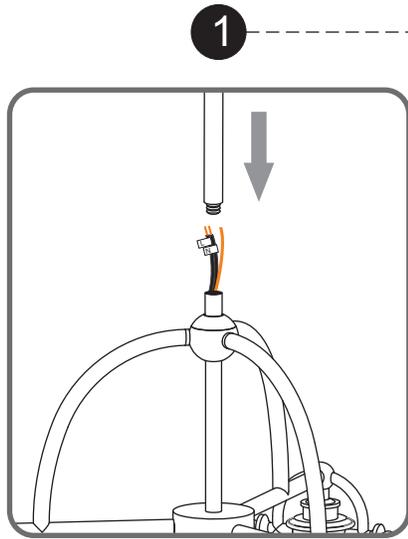

STEP 2


1

Step 1
Install crossbar assembly

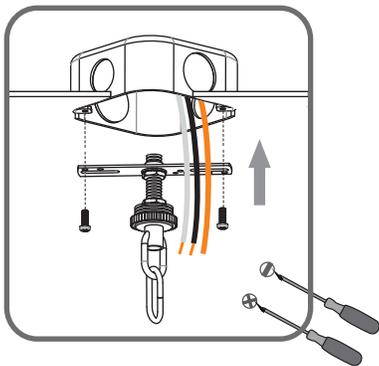


2


Step 2 - 3
Test fitting ceiling canopy to nipple



3

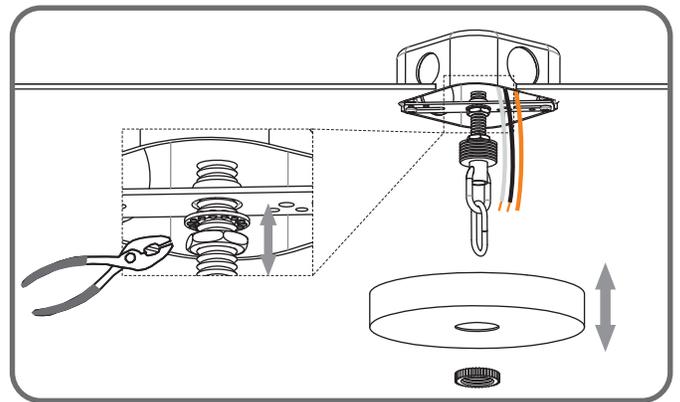


STEP 3

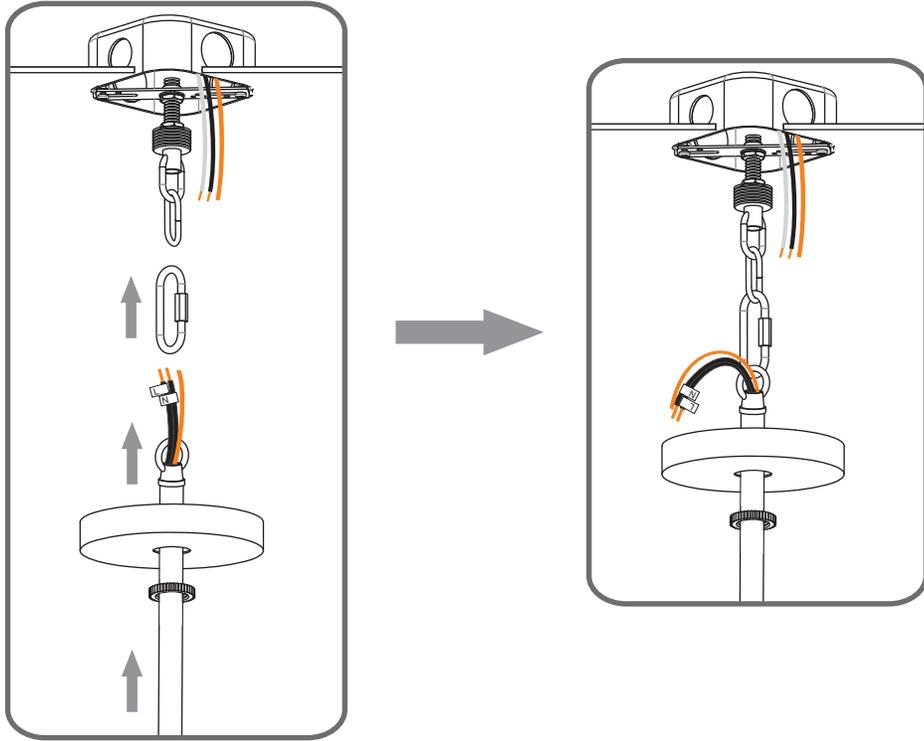


STEP 4

1


Step 1
Feed the fixture wires
through the loop

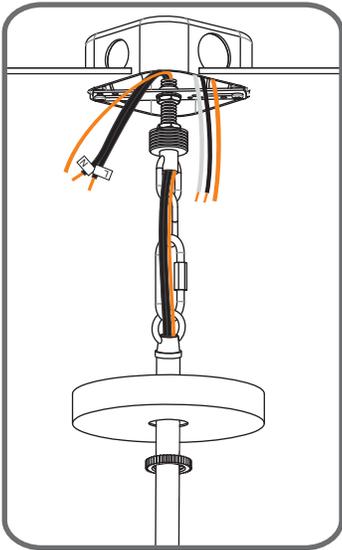

2

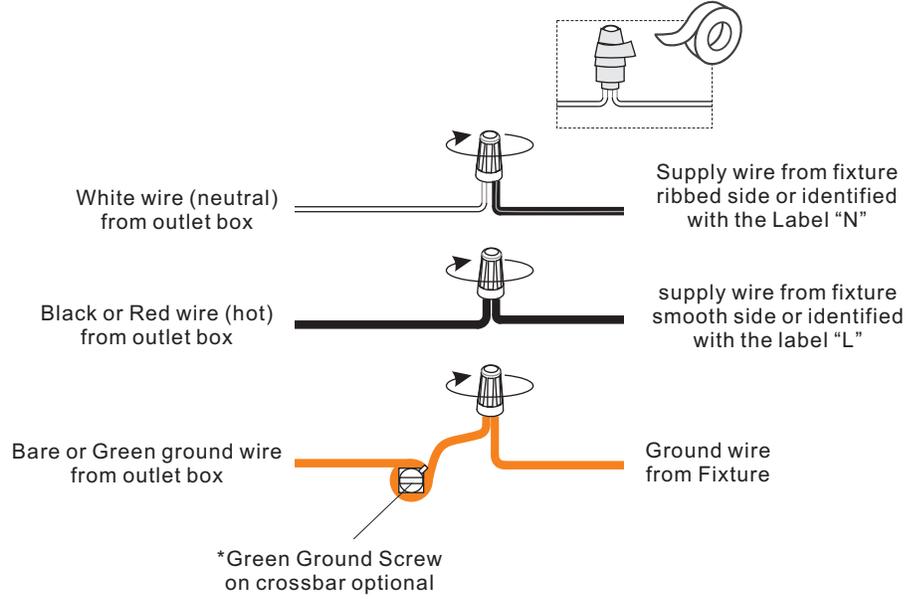


STEP 5

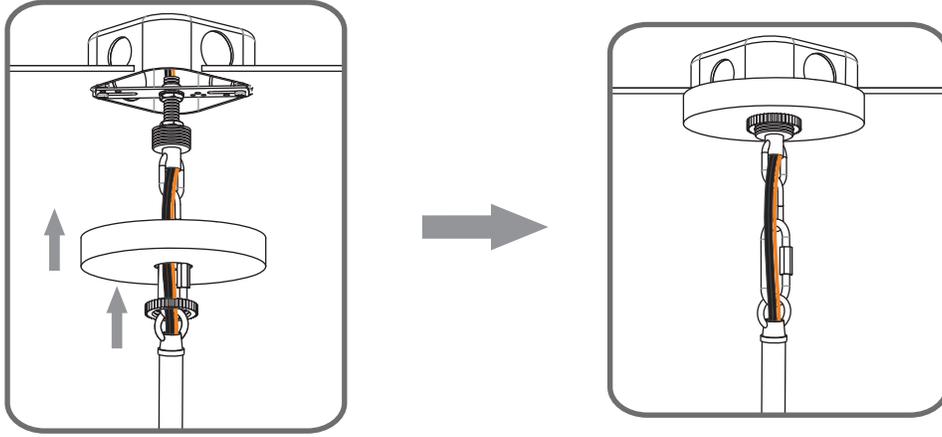

STEP 6


1

Remove socket collar





2

Place the ring



3

Install shade with ring

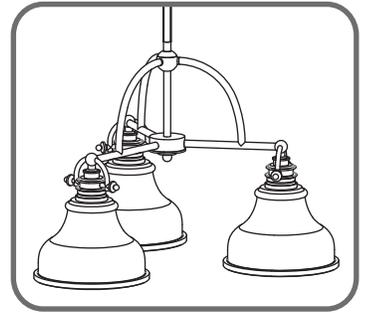

STEP 7

