

E26 Bulb Indoor Luminaires

Ceiling Mount – Multi Round Pendant

120VAC / 60Hz

Model #: LRTP07MBxxRND3

Safety Precautions

- Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.
- It is recommended that a qualified electrician perform all the wiring. This fixture must be wired in accordance with all national and local electrical codes.
- Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- This fixture is designed for use in a 120VAC / 60Hz circuit.
- Make sure that the power source conforms to the requirements of the fixture. (See labels on the fixture housing).
- To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) contact between this fixture and the ground connection of your main power supply panel.
- This fixture is intended to be used for general indoor lighting in dry or damp locations.

Assembly Instructions

Step 1 – Preparing for installation

- Disconnect electrical power** at the fuse or circuit breaker box before installing or servicing any part of this fixture.
- Carefully remove the fixture and hardware kit from the carton.
- Remove components from the hardware kit.
- Remove the canopy (1) from the cover plate (5) by removing two barrel nuts (6) and detach the two hanging cables (3) from the hook location at the canopy side only. Carefully place the other half of the fixture to the side.
- Install the canopy (1) to the 3-0 or 4-0 junction box (not included) using two screws (2) to secure it. Additional three holes on the canopy can be used if needed for additional support using appropriate hardware (not included).
- The fixture is provided with 108" adjustable cord (8). To raise fixture glass diffuser (9) from the floor to desire height by releasing the cable-locking screw on the side of strain relief connector (7) part of the cover plate (5). Carefully push excess cord inside the canopy until desired length is achieved. Re-tighten cable-locking screw to secure it. Dress excess cord neatly behind the cover plate.
- Re-attach the other half of the cover plate (5) to the canopy (1) using two hanging cables (3) to temporarily secure it.

Wiring – All wiring must take place inside the junction box (not included)

Caution: Make sure power is off at the fuse or circuit breaker box. Check power wires for damage or scrapes. Use wire suitable for at least 90°C (194°F).

Note: Most dwellings built before 1985 have supply wire rated to 60°C. Consult a qualified electrician to ensure correct branch circuit conductor before installing.

Step 2 – Wiring fixture

- Make all wire connections to appropriate wire. Secure with wire nuts (provided).
- Connect the green wire from the fixture to the supply source ground wire.
- Connect the black wires from the fixture to the black (L) wire from the supply power source.
- Connect the white wires from the fixture to the white (N) wire from the supply power source.
- Do not mix wires.** Pull on each wire lead to make sure connections are secure. Make certain no bare wires are exposed outside of wire connectors. Tuck all connections neatly into the junction box.

View shown for reference only. Individual models may vary.

Step 3 – Mounting cover plate

- Install the cover plate (5) by aligning both bottom holes to the threaded studs (4) using two barrel nuts (6) to secure it.

Step 4 – Adjusting fixture height

- Adjust cord length by loosening the strain relief screw (7) on the bottom of the canopy. Push the cord inside the canopy and re-tighten the screw once the fixture is at the desired height.


Step 5 – Lamping

- Install 3x medium base bulbs, E26 (Type A19, 60W max. – not included) into the socket twisting clockwise rotation until snug to secure it. Repeat this step until all bulbs are installed.

Step 6 – Installing diffuser

- Install the glass diffuser (10) by tilting the opening to one side and guiding the support bracket (9) completely inside the diffuser. Reposition the diffuser so it is centered on the socket assembly. If necessary, loosen the stem above the support bracket by turning it counterclockwise until the diffuser is fully seated. Retighten the stem to secure the diffuser. Repeat this step until all glass diffusers are installed.

Step 7 – Restore power at the fuse or circuit breaker box

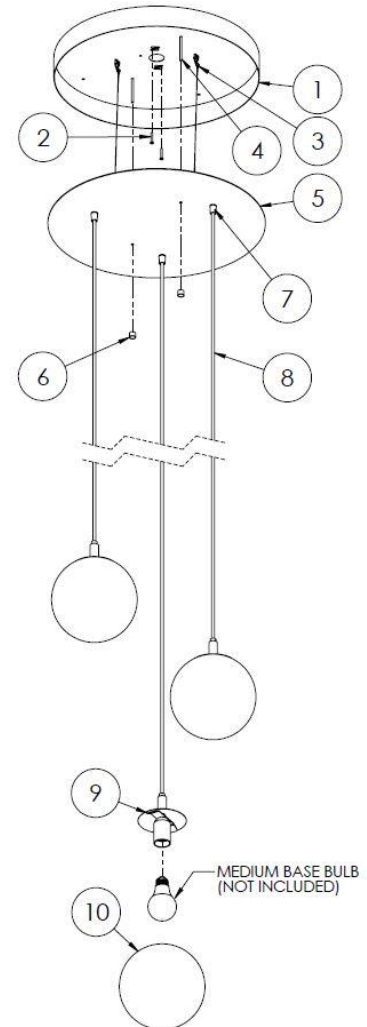

Limited Factory Warranty

AFX Inc. hereby warrants that this fixture is free from defects in materials and workmanship when installed and used under normal operating conditions for a period of 5 years from date of purchase. This warranty covers all component parts and extends only to replacement of defective fixture or components; it does not cover failure due to improper installation, misuse, mishandling or damage incurred in transit.