


Nest Swing User Manual




www.swingan.com
Support@swingan.com

2 Mill St. Cornwall NY 12518, 1-800-574-9323

Swingan - 37.5" Nest Swing With Adjustable Ropes
Version #2



2. a. Push the larger side of the tube over the smaller side of the tube. Repeat this for all tubes.
b. Close all four cover flaps.

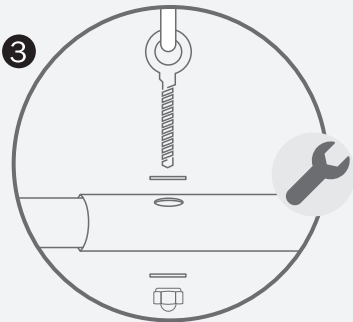

3. When the cover strips are closed, insert the eye bolts (from the end of the ropes) through the tubes. One eye bolt per tube. Use the wrench to tighten the nut onto the eye bolts.
4. Attach the swing to its place, with the quick link on top of the rope. Adjust the height of the rope accordingly.

INSPECTION AND MAINTENANCE

The frequency of inspection and maintenance will vary with the type of equipment or materials used or other factors (e.g. heavy use, levels of vandalism, coastal location, air pollution, age of equipment, ...). Special attention should be given to the swing hooks, rings, eights, plastic welds and ropes. Moving metal parts must be oiled regularly.

Routine visual inspection (weekly to monthly)

- Always check that the bolts and nuts are securely fastened.
- Check the shock absorbing surface for objects that don't belong there.
- Check for missing parts.
- Check the equipment ground clearances.

Operational inspection (1 to 3 months)

- Check the stability of the construction.
- Check every part for excessive wear and replace when necessary.

Annual inspection (1 to 2 times per year)

- Check for rust and corrosion.
- Check every part for excessive wear and replace when necessary.






INSTRUCTIONS FOR USE

SAFETY INSTRUCTIONS


- 1 - Please keep this instruction sheet safely for future reference.
- 2 - Please do not modify the product or the assembly details in any way. Modifications will affect the structural integrity and replacement parts will be at the buyer's expense.
- 3 - Inappropriate use or faulty application of the product are explicitly forbidden and absolve the manufacturer of all liability. This product needs to be mounted by an adult before use.
- 4 - The use of the item is allowed only under continuous supervision by an adult.
- 5 - The product can bear a maximum load of 150 kg / 330 Lbs. The product is not suitable for children under 36 months, due to a lack of extra safety precautions and taking into account the limited mental capacities of toddlers.
- 6 - This product meets all security aspects of the European standard EN71-1, EN71-2, EN71-3 and EN 71-8. It is only suitable for family domestic use, both indoors and outdoors.
- 7 - When installing the product, ensure that the play system or other construction can support the weight (minimum 200 kg / 440 Lbs) and that there is no risk of entrapment.
- 8 - The product should be at a distance of at least 6 ft from all other installations e.g. fences, branches, clothes-line, ...
- 9 - In this safety area no hard, angular or pointed objects should be present. The surface underneath the product should be flat and shockabsorbing. The product must not be placed on asphalt, concrete or any other hard surface. We advise the removal and storage of all accessories during the winter because the characteristics of the soil (when frozen) are not suitable for safe play.
- 10 - The distance between the suspension points along the crossbeam equals or is more than the distance between the junction points of the product, plus 4% of the distance between the ground and beam. See FIG I.
- 11 - The minimum distance from the bottom of the swing seat to the ground surface shall not be less than 14 inches. The minimum lateral free space should be 17.5".
- 12 - Specific instructions for adjusting the rope length : see FIG II. Ensure that the product hangs horizontal after adjustment of the ropes.
- 13 - Please ensure that the crossbeam is never higher than 8 ft. Please make sure that children do not climb the product to reach the top beam.
- 14 - To avoid the swing from heating up, do not place it facing the sun. In warm weather, check that the seating surface is not too hot.
- 15 - All pieces should be checked regularly. For replacement material and expansion of the playground equipment, please contact the supplier. Consequently safety will be guaranteed.
- 16 - This product can only be used in combination with sufficiently strong swing hooks with a nylon bearing. Only in this case the safety can be ensured. It is explicitly forbidden to use the metal rings on a suspension system without a hinged element.
- 17 - Make sure threaded fasteners connecting structural components have a locking mechanism, such as lock washers, self-locking nuts, or other features designed to hold up the swing securely.

PARTS LIST

• Take all parts out of the packaging and check if anything is damaged, and if all parts are present.

ITEM	PART IMAGE	MODEL	QT
A		Sail seat	1
B		Curved tubes with shock absorbing foam	4
C		Rope with ring and welds	2
D		Wrench	1
E		Quick link	2

How to adjust the ropes

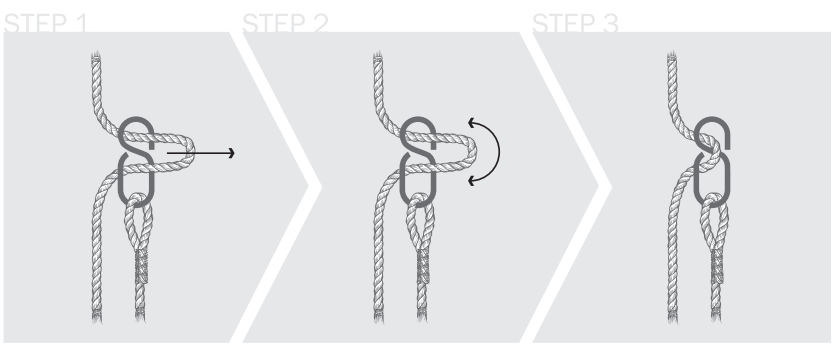


WARNING! For family domestic use only. Not suitable for children under 3 years.
To be used under the direct supervision of an adult. Long cord, risk for strangulation!
Risk of falling!

HOW TO INSTALL

- A - Distance between the suspension points along the crossbeam.
- B - Distance between the junction points of the swing element and the means of suspension.
- h - Distance from the ground to the lower side of the crossbeam.

The distance of A can be calculated by taking the measurement of the height and multiply it by 0.04, you will then add the measurement of the width. The distance of A should be equal to or greater than that amount.

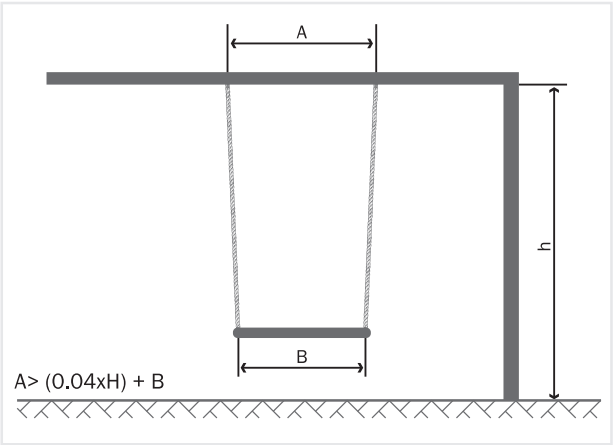


Example :

H=8.3 ft (100 inches) B=25.5 inches

$(0.04 \times 100\text{inches}) + 25.5\text{ inches}$ $A > 29.5\text{ inches}$

ASSEMBLY STEPS

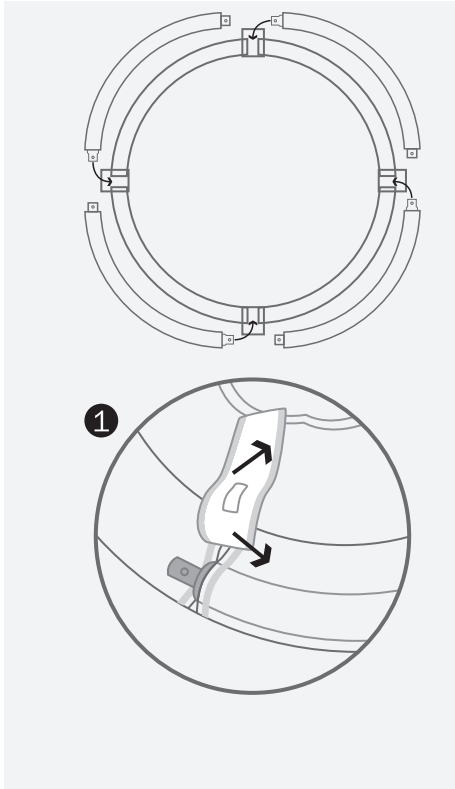

1. Open the flaps of the sail seat. Insert the four curved tubes into the sail seat through the flap openings, forming a circle. Do not remove the shock absorbing foam from the tubes.