
REPTI ZOO
living in nature

Living In Nature

INSTRUCTION MANUAL OF HO T5 UVB LIGHTING COMBO KIT

AT28

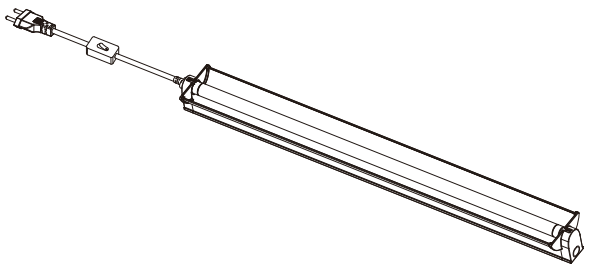


Thanks for choosing our company's products. In order to use this product properly and ensure its service life, please read the instructions book carefully before using it.

1.PRODUCT OVERVIEW

This product is a simple, fashionable, efficient and energy saving T5 UVB lighting combo kit. It provides UVB for pets, which promotes the absorption of calcium. It is suitable for REPTI-ZOO RK glass terrariums, RHK reptile glass terrariums, AC full air screen cages and other reptile terrariums and aquariums.

2.PRODUCT LIST

1. Lighting hood：1 pc
2. T5 UVB lamp：1 pc
3. Power cord： 1 pc
4. Instruction manual：1 pc
5. Accessories includes hanging plate 2pcs, self-tapping screw 2pcs, M3 screw 4pcs and butterfly nut 4pcs.

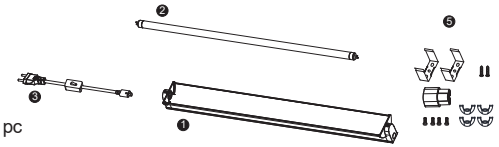

3.PRODUCT FEATURES

1. Fashionable aluminum alloy shell and efficient heat dissipation.
2. Quick plug power cord with independent switch, it is practical and easy to disassemble.
3. A variety of installation methods. It can be installed on wooden vivariums, glass terrariums, screen cages, etc.
4. High specular reflector can effectively improve the output efficiency, promote the absorption of calcium for pets.
5. Built-in high quality ballast, quick to start and no flicker.


4.TECHNICAL PARAMETER

1. Voltage：AC220~240V/50-60HZ
2. Power cord length: 1.5 meters
3. Size and wattage

MODEL	SIZE（mm）	Max WATTAGE（W）	REMARK
AT2808ST	315x58x42mm	8W	Suitable for T5 UVB 8W lamp
AT2824ST	575x58x42mm	24W	Suitable for T5 UVB 24W lamp
AT2839ST	875x58x42mm	39W	Suitable for T5 UVB 39W lamp
AT2854ST	1175x58x42mm	54W	Suitable for T5 UVB 54W lamp

5.INSTRUCTIONS


Install the lamp:
Align the pins on both ends of the lamp with the notches of the lamp holder and press them in gently, turn it clockwise or counterclockwise 90 degrees, and you will hear the “click” sound. That means it is well installed.

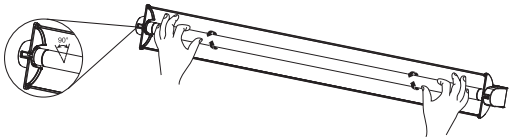


Installation and fixation:
(1) Installed lighting hood outside the terrarium:
Place the strip light fixture on top of the terrarium, and keep away from water surface at least 15mm.




(2) Installed inside the terrarium:
Choose mounting position to assemble hanging plate. First, use a self-tapping screw (TA4.0*20) to drill holes in the mesh cover and then take them out. Then fix the two sides of the hanging plate and the mesh cover with M3 screw and butterfly nut respectively. After the hanging plate is fixed, push the lamp into the clamping position of the hanging plate.

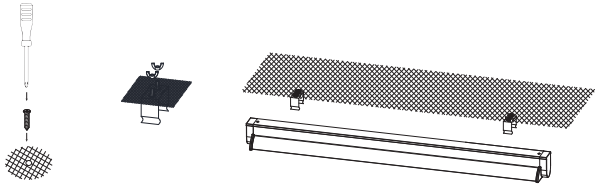

(3) Installed on the vivarium:
After install the mounting plate, use self-tapping screw (TA4.0*20) against the middle hole of the hanging plate to firmly lock the screw onto the board. After the hanging plate is fixed, fix the lamp into the clamping position of the hanging plate.

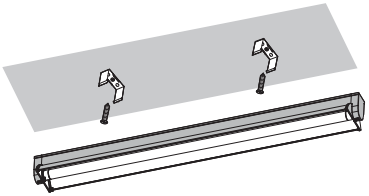

(4) After install lamp fixture, install negative connector plug on power cord onto the lighting hood and positive connector plug to socket, and turn on the power.

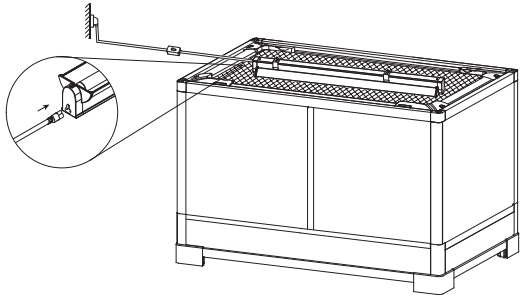

(5) Up to 4pcs lamp hood can be connected in series at the same time.



6.LAMPS REPLACEMENT


1. Power off and unplug light fixture. Allow lamps to cool down.
2. After lamp cool down, remove the lamp from the hanging plate.
3. Rotate the lamp and remove.
4. Insert new lamp, turn it clockwise or counterclockwise 90 degrees, and you will hear the “click” sound. That means it is well installed.
5. Plug in light fixture and power on.

Attention: Failure to do so may result in electric shock, burnout of the lamp, or even fire.

7.Reflector Disassemble and Assemble Instruction


Disassemble Instruction

1. Push the reflector to the other side of the lighting fixture so that the arrow label side is completely exposed outside the plastic cover.
2. Pull the arrow label side reflector out of the aluminum alloy and leave a finger gap.
3. Slide to the other side so that the reflector is all out from the aluminum alloy

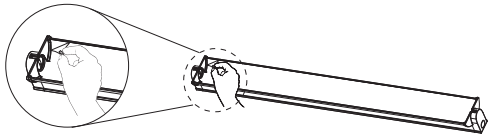

Assemble Instruction

1. Put the long side of the reflector closely to the aluminum alloy slot, then squeeze the other long side by hand, so that more than 50% of
the left or right side of the reflector is limited in the aluminum alloy slot in the other side.
2. Squeeze the short side of the reflector into the slot of the plastic cover.
3. Press the middle of the reflector so that the entire reflector is in the aluminum alloy slot to complete the installation (arrow label is exposed).

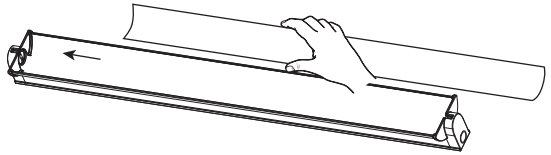

8.SAFETY AND MAINTENANCE

1. Before use, check the equipment and sensor cables for damage, deformation, etc. to use, the equipment should be tested and repaired by the manufacturer or its service agents or relevant professionals to prevent dangerous.

2. Before installation and maintenance of this product, the plastic part of the plug must be held to pull it out of the power supply. It is forbidden to pull the plug out of the socket by pulling the power cord.

3. Do not move or pull the power cord when the product is working. If the installation needs to be moved or changed, the power must be turned off.

4. The installation position of the fixture should avoid contact with water, and keep away the distance from water level at least 15mm.

5. When not in use, unplug the product from the electrical outlet.

6. This product is not suitable for children with a lack of normal behavioral ability, or with neurological or mental disorders, or lack of experience use it separately with related knowledge. To use this device, the above persons must be experienced adults supervise and direct and ensure safe operation.

7. It is not recommended to use all accessories of this product for other purposes, as this may cause unsafe factors.

9.IMPORTANT SAFETY INFORMATION

[WARNING] Failure to follow these safety instructions may result in fire, electric shock, injury, or damage to your pet's life and other property.
[USE] Please read all the safety information below before using this series of lamps.
[OPERATION] Please handle this series of lamps with care. This product is composed of aluminum alloy metal and plastic, and contains sensitive electronic components inside. The product is only for indoor use, please do not use this product on the non-specified reptile terrariums and aquariums, if this series of lamps and accessories are dropped, burned, squeezed, or contact with liquid, it may be damaged. Do not use the damaged lamps.

Dongguan ETAN Pet Supplies Co.,Ltd.
No.3 JinXingEr Road, Qingxi Town,
Dongguan City, Guangdong Province,
China. 523655
Tel: **86- 769- 87841199**
Tmall: **reptizoo.tmall.com**
Overseas Sales: **postmaster@repti-zoo.com**
China Sales: **market_one@repti-zoo.com**
www.repti-zoo.com

Intertek
5000456