


Features

- Acrylic
- Rectangular shape
- Integral apron with removable access panel
- 120 BubbleMassage™ airjets
- Blower motor is supplied with a grounding-type plug-in cord
- Molded lumbar supports and armrests
- Blower motor with 300 W heater and electronic user control
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)

BATH WITH AIRJETS K-1112-GLA ALSO K-1112-GRA

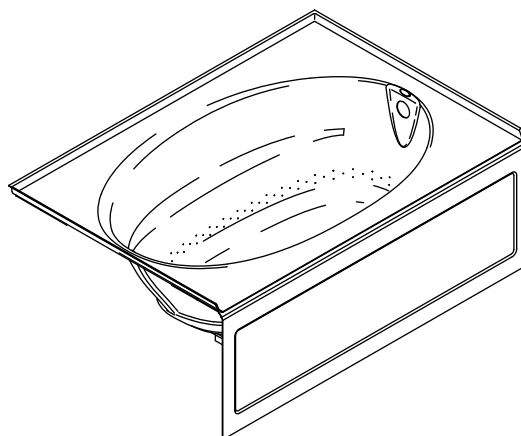

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- IAPMO IGC 171
- ASTM E162
- ASTM E662
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1112-GLA	Bath with airjets – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1112-GRA	Bath with airjets – right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories			
K-7166-AF	Pop-up drain with tailpiece – above or through-the-floor installation OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-11677	Trip lever drain with tailpiece – through-the-floor installation	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath with airjets shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Product shall have an integral apron with removable access panel. Product shall have a blower motor with 300 W heater, and an electronic user control. Product shall include a blower motor which is supplied with a grounding-type plug-in cord. Product shall feature 120 BubbleMassage airjets, molded lumbar supports, and molded armrests. Product shall be rectangular in shape. Bath with airjets shall be Kohler Model K-1112-____-____.

WINDWARD™

Technical Information

Fixture*:				
Bathing well:				
Basin area bottom	43" (1092 mm) x 20-1/2" (521 mm)			
Basin area top	53-1/2" (1359 mm) x 32-1/8" (816 mm)			
Weight	120 lbs (55 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	57 gal (215.9 L)			
* Approximate measurements for comparison only.				
Drop-in cutout dimensions:				
58-1/2" (1486 mm) x 40-1/2" (1029 mm)				
Blower motor	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 5 A, 60 Hz

Locate the outlet behind the bath and within 24" (610 mm) of the pump.

Installation Notes


Install this product according to the installation guide.

Floor support under this must provide for a minimum of 36 lbs/square foot (174 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.



No change in measurements if connected with drain illustrated. (K-11677)

 Recommended faucet area



Tile Flange Detail

Blower/Control Access
20" (508 mm) W x
15" (381 mm) H Min

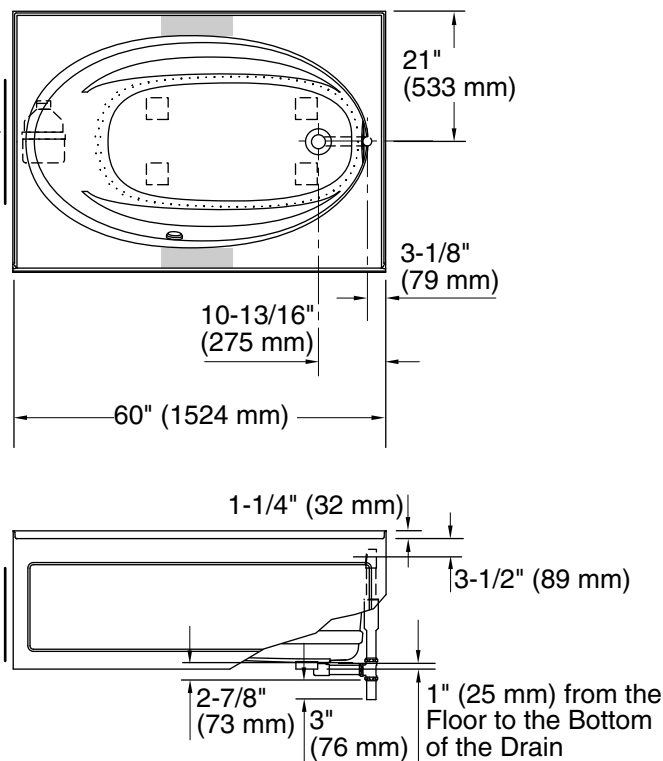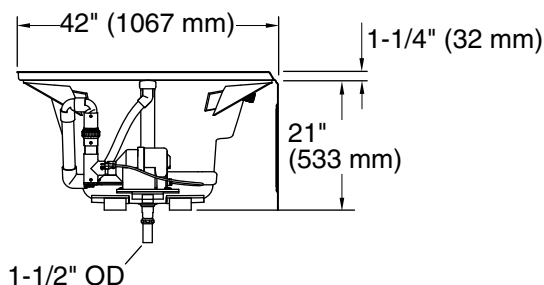

Product Diagram