


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

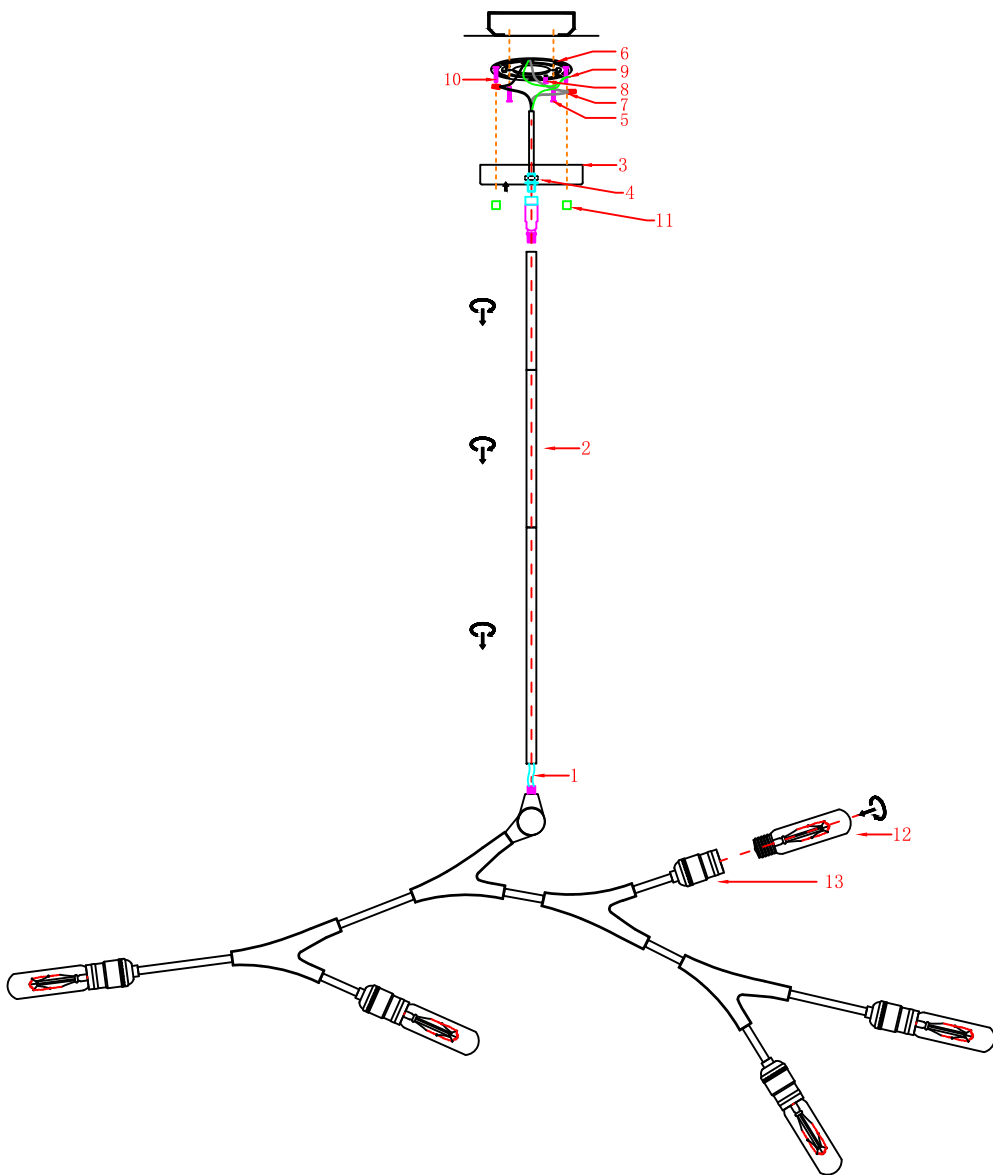

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Thread the main cord (1) through the desired number of suspension rods (2) for height adjustment, then pass it through the canopy (3). Secure the canopy with the nut (4).
 2. Mount the mounting plate (6) to the junction box using the screws (5).
 3. Wiring Connections
 - Use wire connectors (7) to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire.
 - Ensure no exposed conductors remain outside wire connectors or outside the junction box.
 - Secure the fixture ground wire (9) and supply ground wire to the mounting plate (6) using the ground screw (8).
 4. Place the canopy (3) over the mounting plate, aligning the mounting studs (10) with the holes. Secure the canopy by tightening the decorative nuts (11).
 5. Install the light bulb (12) into the socket (13). (Bulb Not Included)
- Installation is complete.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.