ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

- 1. Find a clear area in which you can work.
- 2. Unpack fixture and glass from carton.
- 3. Carefully review instructions prior to assembly.

SAVE THESE INSTRUCTIONS:


Note: This Luminaire is designed for use with 9-15 volt landscape systems. Connection to other systems may cause premature failure or non-intended operation.


LUMINAIRE MOUNTING: (for typical ground stake mounting)

- 1.To prevent electrical shock, disconnect transformer from electrical supply before installation or service.
- 2. Run wire from Luminaire through mounting hole in top of ground stake.
- 3. Attach Luminaire to ground stake by threading to the mounting hole in stake until it fits snuggly against the bottom of stem.
- 4. Place stake in desired position and insert into ground until the flange of stake is flush with ground.
- 5. Strip the two wire leads from the Luminaire and connect to the main supply wire using the provided silicone filled wirenut. Silicone filled nuts are intended for one-time use. Wire Nut Capacity -2 pcs 18 AWG2 pcs 12 AWG

The main low voltage cable from the Luminaire is to be:

- 1. Protected by routing in close proximity to the luminaire or fitting, or next to abuilding structure such as a house or deck.
- 2. The main secondary wire is intended for shallow burial-less than 6 inches(15.2cm)
 - in order to connect to the main low voltage cable.

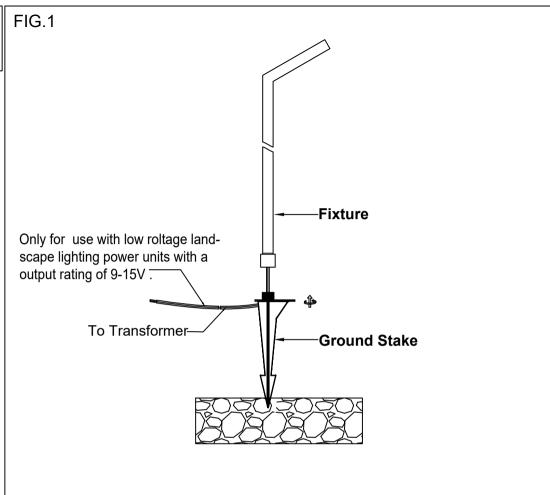

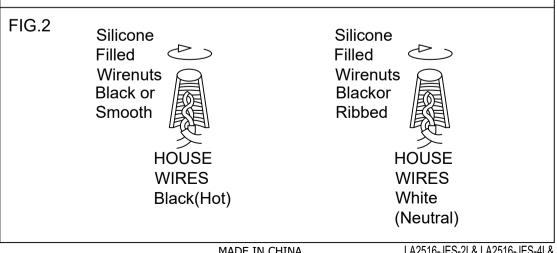

MADE IN CHINA

LA2516-JES-2L& LA2516-JES-4L& LA2516-JES-10L