





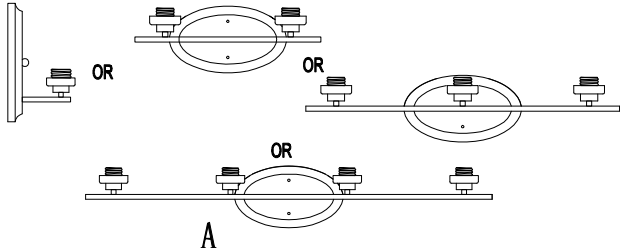

Installation Instruction

WARNING: TURN OFF ELECTRICITY at main fuse box(or circuit breaker box)before beginning installation by removing fuse (or switching off circuit breaker)


CAUTION: CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR. If in doubt about electrical installation,consult a licensed electrician.

Contents: Before getting started,ensure the package contains the following components

 <p>A</p>	 <p>B</p>	 <p>C</p>	 <p>D</p>	 <p>E</p>	 <p>F</p>
<p>Fitter x1</p>	<p>Mounting Plate x1 set</p>	<p>Acorn Nut x2</p>	<p>Glass Shade x3 (1, 2, or 4)</p>	<p>Mounting Screw x2</p>	<p>Wire Connector x3</p>

ASSEMBLY INSTRUCTIONS:

Notes: These fixtures can hang up and down to the wall.


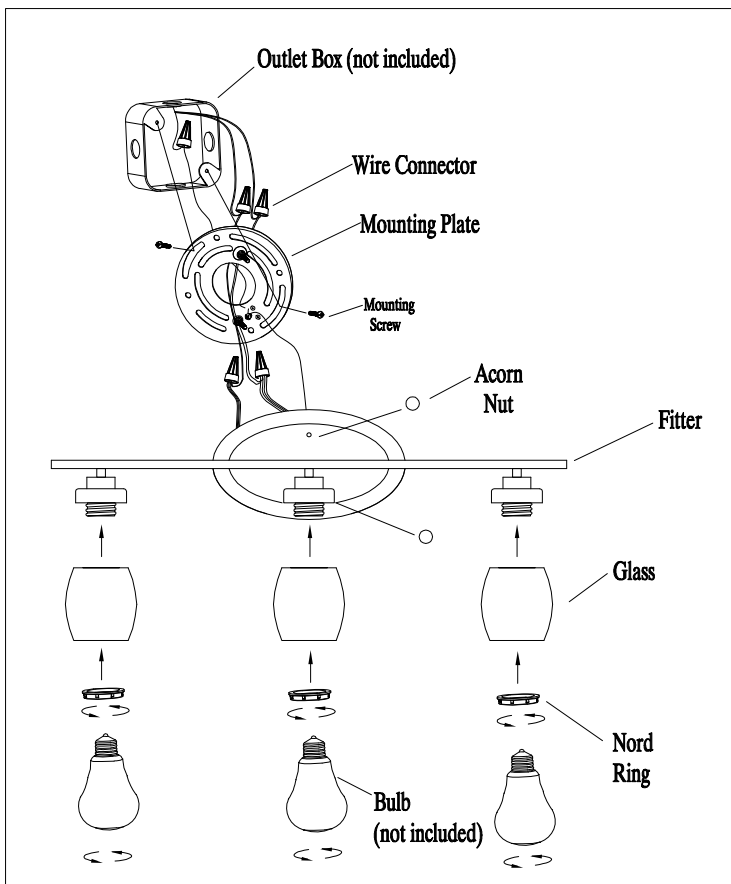


STEP 1: Pull the power supply wires from the Outlet Box ,and strip 3/4in. of insulation from wire ends for each wire.Twist stripped ends of supply wires and fitter together with pliers,black to black(Live)and white to white(neutral).Attach copper wire of fitter to the ground wire of supply.

Helpful hint: if necessary,attach copper ground wire to grounded junction box.

STEP 2: Attach wire connectors(F) to the wires.Tape wire connectors and wires together.

STEP 3:Push connections and splices into Outlet box .

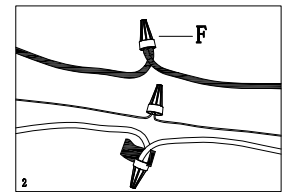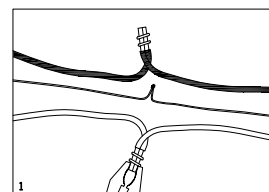

STEP 4: Mount the Backplate (B) to the Outlet Box and the wall by Mounting screws(E)

STEP 5: Place the Fitter(A) over the Mounting Plate(B) by 2pcs Acorn Nuts(C).

STEP 6:Take off the Nord Rings from the socket bases and put the glass shades(D) onto the screws of socket and screw back the Nord Rings onto the socket bases.

STEP 7:Screw Bulbs(not included) in the socket bases.

