
IMPORTANT SAFETY INSTRUCTIONS

• To avoid injury or damage, mount only on a surface that is sturdy.

• To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box. Note: Some types of fuses must be unscrewed to shut the power off.

• If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE LAMP: Check the contents of the box. Box should contain all items on the parts diagram.

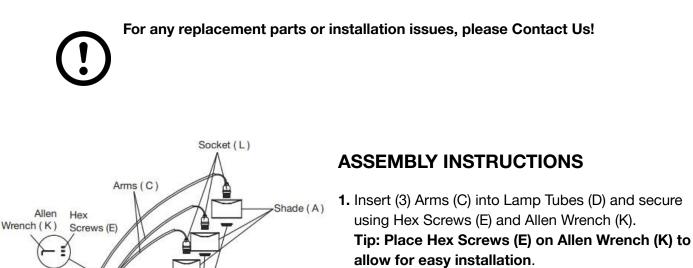

Socket Rings (B)

Lamp Tubes (D)

Pole Cap (F)

Small Pole (H)

Large Pole (1)

Base (J)

Screw

Lock (G)

- **2.** Insert Pole Cap (F) into Small Pole (H). Ensure that the hole on Pole Cap (F) lines up with the squared opening in Small Pole (H).
- Secure Pole Cap (F) to Small Pole (H) with Screw Lock (G) by turning in clockwise direction. Screw Small Pole (H) to Large Pole (I). Screw Large Pole (I) to Base (J). Pull excess cord if necessary.
- 4. Evenly spread Lamp Tubes (D).
- 5. Fasten Shades (A) onto Sockets (L) using Socket Rings (B).
 Note: Socket Rings (B) are threaded onto Sockets (L).

Enjoy your new lamp!