



Automatic Feeder


PHP-004 V1.0 EN

Contents


Hardware Installation and Introduction	1
Time Settings.....	3
Manual Feeding	4
Scheduled Feeding	5
Feeding Voice Recording	6
Turn on/off Blue LED	8
Feeder Alarm	8
Others	9
Reset To Factory Default	9
Warranty	10

Hardware Installation and Introduction


- 🐾 Open the battery compartment at the bottom of the feeder, insert the Micro USB power cord into the connector on the bottom, and extend the power cord out along the designed wire guide. You could also put in 3 pieces of D cell batteries, so that the feeder can still work automatically according to your scheduled feeding plan even without external power supply. Turn on the power switch.

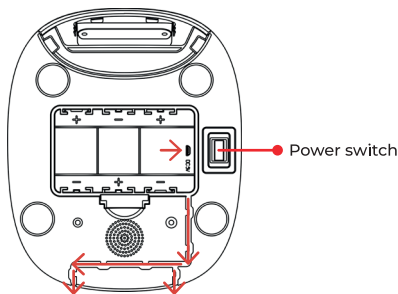


Rotate the knob on the top cover, the feeding tray is in the grain bucket. Then place the feeding tray into the feeder from the front.

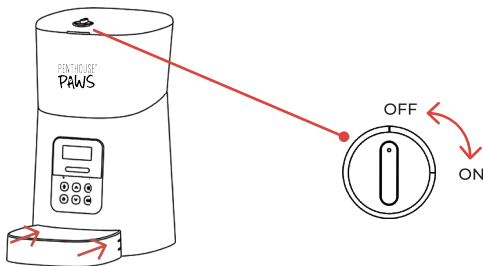

For your pet's health, please wash the grain bucket and feeding tray regularly. The feeder body should not be filled with water. Please use a wring-able wet cloth to wipe.

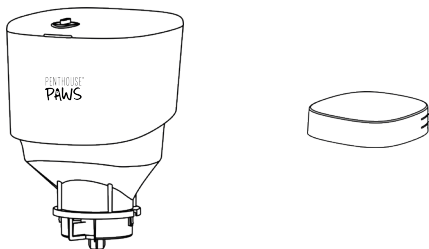

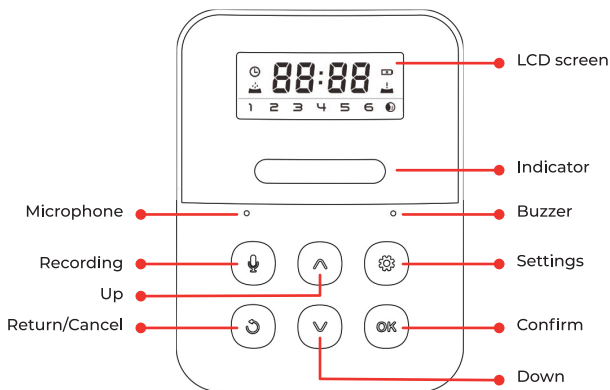

🐾 Attention the following operation panel introduction:



Note:


Due to the wide variety of pet foods on the market, the mechanical structure of the feeder can not guarantee a 100% fit of all types of pet food.

Time Settings


-  The automatic feeding depends on the correct clock settings in the pet feeder. Please set the clock before setting up feeding plan. Long press the  setting button for 2 seconds, the icons start to be flashing, it is in settings mode. As shown in **Fig1**, the clock icon is flashing in default to ready to set up clock.

Press **OK** button to confirm to enter the time setting. The hour is flashing as shown in **Fig2**. Use the up/down selection buttons to set the hour (Time -24hour clock) as shown in **Fig3**. You can long press the up/down selection button for fast setting. Press **OK** to confirm the hour. Then the minute start to flash, press the up/down selection button for minute setting, as shown in **Fig4**

OK to save and return to settings mode. Press Back/Cancel button to exit or go on to set up other settings.




Tips:


All operations during the setup process can be returned or canceled via the  Back/Cancel button.


The signs/numbers shown in screenshots enclosed by the dotted line represent the actual icon/number in the operation screen.



Manual feeding

-  The feeder supports fast manual feeding and a scheduled number of manual feeding functions. In the standby state, you can quickly feed 1 portion by quickly pressing down button twice within 1 second.


Feed right now for multiple portions:

Long press  button for 2 seconds to enter the setting mode. Press down button to switch the flashing icon to the feeding one as shown in **Fig5**.

Press  to confirm and manual choose the feeding portions. You can use the up/down selections button to choose, as shown in **Fig6**.



Press  to start feeding. Meanwhile, the operation screen will display the exact remaining portions need to feed as shown in **Fig7**



7

Scheduled Feeding


- The pet feeder support the scheduled feeding exact portions at exact time. The feeder supports up to 6 meals per day. Press button for 2 seconds, enter the setting mode. Press down button to switch the flashing icon to Digital 1 icon. As show in **Fig8**.

Press **OK** to select the feeding portions, press up/down button to set portions as shown in **Fig9** and **Fig10**.


Press **OK** to go for feeding time setting as shown in **Fig11** and **Fig12**, Press **OK** to save. Press Back/Cancel button to exit and the auto feeding icon will show at standby state, as shown in **Fig13**.




8




9




10



11





12





13


If you need a automatic feeding for multiple meals, please repeat the above steps and select the corresponding Digital number icon according to the meals in the setting interface as shown in **Fig14**.





To cancel a certain automatic feeding, you can set the feeding portions to be 0. Then second feeding was cancelled as shown in **Fig16** and **Fig17**.



Feeding Voice Recording


-  To develop the good feeding habits for pets, the feeder supports pre-recording a maximum of 10 seconds of audio, which is played during scheduled feeding.



In standby state, press and hold the  record button for 3 seconds until the feeder makes a “Drip” sound, and you can start recording at the microphone position. Note that the recording button should always be pressed continually 10 seconds during recording. After the recording is completed, the feeder will make two “Drip” sound.

After recording done, you can preview the recorded audio by short pressing the  record button. If you need to change the recording,

please re-record it. The closer to the microphone, the louder voice can be recorded.

The default of voice recording playback is 3 times. It can be customized 5 times max at the setting:

- Press and hold the  setting button for 2 seconds to enter the setting mode.
- Select the down button to switch the flashing icon to recording button as shown in **Fig18**.
- Press **OK** to confirm play times of recording playback by using the up/down buttons as shown in **Fig19**.
- Press **OK** button to save. To cancel the feeding recording and playback, You can set the number of playback to 0.



Important Notice:

The pet feeder recording will be played only during scheduled feeding. It will play the times as setting, ex. 3times/4times/5times... even the feeder finish feeding.


When pet food blocked at the food tray, the pet feeder will stop the feeding to pets for 10 minutes. And the voice recording will be played 1 time per minute to call the pets. If pets finished the food at the tray, the pet feeder will work as scheduled feeding. Otherwise it will stop feeding if the pets still didn't finish feeding after 10 minutes.

Turn on/off blue LED


- When the feeder is turned LED on in blue, you could press **OK** for 6 seconds to turn off/on blue LED. Please notice, only when the feeder is powered by USB cord and the feeder's LED is not in red at this time, the operation can be operated normally.

Feeder Alarm

- When the battery is low, the screen will be displayed low battery sign as shown in **Fig20**. When the food is insufficient, the screen will display the low food storage as shown in **Fig21**; When these two cases happened, the indicator light will be in red. After renewing the battery or re-filling enough food, the red indicator and screen icons will disappear automatically within 60 seconds.



20




21

When the food is stuck in food bucket, the screen will display as shown **Fig22**. The indicator LED will be in red. Please clean up the stuck food manually, and reboot the pet feeder.



22




Others

-  Whenever the pet feeder released any of red indicator light, it means that the feeder has a notification message. Please follow the screen signs remind and cope with them in time according to manual book illustrated.

The back-up battery is designed for short-term alternative when the external power supply is cut. Attention! When the pet feeder works with battery back-up, it will go to sleep mode and some of functions will be limited:

- 1)** There will be up to 60 seconds delay for the screen display and scheduled time feeding.
- 2)** The blue LED will be turned off automatically.
- 3)** For any operations when the screen is off, press any button to wake up the pet feeder from sleep mode.

Reset To Factory Default

-  If want to delete all previous setting, you can reset the feeder to factory default. In the standby state, press and hold the  setting button and  button at the same time for 3 seconds until the feeder makes a short beep.

Warranty

12 month warranty

Life-time support

Please contact help@penthousepaws.com for warranty issues or questions.