




Directions for use

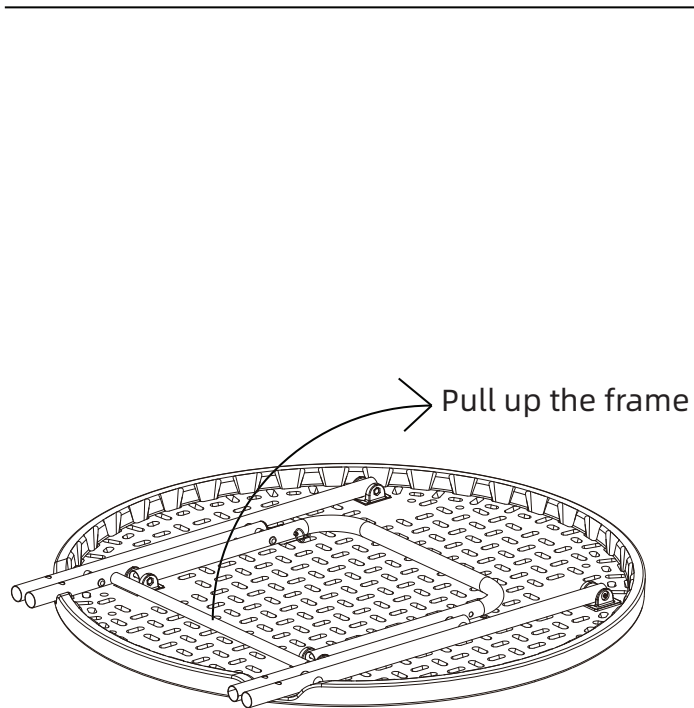


Pull up the legs to open the table.

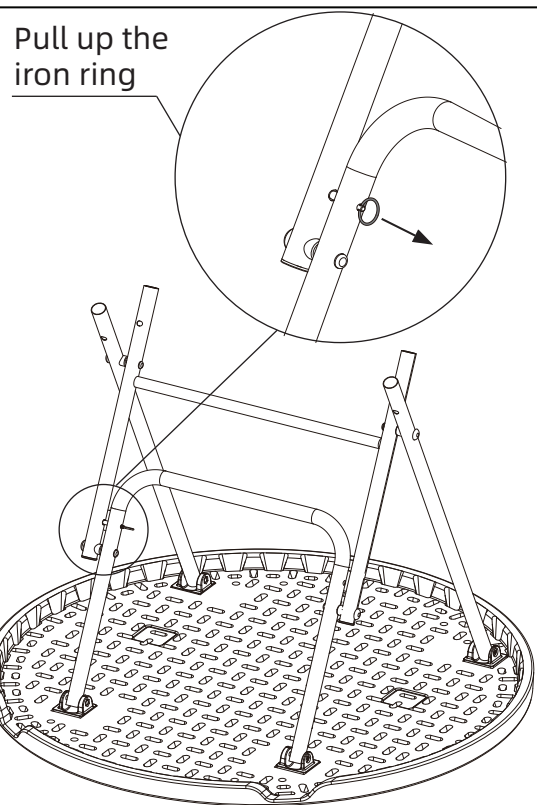

As you pull up the iron ring, locking buckle will lock the bifurcated legs.

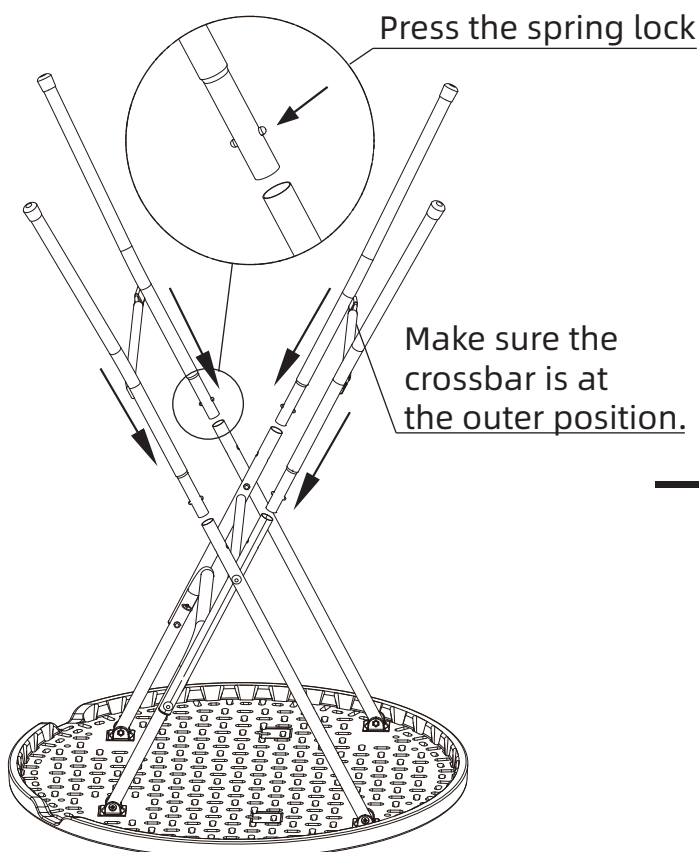

Insert the removable legs into the corresponding mounting holes.

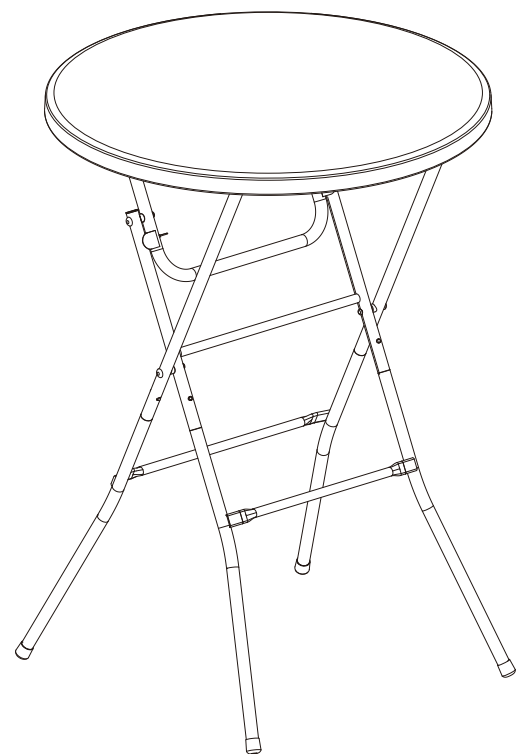

The Installation is completed and the table is ready to use.
