

# Clark I Light Sconce

---

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

### CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

**SAVE THESE INSTRUCTIONS!**

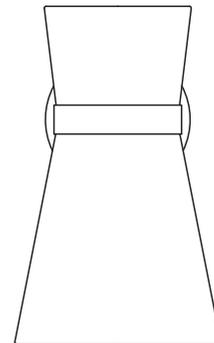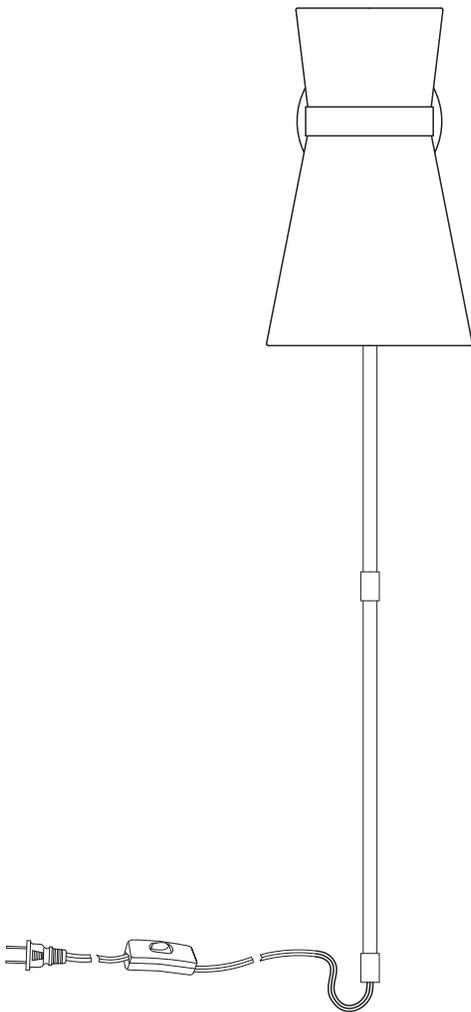

# Install the Fixture

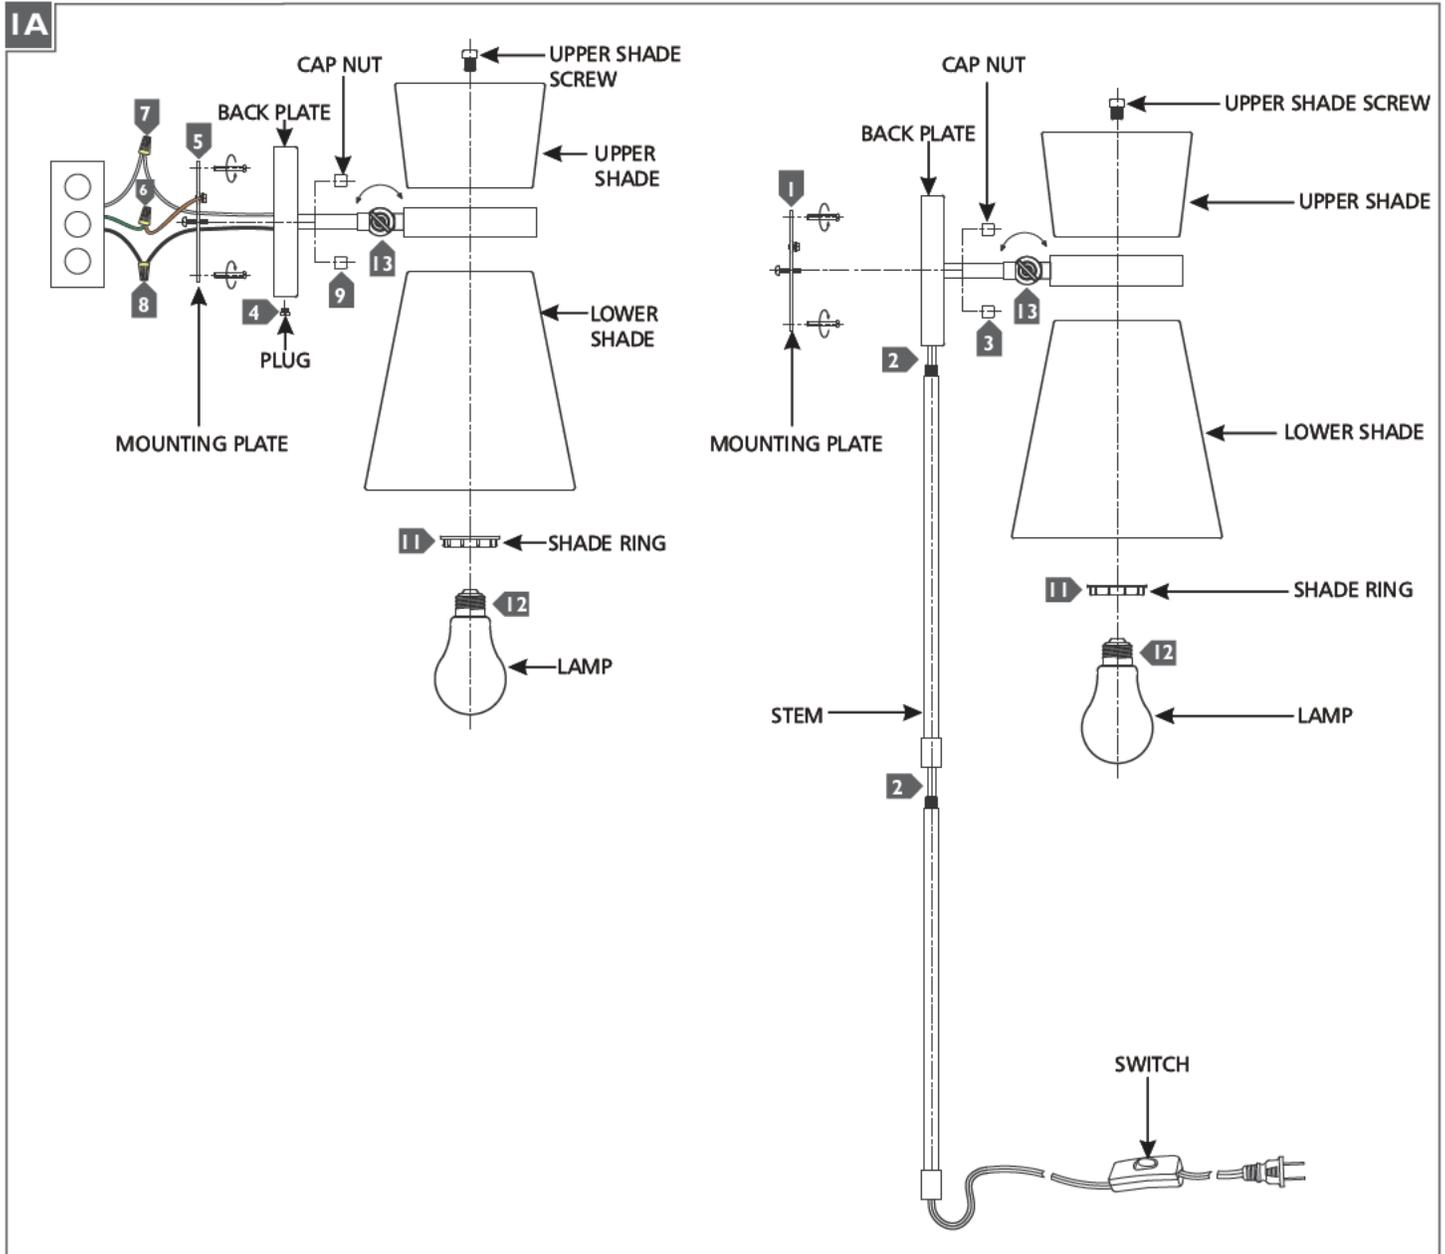

- 1** Plug in cord mounting: (for junction box power mounting skip to step 4) properly secure the mounting plate to the wall or junction box.
- 2** Screw the stems together then onto the fixture base.
- 3** Install the fixture onto the mounting plate and secure it in place using the cap nuts. Skip to step 10
- 4** Junction box power mounting: disconnect the cord wires from the fixture wires by removing the wire nuts, carefully pull the cord out of the fixture, then close the cord hole by screwing the provided plug.
- 5** Secure the mounting plate to the junction box.
- 6** Connect the fixture ground wire to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.
- 9** Properly place all wires and wire nut connections into the junction box/fixture base, install the fixture onto the mounting plate and secure it in place using the cap nuts.
- 10** Install the upper shade onto the socket assembly and secure it in place with the upper shade screw.
- 11** Install the lower shade onto the socket and secure it in place with the shade ring.
- 12** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 13** Adjust the fixture as needed.