

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

### MOUNTING THE FIXTURE


#### Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Drill two holes in the wall, distance and the same distance from the keyhole of mounting plate. Attach the mounting plate to the wall, aligning the plastic anchors and junction box, lock it securely with the two wood screws and the two box screws. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
3. Guide fixture wires through hole in center of mounting plate.
4. Follow wiring instructions carefully (see fig.2)
5. Place the backplane(B) over the mounting plate, aligning the backplane holes with screw hole of the mounting plate, then lock it securely with ball nut(C).
6. **Install the light bulbs in accordance with the fixture's specifications. NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
7. Attach the glass shade(A) inset the cover of lamp holder, by turning it clockwise until tight.

#### Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

**Fig.1**

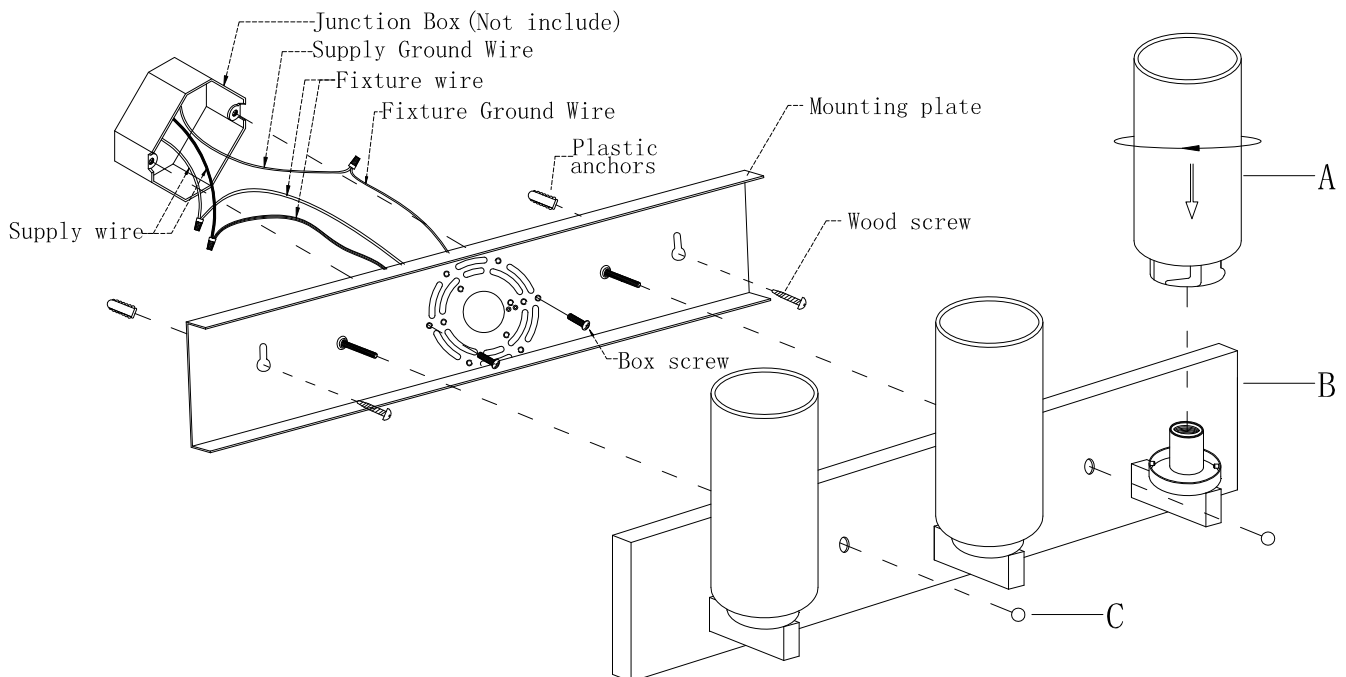

**Fig.2**

<p>FIXTURE WIRES</p> <p>Black or Smooth</p>		<p>FIXTURE WIRES</p> <p>White or Ribbed</p>		<p>FIXTURE WIRES</p> <p>Bare Copper (Ground)</p>	
HOUSE WIRES	Black (Hot)	HOUSE WIRES	White (Neutral)	HOUSE WIRES	Green or Bare Copper (Ground)