
SKU:

LX-TC1203T-XX-BL

LX-TC1203T-XX-WHT

ASSEMBLY INSTRUCTIONS

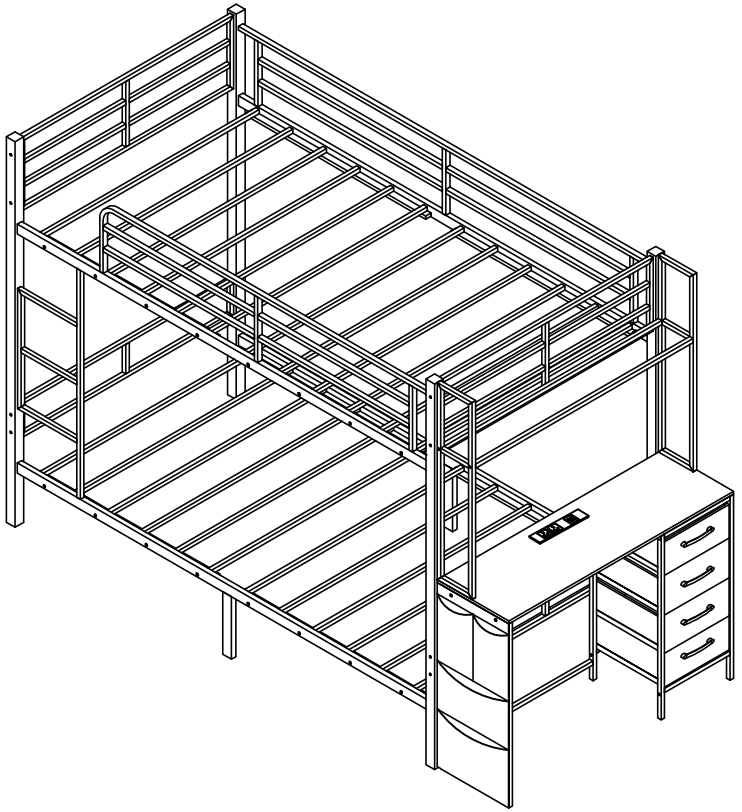

SAFETY WARNINGS AND GENERAL NOTES

Safety Warnings and General Notes

Before Assembly

Adult assembly required. Two adults are recommended.
Check all parts and hardware against the parts list before assembly.
Assemble the bed on a flat, clean, and level surface.
Do not fully tighten bolts until the step instructs you to do so.
Keep small parts and packaging away from children during assembly.

Bunk Bed Safety

Do not allow jumping, climbing, or rough play on the bed.
Do not allow anyone under 6 years of age to use the upper bunk.
Only one person should use the upper bunk at a time.
Use only the recommended mattress size.
The top surface of the mattress must be at least 5 in. below the top edge of the guardrails.
Do not use a water mattress or flotation mattress.
Do not hang ropes, cords, belts, or other items from the bed frame.


Product Specifications


Bed type: Twin over Twin bunk bed with desk
Recommended mattress size: Twin, 75 in. L x 38 in. W
Maximum mattress thickness for upper bunk: 6 in.
Upper bunk weight capacity: 350 lbs
Lower bunk weight capacity: 550 lbs
Desk weight capacity: 50 lbs
Estimated assembly time: 1-2 hours
Recommended assembly: 2 adults

Electrical Safety

For indoor use only.
Keep the power outlet and LED strip away from water, moisture, and heat sources.
Do not use the electrical components if the cord or plug is damaged.
Do not exceed the rated capacity of the power outlet module.
Route cords away from the ladder, mattress area, drawers, and walking paths.
Do not plug in the power outlet or LED strip until assembly is complete.

Bed Parts View

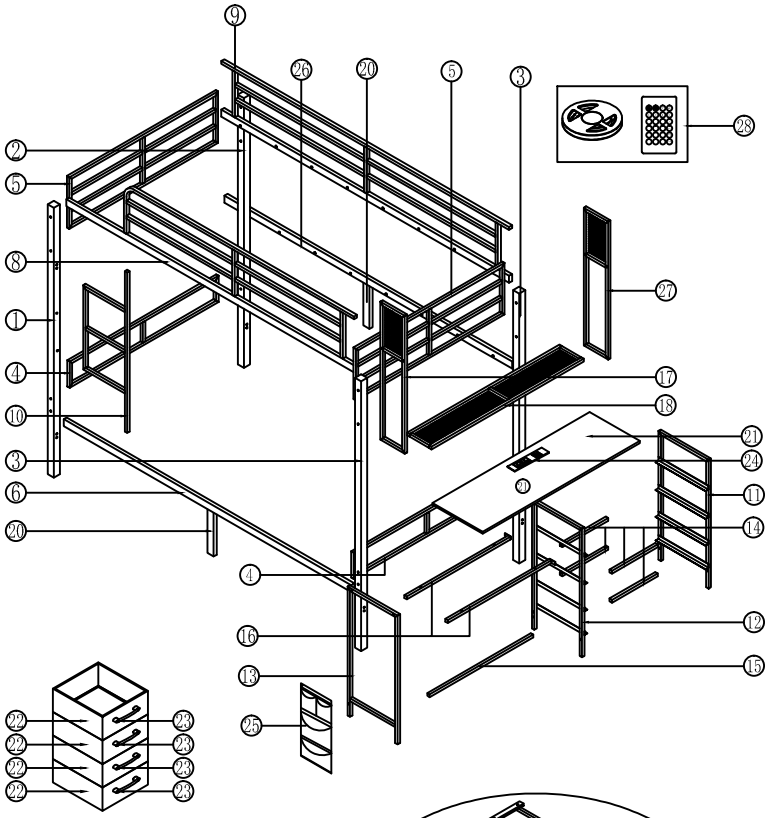

















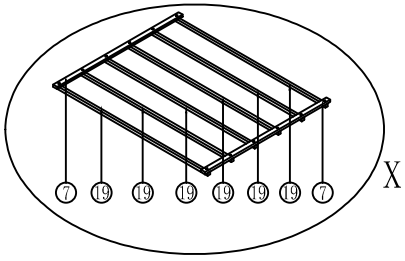


X 4



Recommended for assembly by 2 adults.

A power drill with a hex bit is recommended to speed up assembly, but do not overtighten the hardware.


Part List


 1-1PC	 2-1PC	 3-2PCS	 4-2PCS
 5-2PCS	 6-1PC	 7-8PCS	 8-1PC
 9-1PC	 10-1PC	 11-1PC	 12-1PC
 13-1PC	 14-4PCS	 15-1PC	 16-2PCS
 17-1PC	 18-1PC	 19-24PCS	 20-2PCS
 21-1PC	 22-4PCS	 23-4PCS	 24-1PC
25-1PC	 26-1PC	 27-1PC	 28-1PC

Hardware List


 A-6*19mm 48PCS	 B-6*25mm 4PCS	 C-6*38mm 54PCS	 D-6*50mm 22PCS
 E-6*67mm 25PCS	 F- 6*19 16PCS	 G 1pc	 H 1pc
 I-1PC	 J-1PC	 ϕ3.5*12mm L-2PCS	 M-4PCS
 N-1SET			


Step 1:Attach part #1、#2、#4 to part #5 using screws D and F .

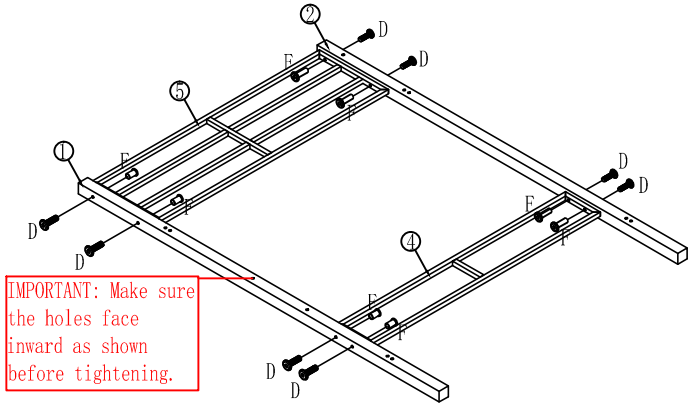

 1-1PC	 2-1PC	 4-1PC	 5-1PC
 6*50mm D-8PCS	 6*19mm F- 8PCS	 4mm G-1PC	 4mm H-1PC

Step 2:Attach part #3、#4 to part #5 using screws D and F .

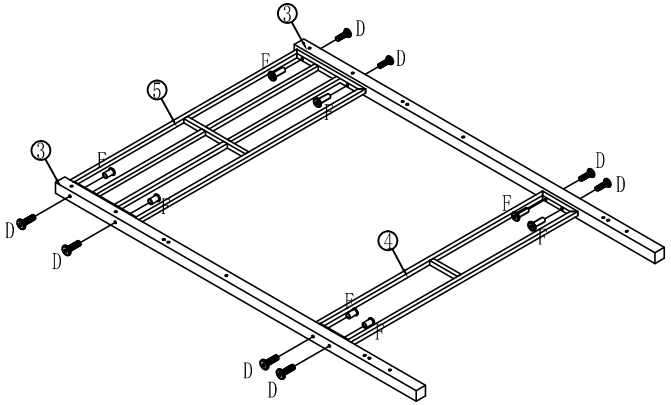



3-2PCS



4-1PC



5-1PC



6*50mm
D-8PCS



6*19mm
F- 8PCS





G-1PC



H-1PC

Step 3:Attach part #1、#2、#3 to part #9 using screws E .

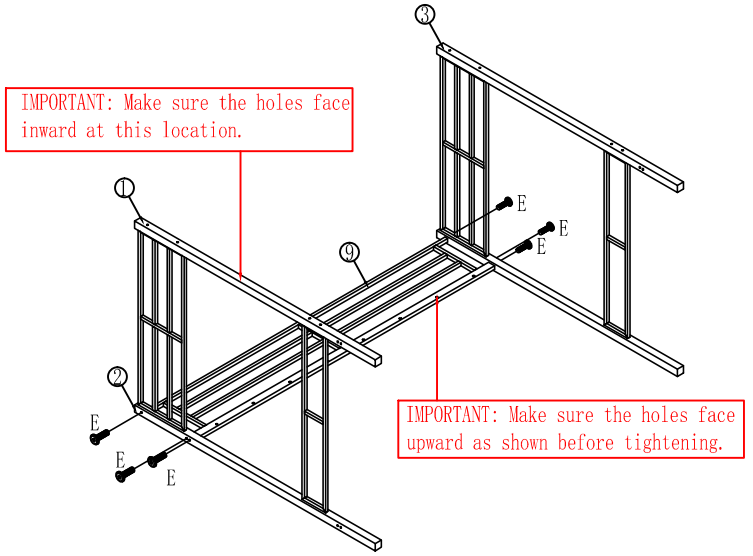



9-1PC




6*67mm
E-6PCS




G-1PC

Step 4:Attach part #8 using screws E

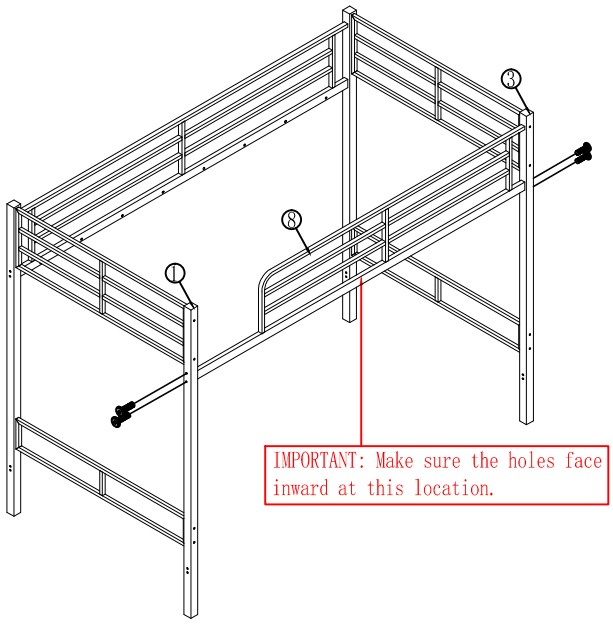

8-1PC	6*67mm E-5PCS	4mm G-1PC


Step 5:Attach part #26、#6 to part #20 using screws E .

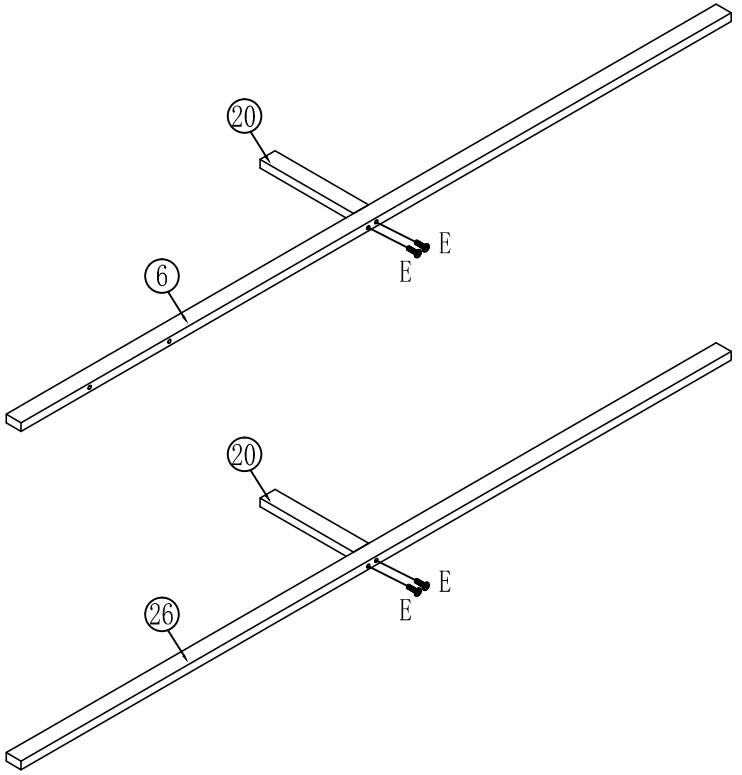

26-1PC


6-1PC	20-2PCS	6*67mm E-4PCS	4mm G-1PC


Step 6:Attach part #6、#26 to four bedposts using screws E .

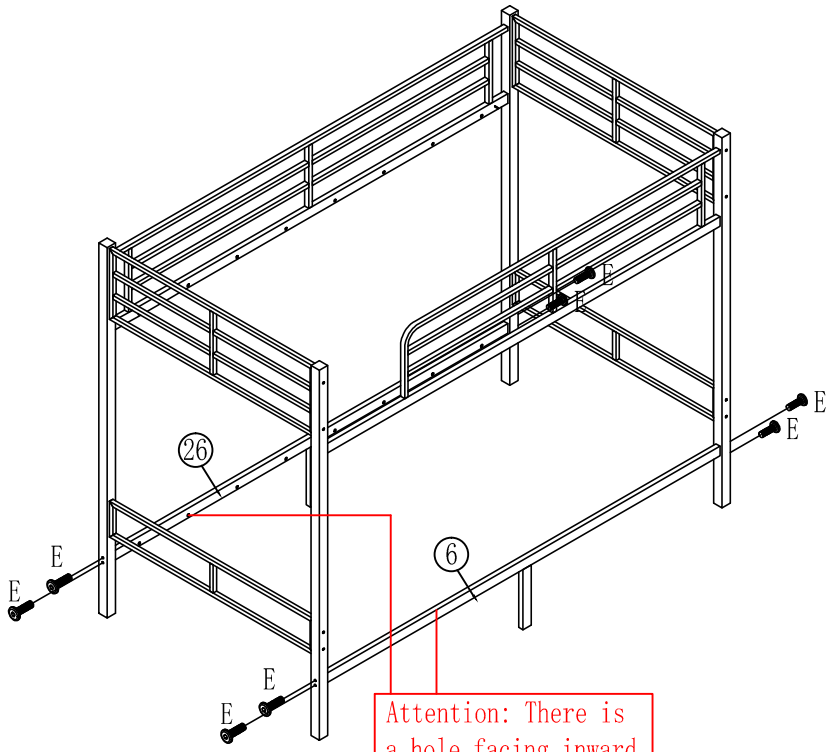


 6*67mm E-8PCS	 4mm G-1PC

Step 7:Attach part #10、#1、#6 to part #8 using screws C and E.

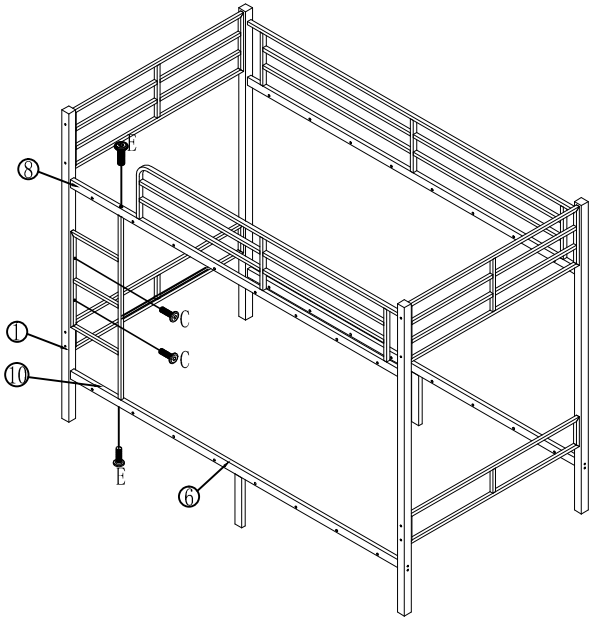


 10-1PC	 6*38mm C-2PCS	 6*67mm E-2PCS	 4mm G-1PC

Step 8:Attach four support bars (#14) to side frame (#11) using bolts C.

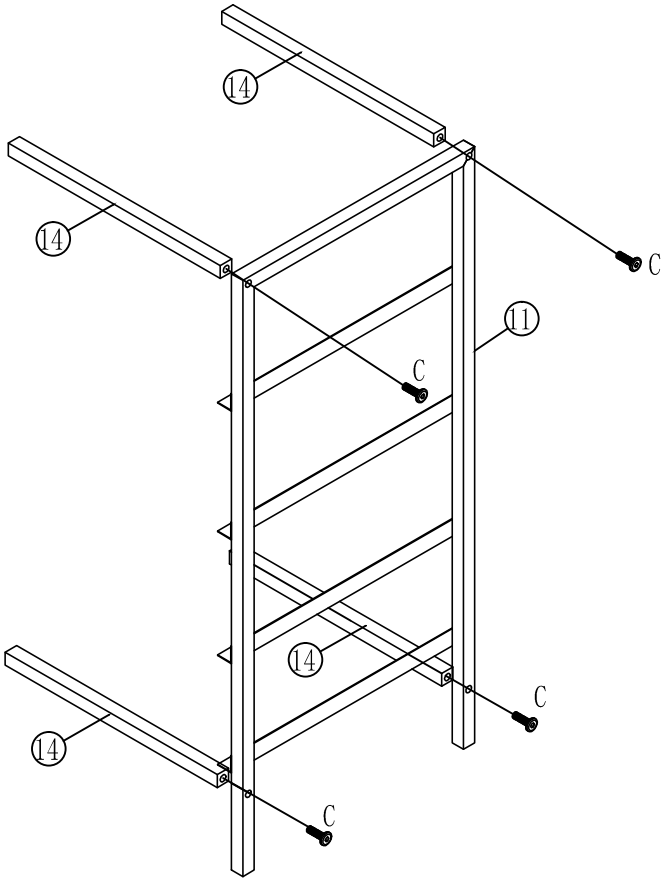


11-1PC	14-4PCS	6*38mm C-4PCS	4mm G-1PC

Step 9:Attach part #12 to part #16 using screws C .

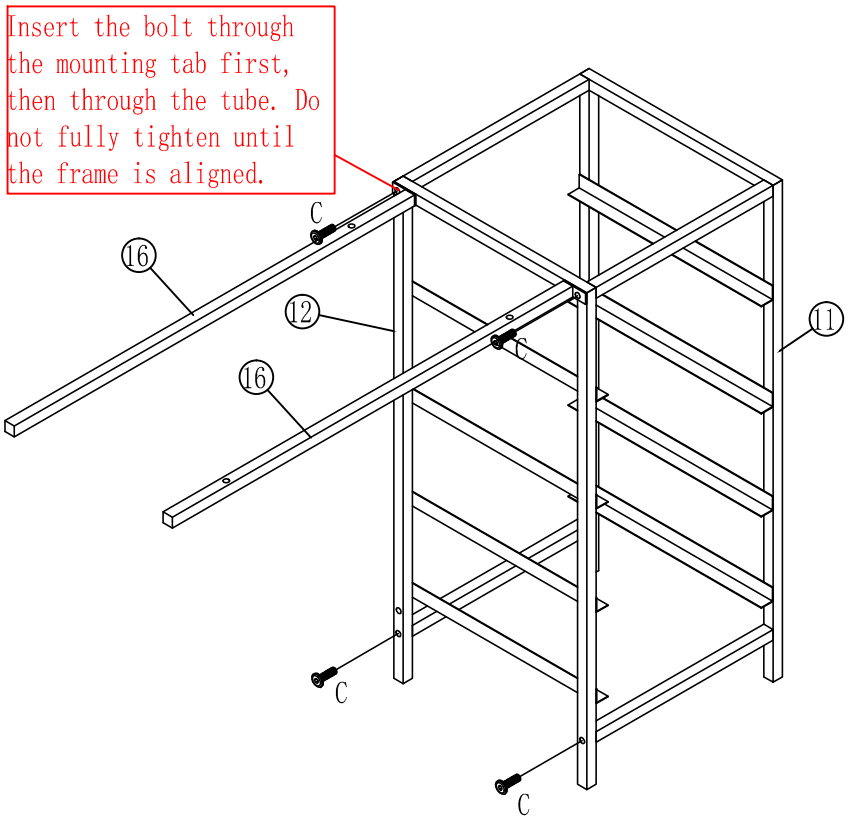


12-1PC	16-2PCS	6*38mm C-4PCS	4mm G-1PC

Step 10:Attach part #15 using screws C .

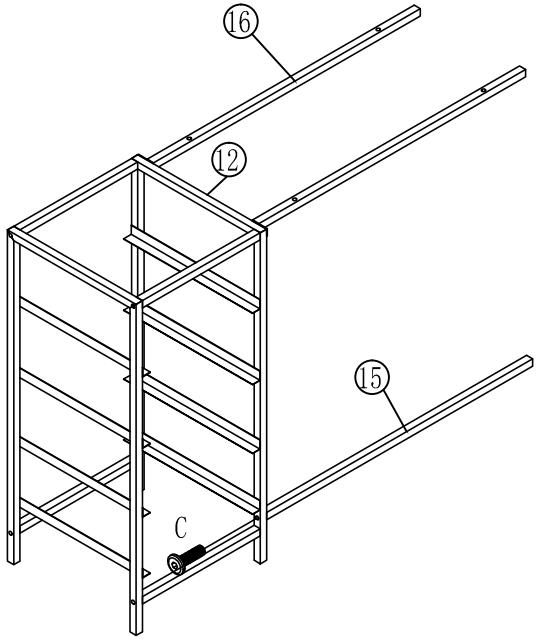


			
15-1PC	6*38mm C-1PC	4mm G-1PC	


Step 11:Attach part #13 to part #25 using screws C .

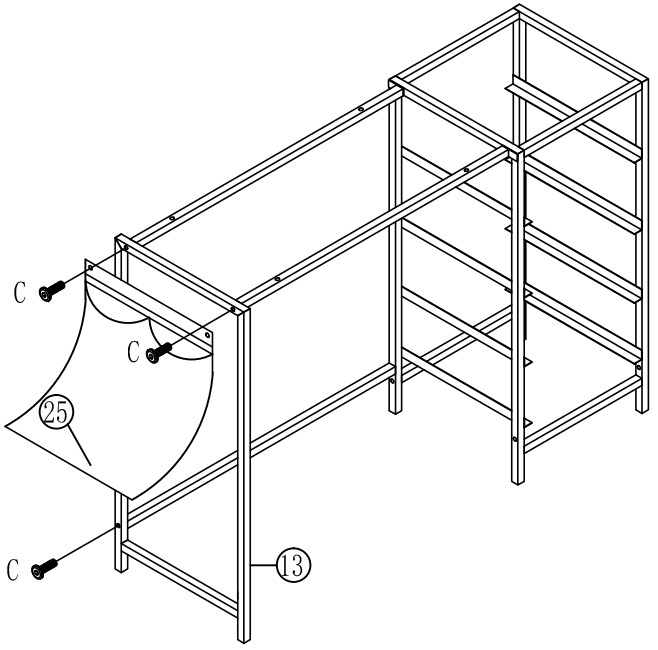

				
13-1PC	25-1PC	6*38mm C-3PCS	4mm G-1PC	

Step 12:Attached desktop panel (#21) to side frames (#13) using bolts B

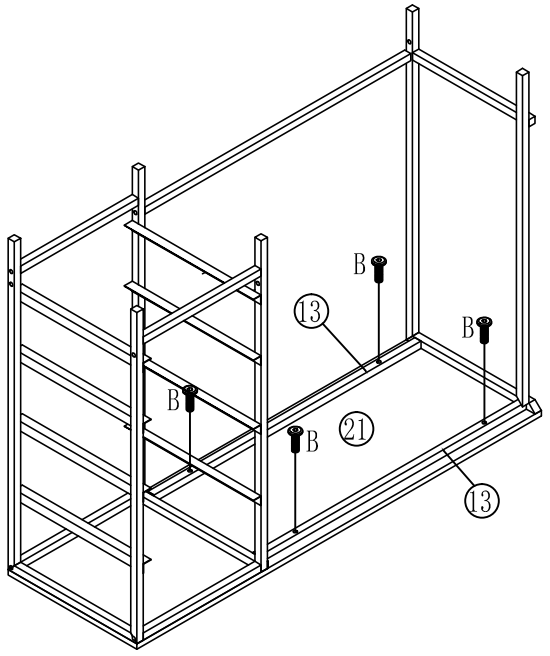



21-1PC




6*25mm
B-4PCS



G-1PC

Page 17

Step 13:Attach panels #17 and #27 to desk back rail #18 using bolts C. Do not fully tighten until all desk parts are aligned.

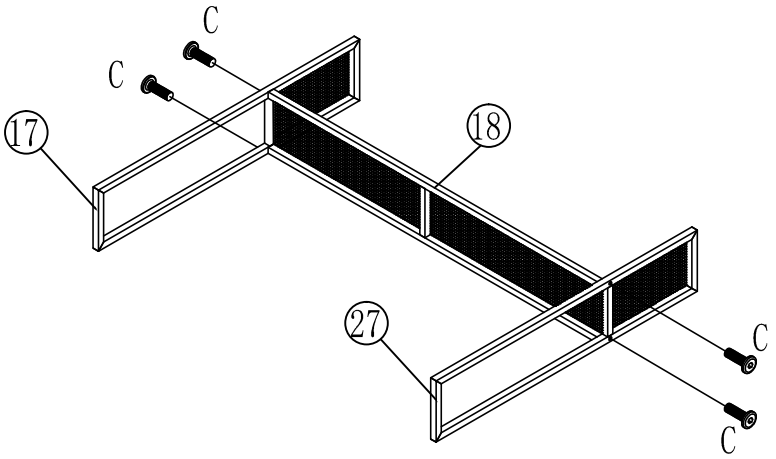



17-1PCS



27-1PCS



18-1PC




6*38mm
C-4PCS



G-1PC


Page 18

Step 14:Attach desktop panel(#21) to side panel (#27) usingbolts C.
Do not fully tighten until the desk frame isaligned with the bed frame.

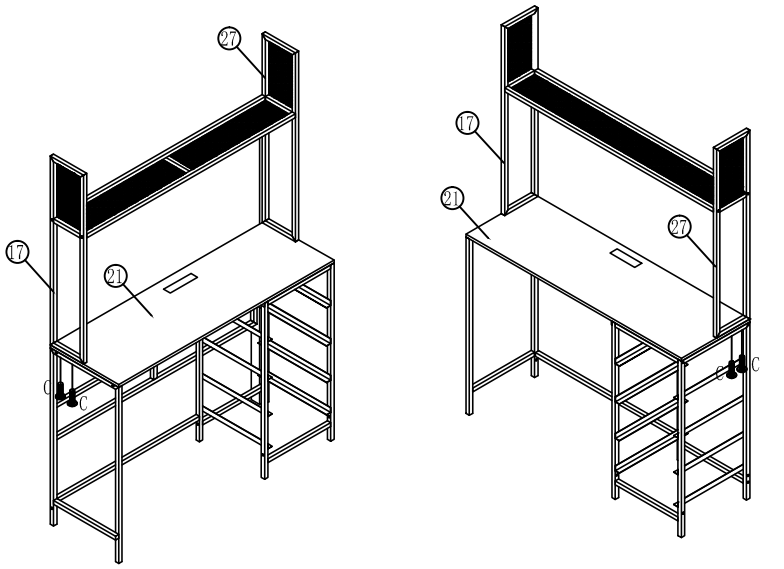


6*38mm C-4PCS	4mm G-1PC		

Step 15:Attach part #17, #27 to part #3 using screws D .
Do not fully tighten the screws until the desk frame and bed frame are fully aligned.

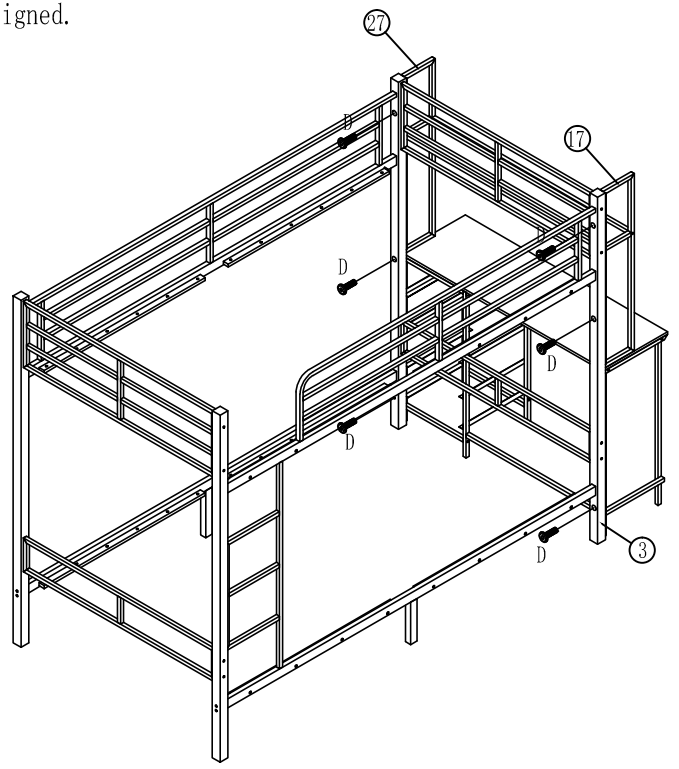


6*50mm D-6PCS	4mm G-1PC		


Step 16: Build four identical slat assemblies. Each slat assembly uses two Parts #7 and six Parts #19. Secure them with Bolts A using Allen Key G. After assembly, flip each slat assembly over for installation.

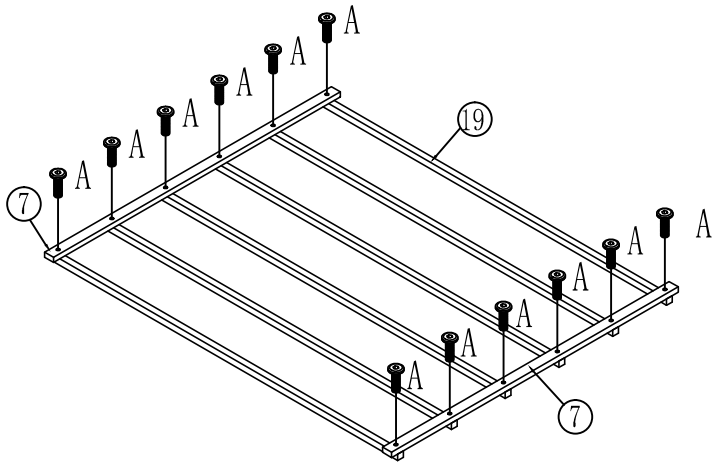


X 4


Step 17:Install the four slat assemblies onto the upper and lower bed frames using bolts C. Install the upper bunk slats first, then the lower bunk slats.

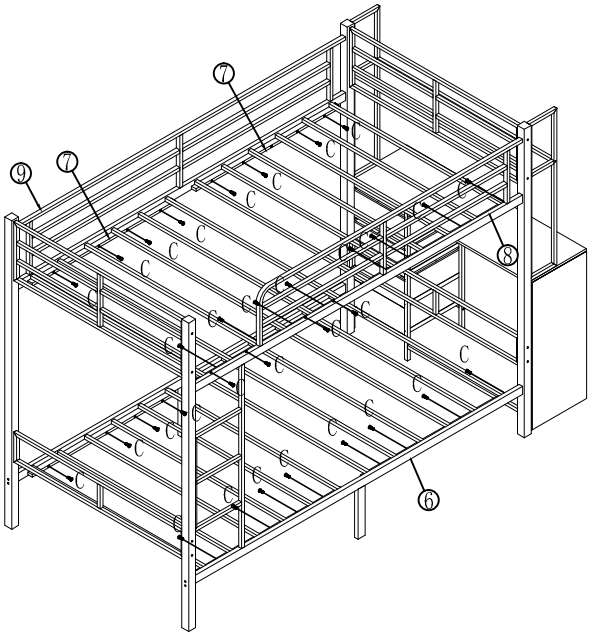



					
7-8PCS	19-24PCS	6*19mm A-48PCS	4mm G-1PC	6*38mm C-32PCS	4mm G-1PC

Step 18: Assemble four drawer boxes as shown. Make sure each panel is aligned before tightening the screws. Repeat this step to build four drawers.

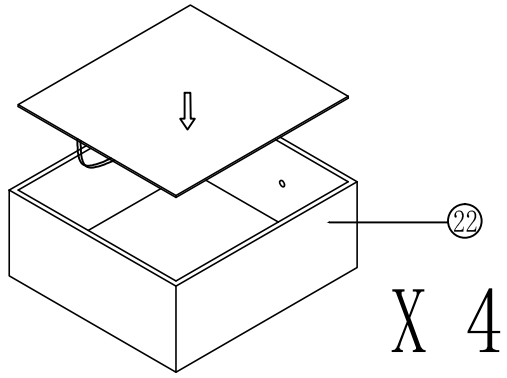

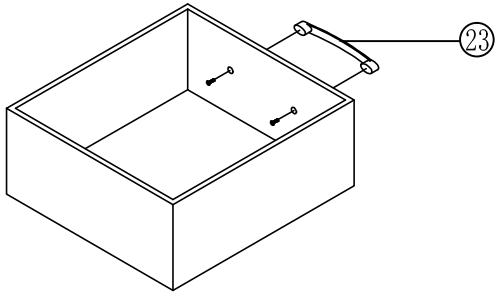



22-4PCS


23-4PCS

Electrical Safety Notice

This product includes electrical components.
For indoor use only.
Keep all electrical components away from water, moisture, and heat sources.
Do not use the electrical component if the cord or plug is damaged.
Do not exceed the rated capacity of the power outlet module.
Disconnect power before moving, adjusting, or servicing the bed.
Route all cords along the frame and keep them away from the ladder, mattress area, drawers, and walking paths.
Do not allow cords to be pinched by the bed frame, drawers, or mattress.

Step 19:Attach the power outlet module (#24) to the desktop using screws L. Make sure the module is firmly secured. Route the cord away from the ladder, mattress area, drawers, and walking paths. Do not plug in the power outlet until assembly is complete.

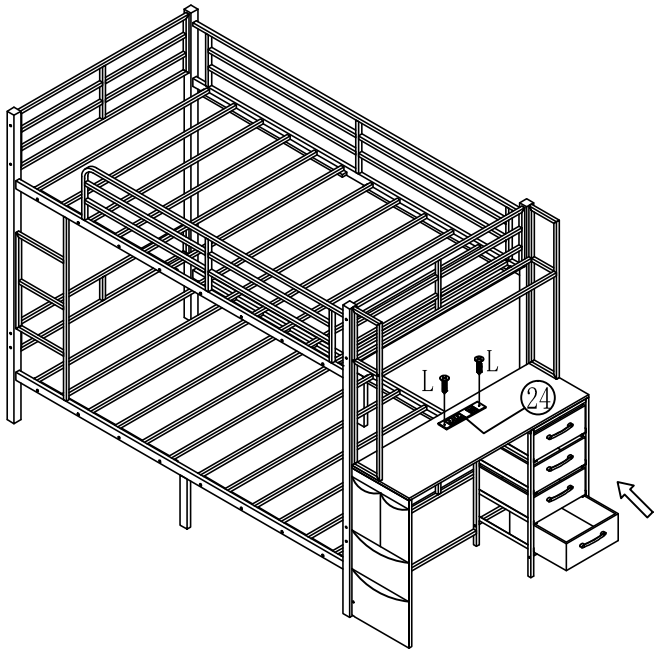



24-1PC




ϕ3.5*12mm

L-2PCS

Page 25

Step 20: Peel off the backing from the LED light strip and attach it to the bottom of Part #5 as shown. Clean and dry the surface before attaching. Route the cord along the frame and keep it away from the ladder, mattress area, walking areas, and any place where it may be stepped on or pinched. Do not power on the LED light until installation is complete.

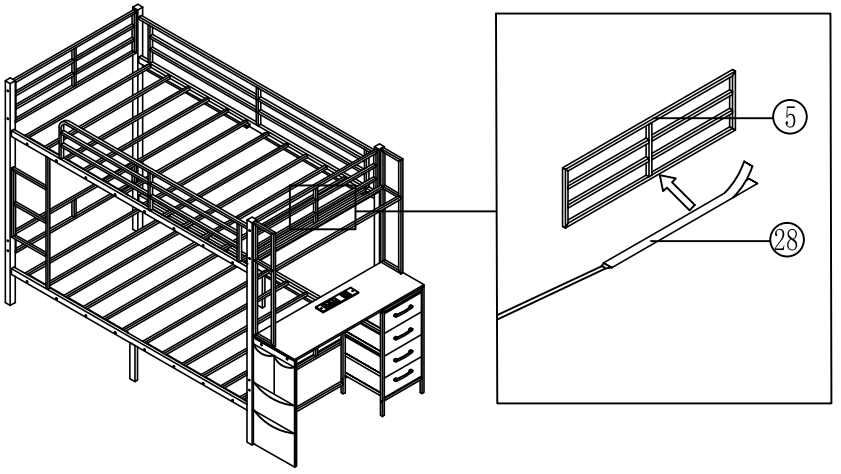




28-1PC

Notice:

Please kindly prepare and install button batteries for the remote control by yourself before use.

Page 26

Step 21: Secure the Bed to the Wall - Required Before Use.
This bed must be anchored to the wall before use.
Secure the bed to the wall using the included anti-tip hardware before use. For best results, attach the anti-tip brackets to wall studs when possible. If mounting to drywall, masonry, or another wall type, use anchors suitable for that wall material.

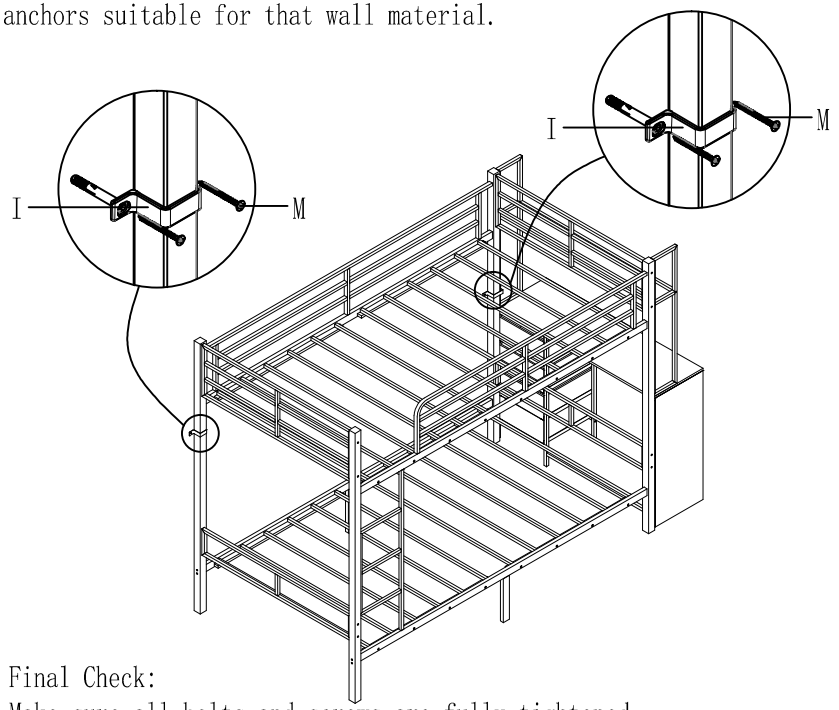

Final Check:
Make sure all bolts and screws are fully tightened.
Confirm the ladder is securely attached.
Confirm the bed is secured to the wall with the anti-tip hardware.
Confirm all slat panels are fully secured.
Confirm the desk, drawers, LED strip, and power outlet are securely installed.
Place the correct mattress on each bed frame before use.