
INSTALLATION MANUAL

LED BATHROOM MIRROR


ABOUT US

Thank you for shopping with us! We hope that our products have added a touch of brightness to your life. If you need any assistance, please don't hesitate to reach out. Our dedicated team is available 24/7 to ensure your satisfaction.

ACCESSORIES LIST

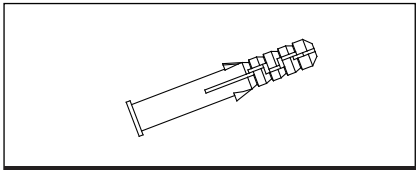


Wall Anchor-A

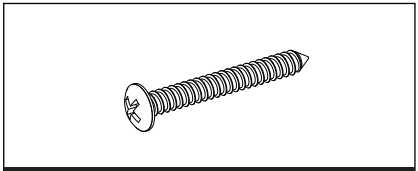


Short Screw


TOOLS REQUIRED




Level Ruler




Marker




Hammer




Tape Measure



Electric Drill



Phillips Screwdriver



Safety Goggles

BEFORE INSTALLATION

To ensure the best experience, **please read carefully and follow the instructions provided below before assembling and installing the product.**

1. Important Safety Instructions:

- Assemble the product by two or more adults to ensure proper installation.
- To connect the wires to electrical junction box, consultation with a qualified technician or electrician is highly recommended.
- Disconnect power before installing, adding, or changing any components.
- Make sure that the fixing location can support the weight of the entire fixture (e.g. solid stone or brick walls).
- To prevent injury, the mirror must be installed according to the instructions provided.

2. Pre-assembly:

- Inspect the product immediately upon receipt for any transit damage or missing parts.
- The voltage for your product should be between 100V and 120V. If the voltage exceeds 120V, please use a transformer.
- Please do not remove the plastic corner guards and transparent film on the mirror until the installation is finished.

3. Before Installation:

- Please check and make sure that the mirror is functioning properly.

• Power Check

After powering on, the backlight of two buttons will activate automatically.

• Anti-fog

(1) Defogging Function

The anti-fog function helps resist the troubling fog and keep a clear reflection image. To save energy, it will automatically turn off after one hour.

(2) Bluetooth Clock Function (24-Hour System)

Bluetooth Clock Display Activation: Press both buttons simultaneously to activate the Bluetooth clock display function. Once activated, adjust the settings following the instructions below.

Method 1: Bluetooth Automatic Time Calibration

Enable Bluetooth on your mobile phone and search for "Smart Clock" to pair. The time will be automatically calibrated once the pairing is successful.

Method 2: Manual Time Adjustment

(1) Minute Adjustment:

- Press and hold the Defog Button for 3 seconds to enter the minute adjustment mode. The minute display will flash.
- Press the Power Button once to increase the value; press and hold it for rapid adjustment.

(2) Hour Adjustment:

- Press and hold the Defog Button for 3 seconds to first enter the minute adjustment mode.
- If minute adjustment is complete or not needed, briefly press the Defog Button to switch to the hour adjustment mode. The hour display will flash.
- Press the Power Button once to increase the value; press and hold it for rapid adjustment.
- Exit the clock settings by pressing the Defog Button again or waiting for 5 seconds of inactivity.

To Deactivate the Bluetooth Clock Display:

Press both buttons simultaneously to turn off the function.

Touch Switch

There are two editions of our LED bathroom mirrors: those with a single color temperature and those with three color temperatures.

- **If the mirror you purchased is three-color temperature edition, the touch switch works as follows:**

The button controls the light brightness and color temperature. Keep holding it and the brightness will change. You can adjust the color temperature as well: the first tap is white light, the second one is warm light, and the third one is natural light. If no button is pressed within 15 seconds, the next tap will turn off the light immediately.

- **If the mirror you purchased is single-color temperature edition, the touch switch works as follows:**

The button controls the light brightness. Keep holding it to adjust the brightness level.


Memory Function

Your current settings will be saved, and it will resume in the same settings when you turn it on again.


INSTRUCTIONS


1.Confirm the distance between the centers of the two hanging holes and mark them on the wall(①). And use an electric drill to punch holes at mark spots and then apply wall anchors A with a hammer(②).

①

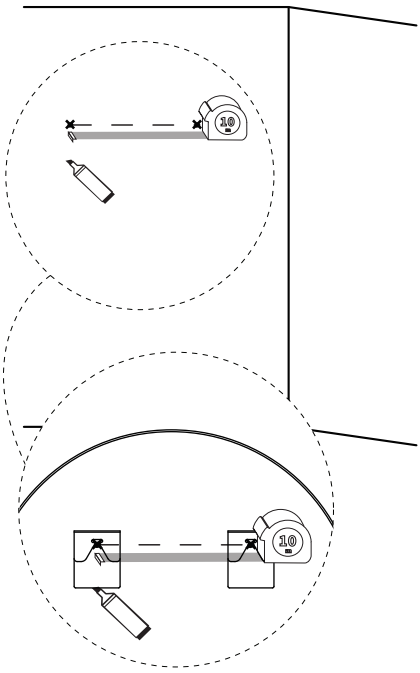


②

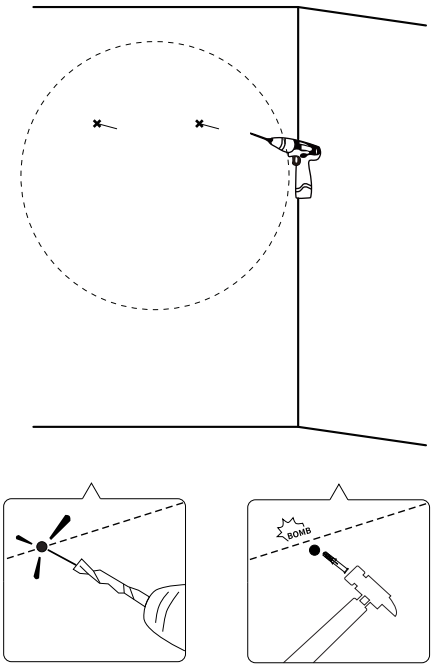

Thickness of Wall	Recommended Drill Bit
＞ 16mm	 1/4" (6mm) drill bit, drilling depth in 1 31/32" (50mm)
＜ 8mm	Unapplicable

Note: Please wear goggles and pay attention to safety.


2. Take the short screw and insert it into the wall - inserted rubber plug (the Wall-Anchor A). Make sure to leave a 7 - 14mm gap between the end of the screw and the wall surface. This will provide enough space for hanging the mirror securely.

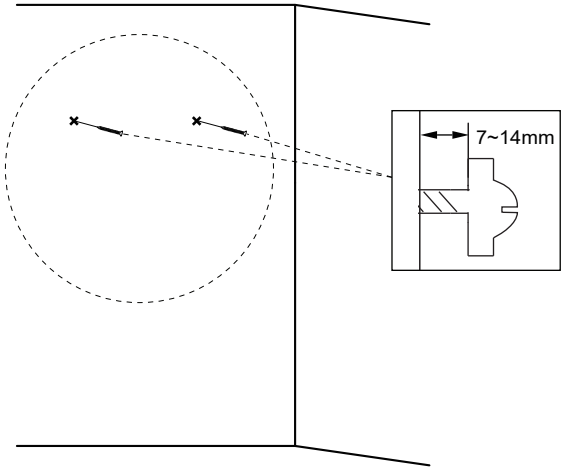

3. Connect the power by plugging into an outlet or hardwired to a standard circuit panel.

• Option 1: Plug-in

After hanging the mirror securely, plug the power cable to a standard socket.

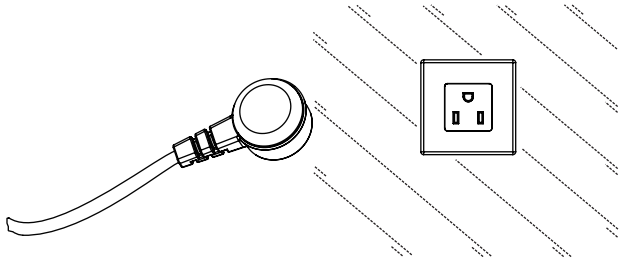


• Option 2: Hardwired

Cut the head off the plug and hardwire it into an outlet.

Black wire --- power supply L (LIVE)

White wire --- power supply N (NEUTRAL)

Green wire --- power supply E (EARTH)

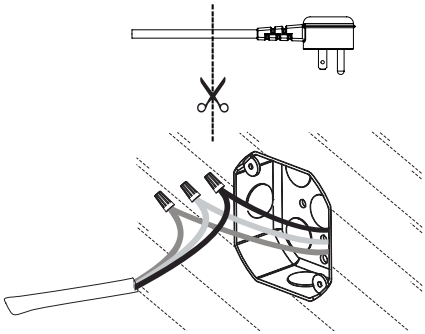

⚠ WARNING: This mirror must be earthed.

⚠ REMINDER: Please make sure the power is cut off before installation.

4. Place the mirror against the wall, align the hook with the mounted bracket, slowly lower the mirror down, and make sure that it slots into the right position and hangs securely.

