

INSTALLATION INSTRUCTIONS

For Wall Sconce Fixture

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Remove screws (I), rubber washers (J) and cap nuts (E) separating mounting plate (A) and parts (H, G, F).
4. Attach mounting plate (A) to the junction box with mounting screws (D) (size:8-32*1/2"L) provided.

Note: The side of the mounting plate marked "GND" must face out.

CONNECTION THE WIRES (Fig.2)

5. Connect the electrical wires as shown in Fig.2. Make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (C) provided. Tuck the wire connectors neatly into the junction box.

FINISHING THE INSTALLATION (Fig.1)

6. Thread the 2 mounting screws (B) into the mounting plate (A) spaced the same distance apart as the holes in the fixture back plate (F). (You can adjust the length of the screws if necessary.)
7. Align back plate (F) to screws (B) and secure with cap nuts (E).
8. Place the glass (G) with marked arrow on the topside into frame (H), then secure frame (H) to back plate (F) with rubber washer (J) and screws (I) onto back plate (F).
9. To prevent moisture from entering the junction box and causing a short circuit, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of frame (H) where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.3).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or back plate only.

Replacing LED module (Fig.4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.4)

Warning: Turn off power at the circuit breaker before replacing LED module.

- a. Loosen screws (I) and rubber washers (J) to remove frame (H) and glass (G). (Fig.1)
- b. To remove the fixture from the wall: loosen cap nuts (E). Disconnect the wire connectors and place the fixture (F) on a clear flat surface. (Fig.1)
- c. Loosen screws (K) and remove protective case (L) from back plate. Remove the waterproof silicon on the protective case (L), loosen screws (M) to remove cap (N) and diffuser (O).
- d. Loosen screws (S), rubber washers (R), screws (P) and wire fastener (Q). Carefully remove LED module (T).
- e. Reverse steps a-d for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

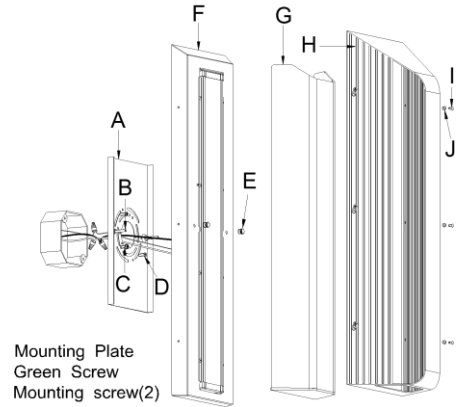


Fig. 2

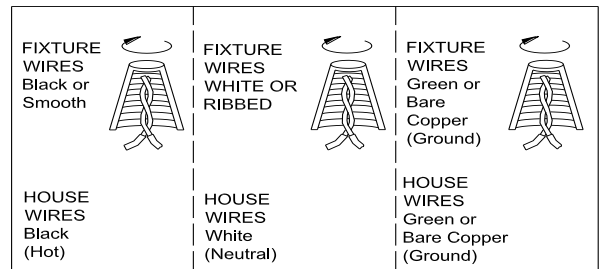


Fig.3




Fig.4

