


# Ceiling Light

## Installation Guide

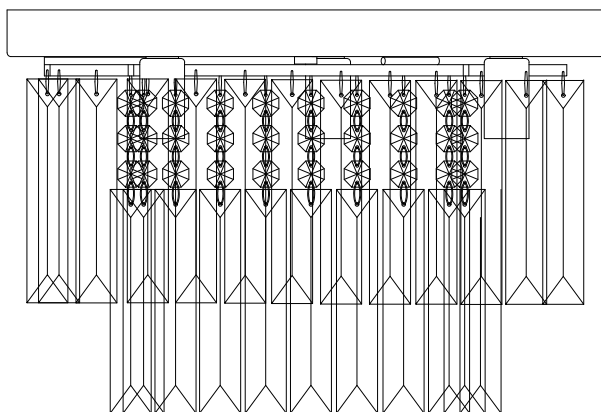

UK  
CA

CE




EN Indoor use only.

**IMPORTANT:** Installation must comply with current IEE Wiring Regulations and Building Regulations. Installation **must be** carried out by a qualified electrician.

## INSTALLATION INSTRUCTIONS

These instructions are provided for your safety. Please read carefully before commencing work and retain for future reference.

## SAFETY INFORMATION


- **Installation must be carried out by a qualified electrician.**
- This fitting should be fitted in accordance with current IEE Wiring Regulations and Building Regulations.
- To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- This fitting is Class 1 (Earthed) =  and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully

## WIRING & MOUNTING


1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this product in place of an existing one, you may find that there are more than 3 sets of cables connected. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting. Before removing existing fitting, carefully note position of each set of cables
3. Remove the mounting bracket from the ceiling cup by removing the 4 screws located in the side.
4. Using the mounting bracket as a template, mark and drill fixing holes in the ceiling. Ensure the holes are drilled into a joist or other suitable mounting and not just into plaster.
5. Secure the mounting bracket to the surface using suitable fixings for the type of material.
6. The weight of the fitting must be supported whilst making the electrical connections as follows:

### Household circuit

### Fitting wire

Blue or Black (Neutral) .....connect to.....Blue or wire marked "N"  
Red or Brown Switched Live.....connect to..... Brown or Red wire marked "L"  
Green/Yellow sleeved copper (Earth) .....connect to..... Green/Yellow or wire marked "  "

Ensure that all connections are tight and no loose strands are left out of the connector. Snap the cover of the connector block closed ensuring the wires are not trapped. Wrap two layers of electrical insulation tape around the connector block and around the wiring 2cm each side of the connector block - (see Fig 2.)

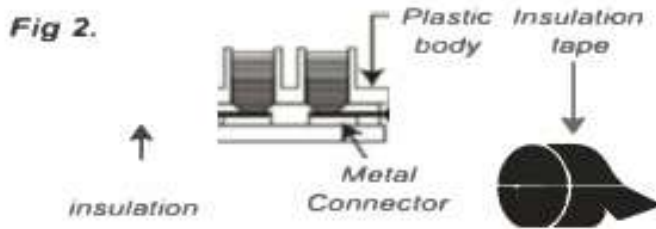

7. Offer fitting up to the mounting bracket and secure in place using the screws removed earlier. Take care not to damage wiring.

### **DRESSING THE FITTING**

To avoid damage crystals during dressing the fitting, please ensure there is protection on the floor below the light e.g. a blanket. Dress the fitting by referring to the diagram on the right page, starting from the bottom of the fitting and working upwards.

1. Attach dropper "B" to the inner metal ring of the fitting. Insert the metal clip through the hole on the metal ring, bend over the back of the clip to secure the crystal into place.
2. Attach dropper "A" to the outer metal ring of the fitting.

Fit the bulb: Type and wattage as indicated on the fitting. The wattage indicated must not be exceeded.

## Contents

1 x Light fitting including fixing bracket with side screws and lock washers.  
1 x Fixing pack containing 3-way connection block, 4 fixing screws, 4 plugs.  
Crystal content:






Figure 1

CRYSTAL CLIP FIXING  
(CRYSTALS MAY VARY)

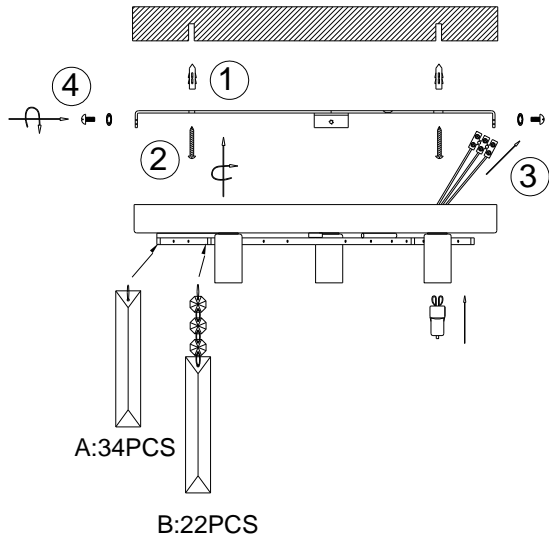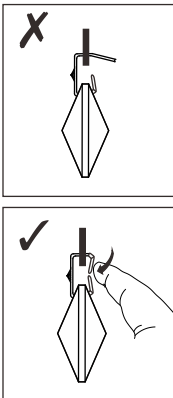

**G9 Bulb -  
Max 7W LED  
bulb not included**  
Indoor use only.

**CLEANING & CARE**

- Wipe clean with a soft dry cloth only
- Do NOT use chemical cleaners or any abrasive materials likely to damage the finish of the product.

# Installation Steps

## STEP 1

### TURN OFF POWER SUPPLY

Fix the metal bracket to the ceiling using screws and wall plugs. Use suitable fixings for the material type. Ensure no pipes, wires etc. are present before commencing drilling.

If you are fitting this product in place of an existing one, you may find that there are more than 3 sets of cables connected. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting. Before removing existing fitting, carefully note position of each set of cables

## STEP 2

Remove the decorative plate (canopy) from the fixture so you can access the wires inside.

## STEP 3


Ensure Power Supply Remains OFF

Match the wires from the ceiling to the fixture:

**Home Wire -----Fixture**

Blue/Black (N) → Neutral (N)

Red/Brown (L) → Live (L)

Green/Yellow (Earth) → Earth (  )

Use the provided connectors to join them securely.

Tuck the wires neatly inside the ceiling plate.

## **STEP 4**

Lift the fixture and secure it to the ceiling bracket with the screws provided or suitable fixtures for the material type.

## **STEP 5**

Clip the crystals onto the hooks as shown

(A = 34 pieces, B = 22 pieces).

Make sure each clip is fully closed so crystals don't fall.


## **STEP 6**

Turn Power Supply On


# Instruction of attaching droppers closed to lampholder

Notice: for 3 droppers closed to lampholder only!

1, Remove original clip from a crystal dropper "B".



2, Attach the crystal dropper to the clip attached on the metal ring. Insert the metal clip through the hole on the top of crystal, Bend over the back of the clip to secure the crystal into place.

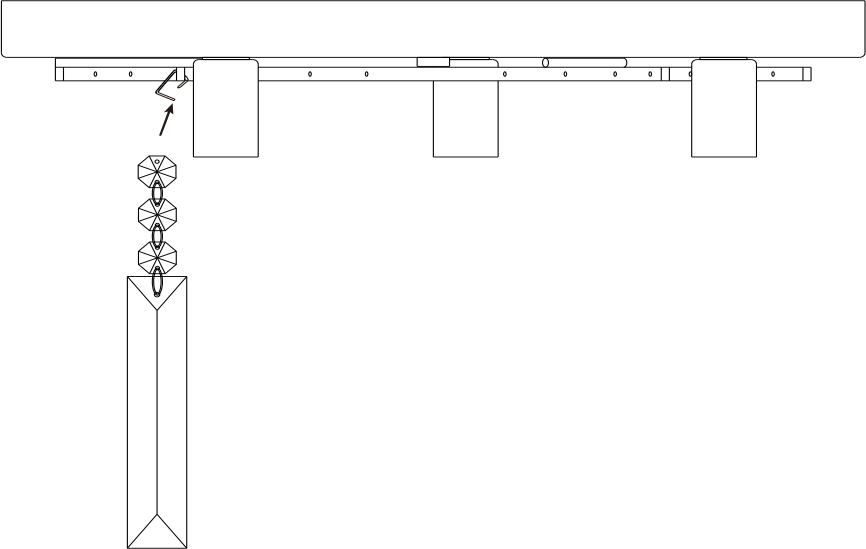



# our 1 year GUARANTEE

Our products come with a 1 year guarantee, giving you extra peace of mind when shopping with us

## *What the guarantee covers*



**PRE-INSERTED FIXINGS**



**FAULTY JOINTS**



**EXTERNAL FIXING FAULTS**



**STRUCTURAL INTEGRITY**

---