

# LED DISK LIGHT

1/14

LED-SM4DL



## TOOLS AND MATERIALS REQUIRED:




Phillips  
Screwdriver



Wire Cutters



Pliers




Wrench

Wiring supplies  
as required  
by your local  
Provincial or  
State Electrical  
Code

## SAFETY PRECAUTIONS:


1. **TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
2. **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
3. **CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

| PART | DESCRIPTION         | QTY |
|------|---------------------|-----|
| A    | LED disk light      | 1   |
| B    | Adaptor plate       | 2   |
| C    | Mounting screw      | 2   |
| D    | Wire nut            | 1   |
| E    | Adaptor plate screw | 2   |
| F    | Power connector     | 2   |

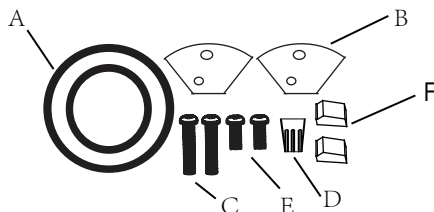

## FLUSH MOUNT

Max # of Lamps per 600W Dimmer: 6pcs

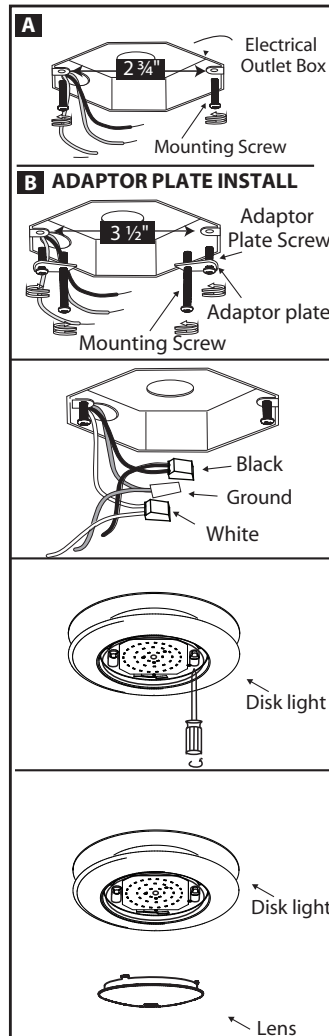

1. Prior to installation you will need to determine if the electrical box requires the adaptor plate. If the distance between the mounting screws in your electrical outlet box is greater than 2 3/4" you will need to use the adaptor plate. Securely tighten adaptor plate, with adaptor plate screws. Do not drive mounting screws completely to the end of the junction box.
2. Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector. Connect white to white, black to black, and copper wire to copper wire as grounding connection.
3. With the lens off of fixture, attach disk light to mounting screws, turn fixture clockwise to lock. Tighten screws to firmly hold the fixture in place.
4. Complete the installation by twisting the lens on the disk light.