


LED Dusk to Dawn
Area Light

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____







CCT
4000K



Non Dimming





CERTIFIED



WARRANTY
5
YEARS

Performance & Features

LED Source

- Single 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- Non Dimming
- 120-277V input voltage
- NEMA 3-Pin Photocell included
- Type V light distribution

Construction

- Highly durable die-cast aluminum housing
- Long-lasting gray finish available
- Wet location rated
- Operates efficiently in temperatures from -40°F to 122°F
- Wall Mount, Arm Mount (sold separately)

Certifications and Warranty

- UL Listed
- Backed by a 5-year limited warranty

SKU Guide

Example: L-ASTR75-PC-4K-GR

Family	Wattage	Control	CCT	Finish
ASTR	55 = 55W 75 = 75W	PC = Photocell	4K = 4000K	GR = Gray

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
L-ASTR55-PC-4K-GR	55W	7000	4000K	128	Gray
L-ASTR75-PC-4K-GR	75W	9000	4000K	120	Gray


Accessory




Mounting Arm

Dimensions

L-ASTR55-PC-4K-GR

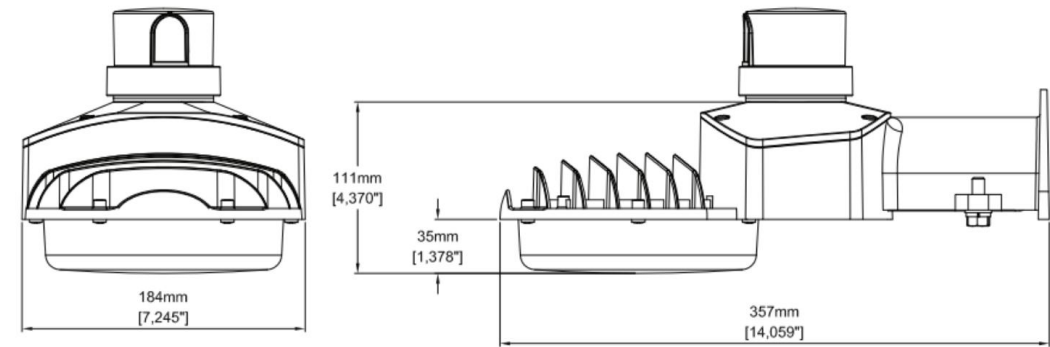

L-ASTR75-PC-4K-GR

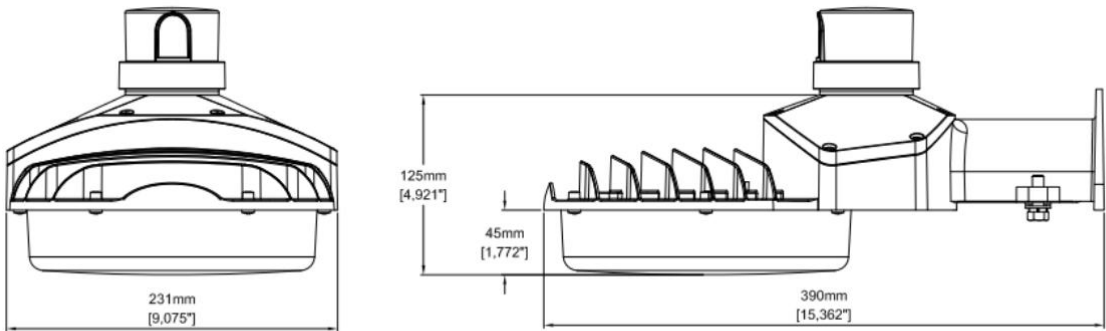


Packaging Dimensions

SKU#	Master Carton	Qty
L-ASTR55-PC-4K-GR	14.29 x 21.77 x 16.50-in.	4
L-ASTR75-PC-4K-GR	15.40 x 18.07 x 12.32-in.	2

Photometry

L-ASTR75-PC-4K-GR

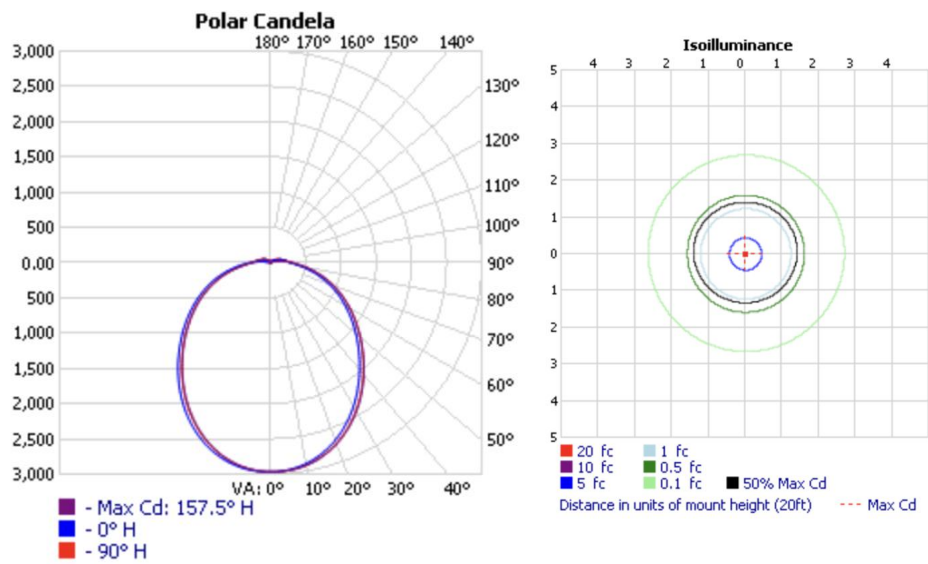

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	2,252.9	24.4%
0-40	3,630.3	39.4%
0-60	6,317.5	68.5%
60-90	2,308.1	25%
70-100	1,480.8	16.1%
90-120	490.1	5.3%
0-90	8,625.6	93.6%
90-180	591.2	6.4%
0-180	9,216.8	100%

Note: Additional Photometry available on request