



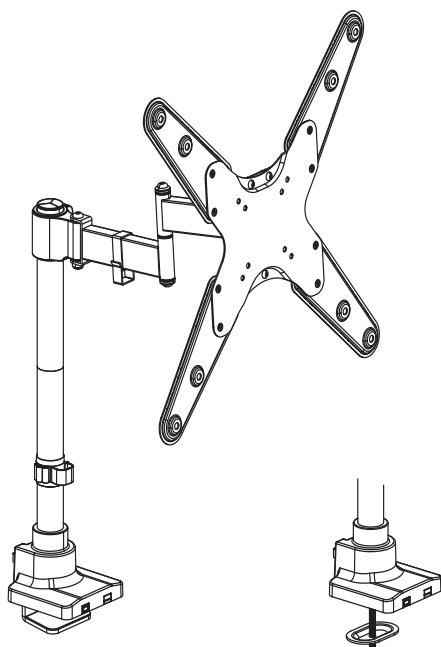

Articulating Arm Single TV Desk Mount

SKU: STAND-V155D
Instruction Manual

Assembly Video & Product Info
www.vivo-us.com/products/stand-v155d

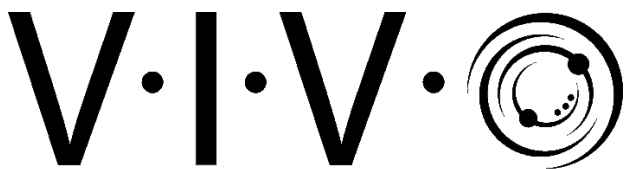



If you do not understand these directions, or if you have any doubts about the safety of the installation, please contact our product support team at 309-278-5303 or help@vivo-us.com for further assistance. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.



WARNING: CHOKING HAZARD

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.



DO NOT EXCEED WEIGHT CAPACITY

FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY.

We're Here for You

Open **Monday - Friday 7:00am - 7:00pm CST**, our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us. We are happy to replace parts to ensure you have a fully functioning product.



Give us a Call:
309-278-5303

AVG. RESOLUTION TIME (*within office hrs*): **5M 4S**



Chat Us:
www.vivo-us.com

AVG. RESOLUTION TIME (*within office hrs*): **< 15 M**



Email Us:
help@vivo-us.com

AVG. RESPONSE TIME (*within office hrs*): **1HR 8M**

- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr


Package Contents




A (x1)
Upper Pole




B (x1)
Lower Pole




C (x1)
Arm




D (x4)
VESA Adapters



E (x1)
Clamp



F (x1)
Grommet Plate



G (x1)
Pole Cable Clip



H (x1)
Arm Cable Clip




I (x1)
Clamp Cable
Clip

Included Hardware & Tools




S-A (x8)
M6x8mm Screw



S-B (x1)
M8x160mm Screw



M-A (x4)
M4x12mm Screw




M-B (x4)
M5x12mm Screw




M-C (x4)
M6x14mm Screw



M-D (x4)
M8x16mm Screw



M-E (x4)
M6x30mm Screw



M-F (x4)
M8x35mm Screw



M-G (x4)
M5 Washer



M-H (x4)
M8 Washer



M-I (x4)
Small Spacer



M-J (x4)
Large Spacer



T-A (x1)
3mm Allen Wrench



T-B (x1)
4mm Allen Wrench



T-C (x1)
6mm Allen Wrench



T-D (x1)
Wrench

Tools Needed:



**Phillips
Screwdriver**

Weight Capacity:




**44lbs
(20kg)**

ASSEMBLY STEPS

STEP 1


Assembly Option #1: Desk Clamp

Using the 6mm Allen Wrench (**T-C**), loosen the **Screw** located inside the Clamp (**E**), lowering the **Clamp Bracket**, creating a space larger than the thickness of your desktop.

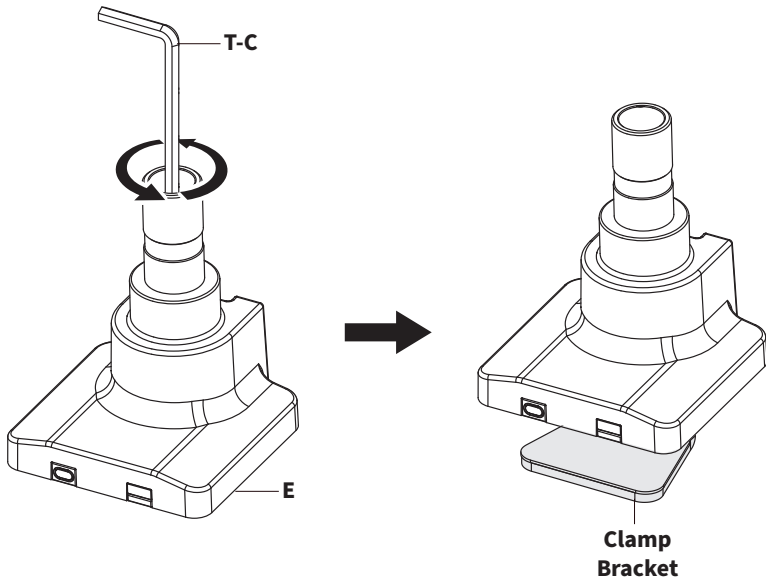


Slide the Clamp (**E**) onto your desktop in your desired position. Secure the Clamp in place using the 6mm Allen Wrench (**T-C**).

Proceed to Step 2

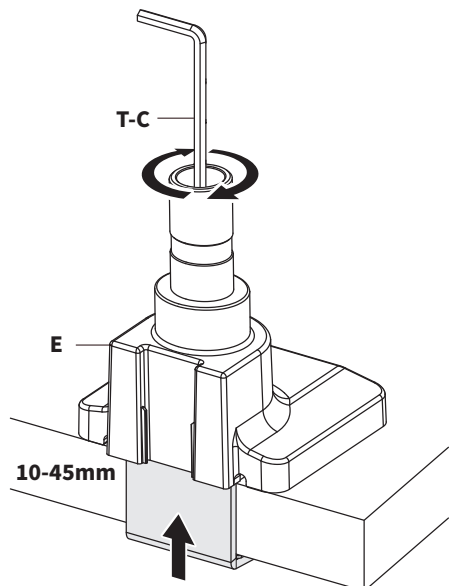

Assembly Option #2: Grommet Installation

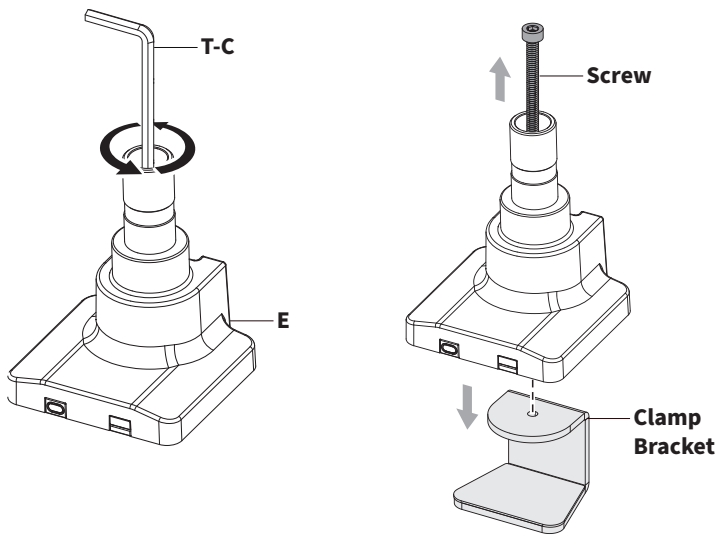


Use 6mm Allen Wrench (**T-C**) to remove the **Screw** and **Clamp Bracket** located inside the Clamp (**E**).

Both pieces can be discarded and will not be used in the remainder of the assembly.

Install Clamp (**E**) to your desktop using the Grommet Bolt (**S-B**), Grommet Plate (**F**), and 6mm Allen Wrench (**T-C**).

Proceed to Step 2

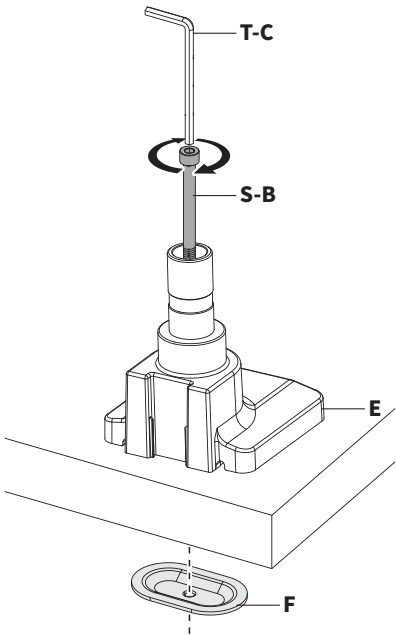







Don't Have a Grommet Hole?

If you do not have an existing hole for installation, drill a hole through your desktop in your desired mounting location using a ½" (10mm) drill bit.

STEP 2



Insert Lower Pole (**B**) onto the **Post** on Clamp (**E**), ensuring the **Threaded End** is on the top. Tighten the lower set screw using 3mm Allen Wrench (**T-A**).

Slide Pole Cable Clip (**G**) onto Lower Pole (**B**) and screw Upper Pole (**A**) into Lower Pole (**B**). Tighten the top set screw using 3mm Allen Wrench (**T-A**).

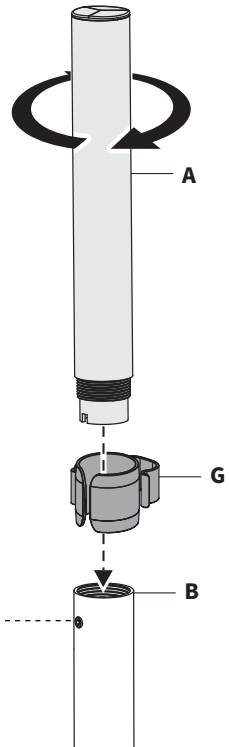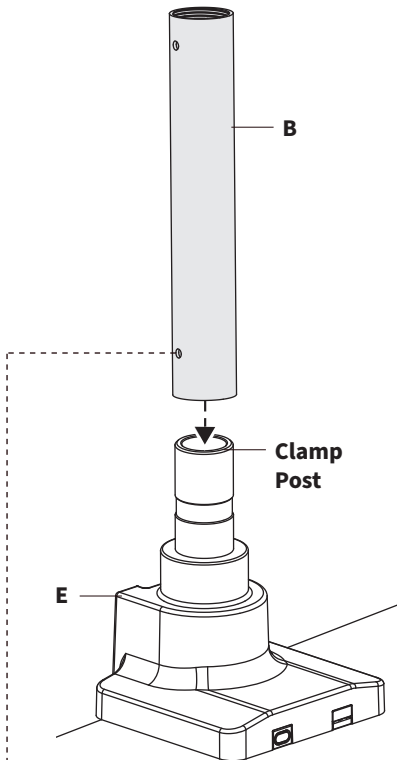


STEP 3

Use the Wrench (**T-D**) to remove the screws and nuts on the back of Arm (**C**) to remove the VESA Plate (**C1**). Set aside for use in a future step.

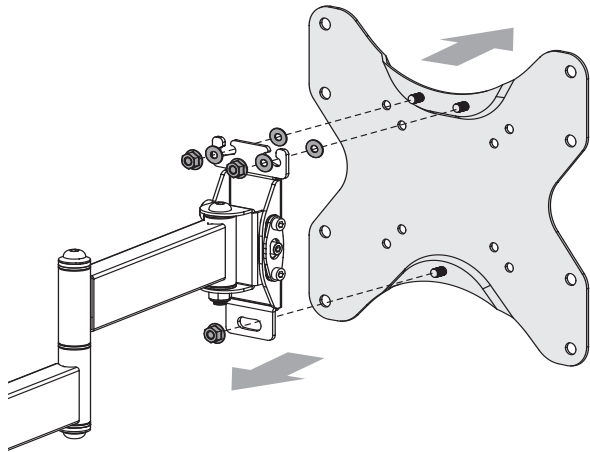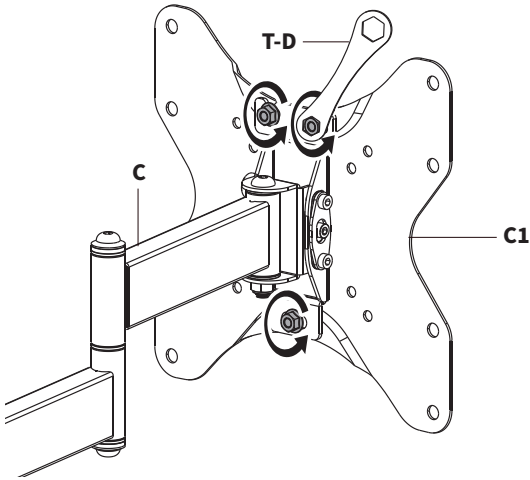

STEP 4


Slide Arm **(C)** onto Upper Pole **(A)** and secure using 6mm Allen Wrench **(T-C)** at desired height. Place Arm Cable Clip **(H)** onto Arm **(C)**.

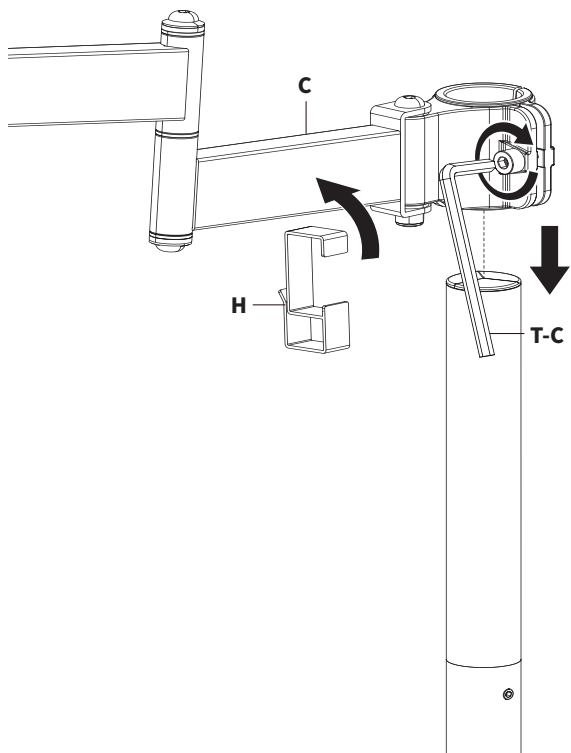


STEP 5

VESA Plate Assembly Choose Option to Match VESA Pattern


VESA Adapters can be assembled to VESA Plate in three different variations. Select the setup that matches your screen's VESA pattern **on the next page**.




VESA Plate Assembly #1
300mm x 300mm & 400mm x 400mm

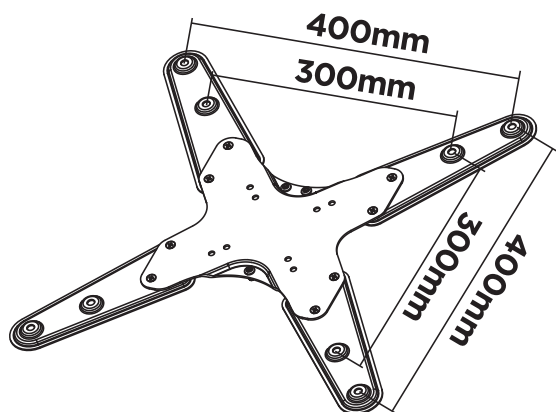


Secure VESA Adapter Set (**D**) to front of VESA Plate (**C1**) using M6x8mm Screws (**S-A**) in the configuration shown below.

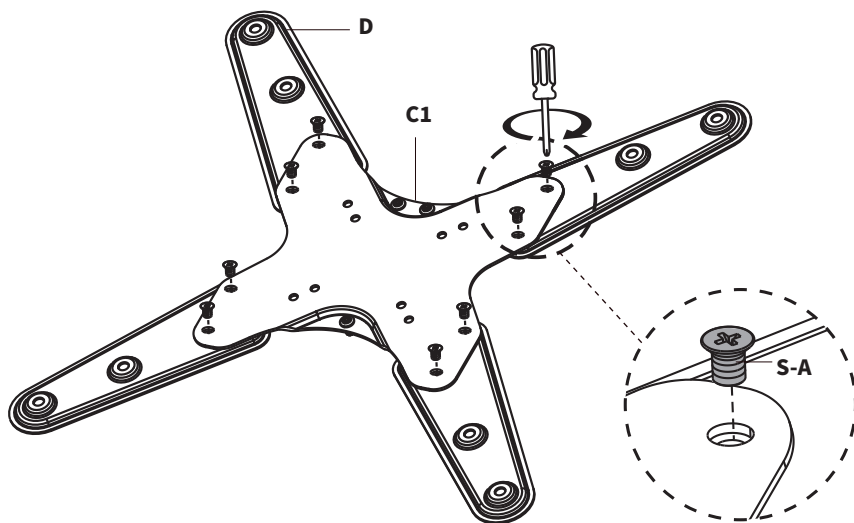


VESA Plate Assembly #2 400mm x 200mm

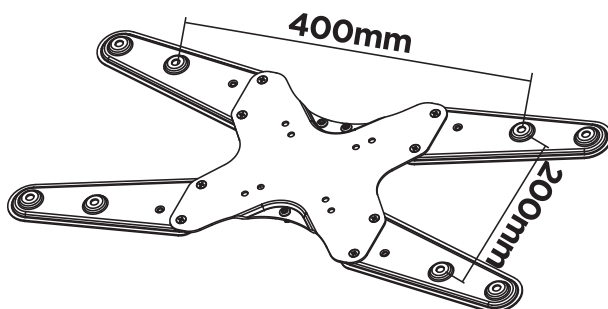


Secure VESA Adapter Set (**D**) to front of VESA Plate (**C1**) using M6x8mm Screws (**S-A**) in the configuration shown below.

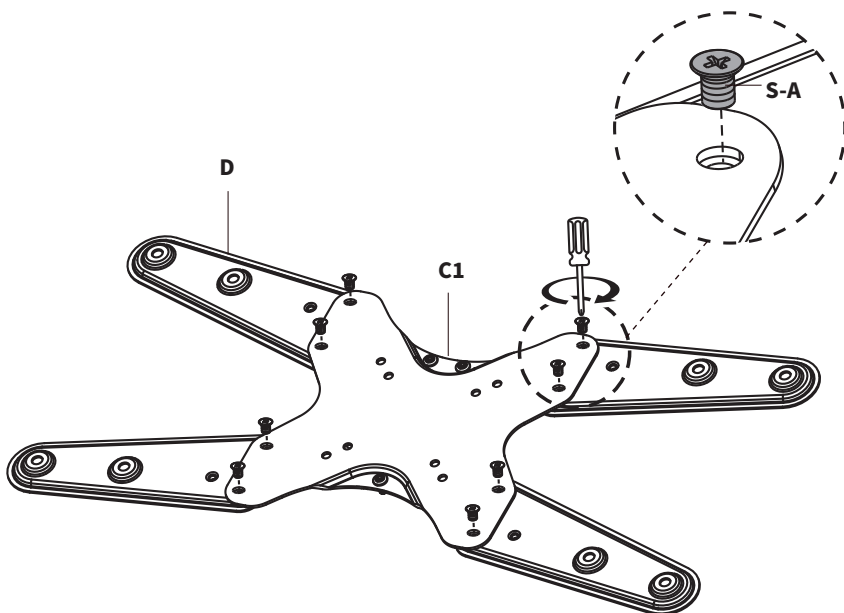

VESA Plate Assembly #3
400mm x 300mm


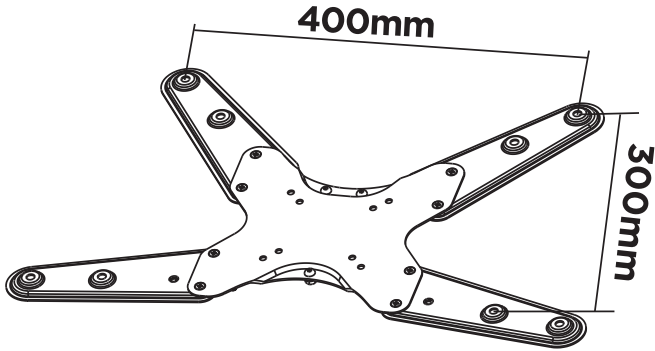


Secure VESA Adapter Set (**D**) to front of VESA Plate (**C1**) using M6x8mm Screws (**S-A**) in the configuration shown below.

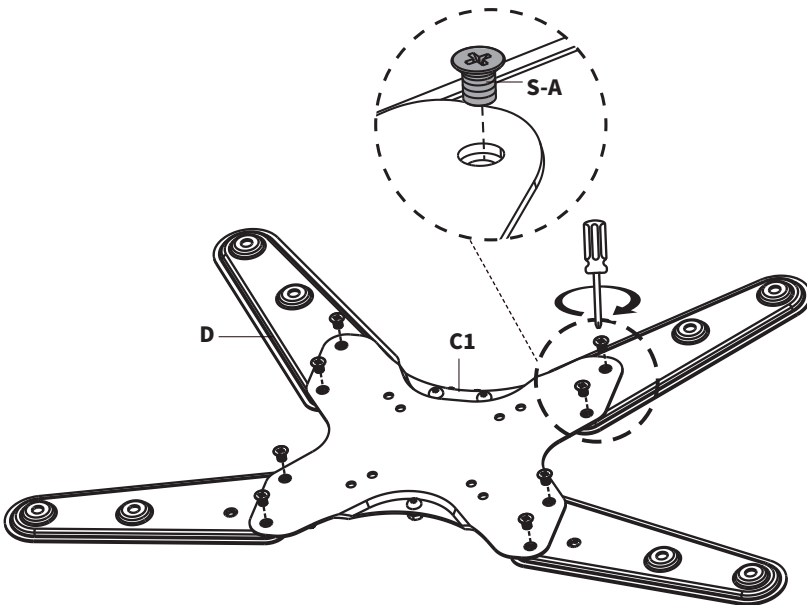


STEP 6

Secure VESA assembly to the back of your screen using appropriate Screws (**M-A thru M-F**), Washers (**M-G, M-H**), and Spacers (**M-I, M-J**) using a Phillips screwdriver.

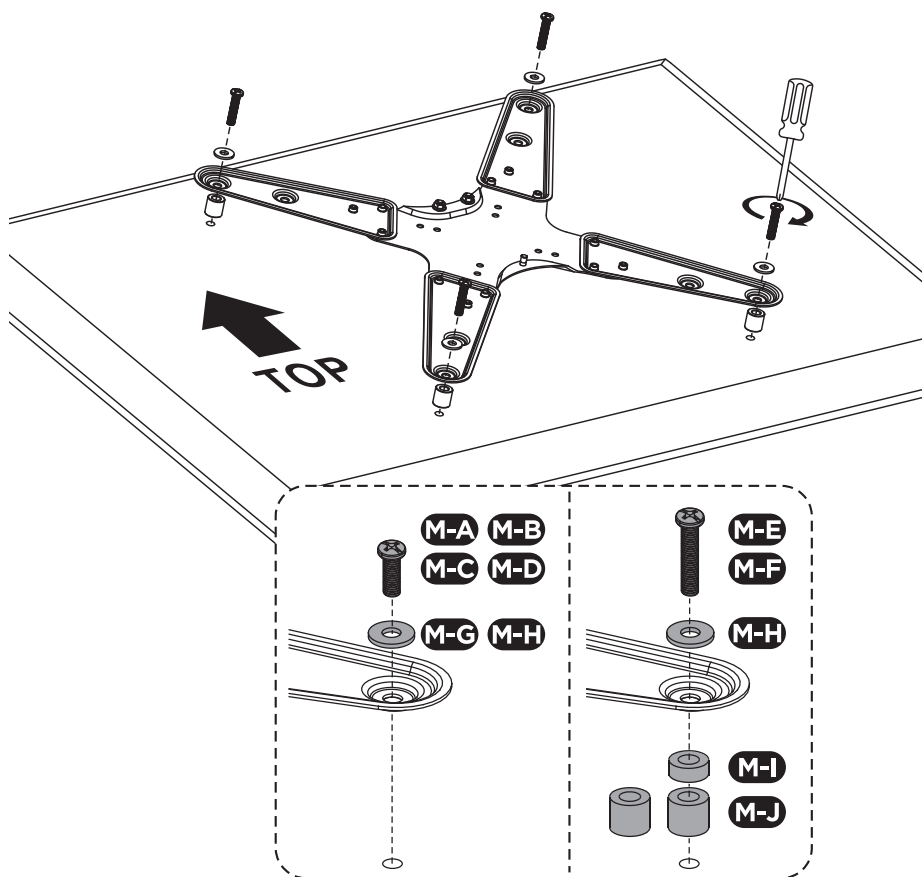



STEP 7

Secure VESA assembly to the Arm **(C)** using the previously removed screws and nuts. Tighten using Wrench **(T-D)**.

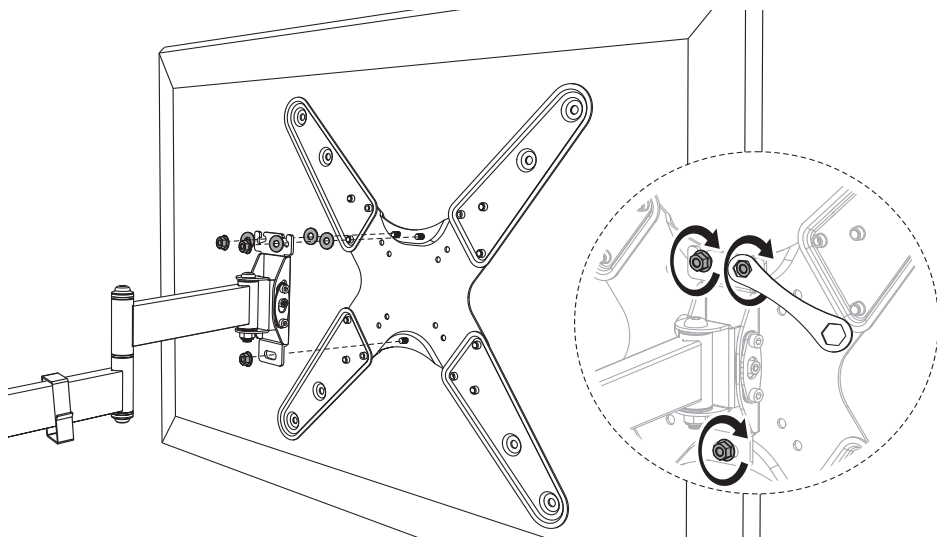

Adjust as Desired

Use 4mm Allen Wrench (**T-B**) adjust tilt.

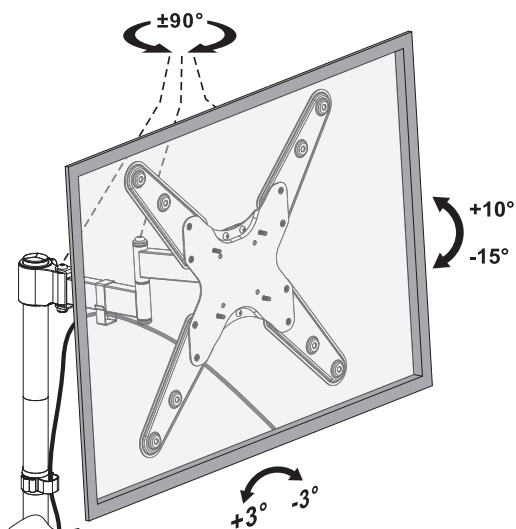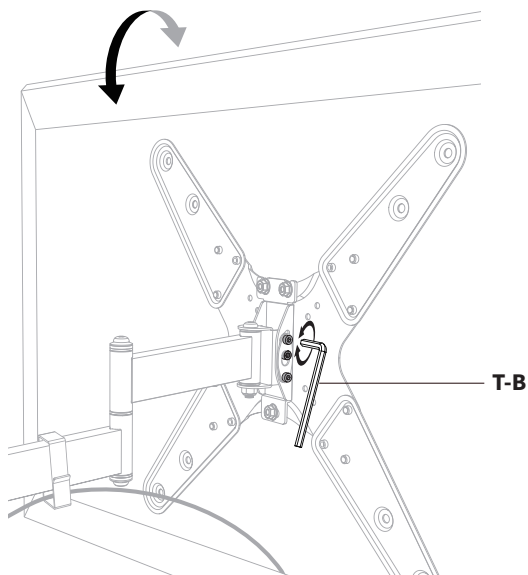



Need Help? Get In Touch

Monday-Friday from 7:00am-7:00pm CST



help@vivo-us.com



www.vivo-us.com

Chat live with an agent!



309-278-5303



VIVO-us @vivo_us

FOR MORE GREAT VIVO PRODUCTS,
CHECK OUT OUR WEBSITE AT: WWW.VIVO-US.COM