

Parts List

1	Frame	1 pc
2	Brackets	2 pcs
3	Legs	2 pcs
4	Feet	2 pc
5	Keypad	1 pc
6	Screws	16 pc



1



2



3



4



5




6



STEP 1: Adjust The Frame Width

- Adjust the frame to your desired width and install 8pcs of the M6x10 screws to secure it in place.
- Ensure the large circular holes on the side of the frame are uncovered.
- You can easily adjust the frame width later.

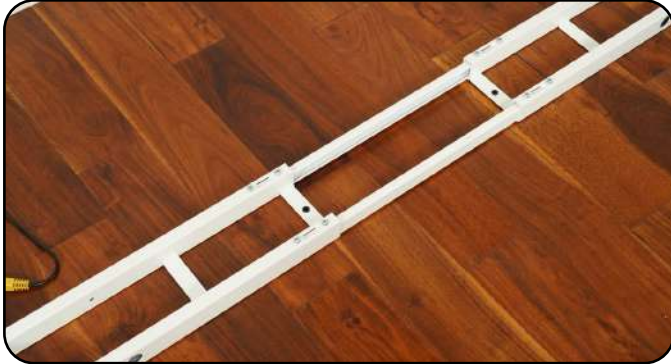

STEP 2: Connect the Columns to the Frame

- Screw the columns to the frame with 8 pcs of M6x10 screws.
- Ensure the side holes are uncovered so you can insert the screws through the frame into the column.



STEP3: Connect the Feet to the Columns

- Connect each foot to a column with 4pcs of the long M6x35 screws.
- The black, circular feet can be unscrewed later to level your desk.



STEP4: Install The Brackets

- Slide the side brackets on each end of the frame and secure them with 2pcs M6x14 screws.



How To Use The Memory Settings:

- Adjust the desk to your desired height.
- Press and hold "M" until the screen shows S1
- Press the number you'd like to save the height.



How to Reset Your Desk:

1. Press the down arrow to lower the desk. *release the down arrow*
2. Press and hold the down arrow until the screen shows ASR. *release the down arrow*
3. Press and hold the down arrow until the screen shows the numerical height. The desk should lower all the way and then raise slightly. *release the down arrow*