Installation

Tools

- Adjustable Wrench
- Teflon Tape
- Groove Joint Plier
- Screwdriver
- Silicone Sealant





Maintenance

Your new faucet is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft, damp cloth.
Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.

Safety Tips

- If you use soldering for the installation of the faucet, the plastic protective cover, will have to be removed before using flame. Otherwise, the warranty will be vold on these parts.
- Protect your eyes with safety glasses when cutting or soldering water supply lines.
- Cover your drain to avoid losing parts.


Important Points

Prlor to beginning installation, turn off the cold and hot water lines and turn on the old faucet to release built-up pressure. Wrap all threaded connections with a teflon tape. Always wrap in a clockwise direction.

Need Help

Have a question? DON'T GO BACK TO THE STORE, WE CAN HELP.
Just send an email to g-promise@vip.163.com.

Parts Diagram / List

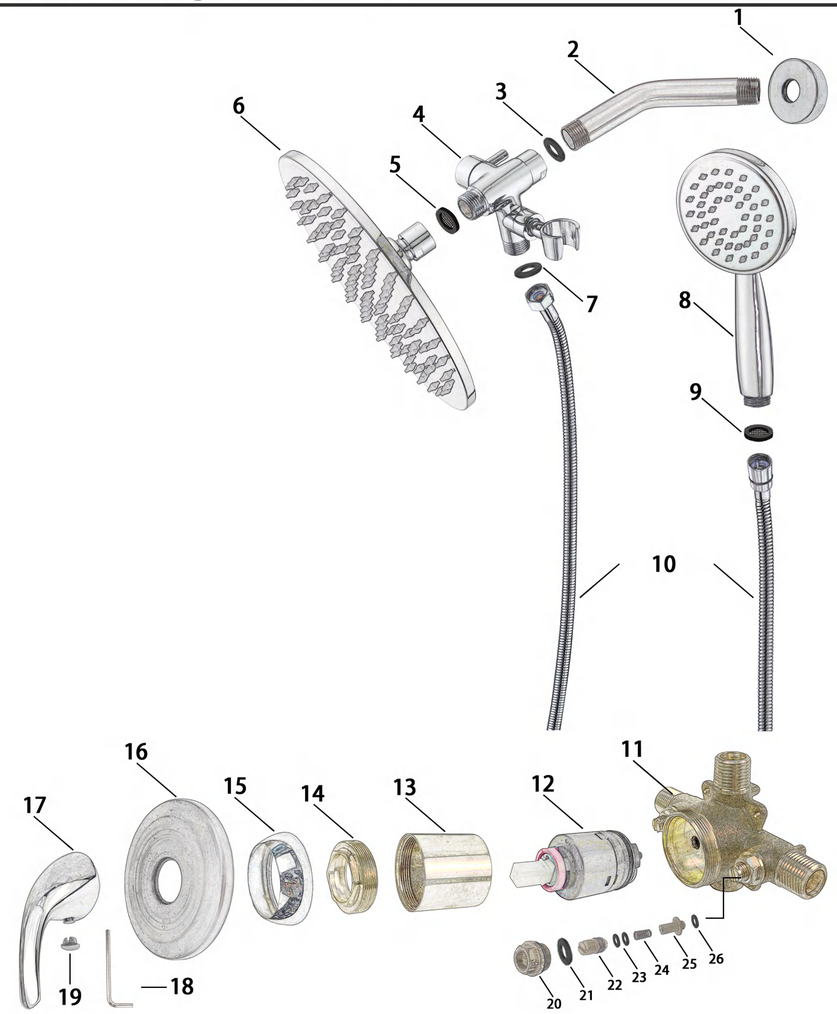



No.	Part Name	No.	Part Name
1	Shower Arm Flange	14	Lock Nut
2	Shower Arm	15	Cartridge Cover
3	Rubber Washer	16	Escutcheon
4	Solid Metal Diverter	17	Handle
5	Sand Filter Washer	18	Hex Key
6	Rainfall Showerhead	19	Small Decorative Cover
7	Rubber Washer	20	Stop Valve
8	Handheld Showerhead	21	O-Ring
9	Sand Filter Washer	22	Stop Valve Core Spring
10	Shower Hose	23	O-Ring
11	Body	24	Spring
12	Cartridge	25	Stop Valve Core Spring
13	Cartridge Protective Case	26	Water Pressure Joint

Have a question? DON'T GO BACK TO THE STORE, WE CAN HELP.
Just send an email to g-promise@vip.163.com.

Preparation/Assembly


1 . Note the installation dimension between shower arm, handle.

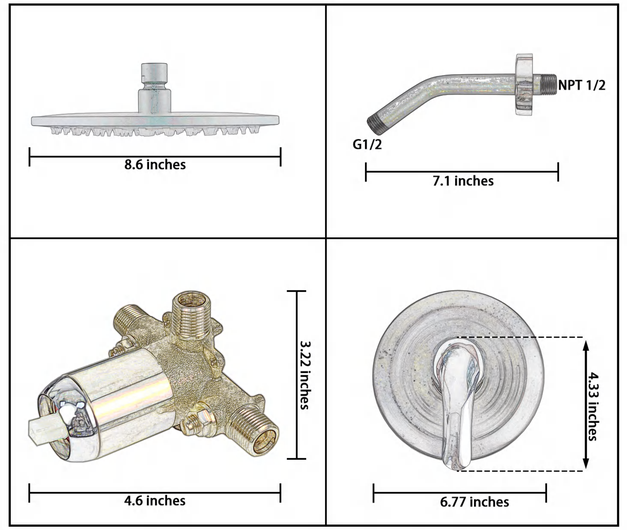


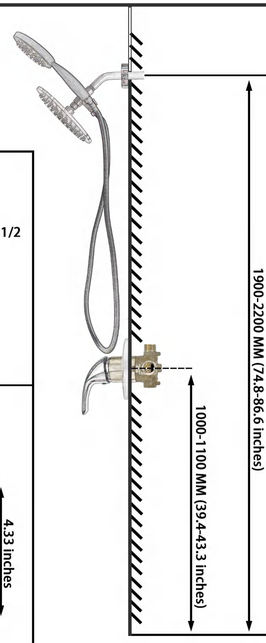


2. Please Note:Be sure the valve body is secured to the support cross board for stability.

You can fixed the valve body with the spare scerws.



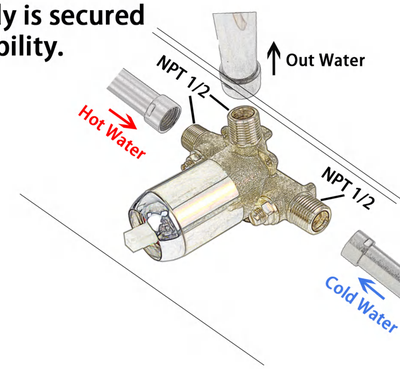

3. Turn on hot and cold water supply lines. Turn on the faucet and let the water from the showerheads for one minute to flush the debris from the line.
If there is a leak, refer to correct section and repeat step.

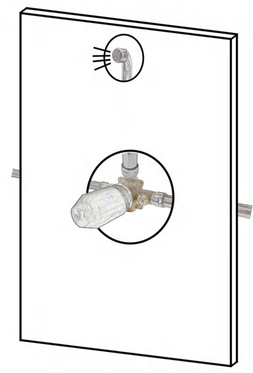

Have a question? DON'T GO BACK TO THE STORE, WE CAN HELP.
Just send an email to g-promise@vip.163.com.