

24" C-SERIES WINE RESERVE

Perlick®

HC24WB-3 24" INDOOR MODEL



Glass Door Model



Solid Door Model

GENERAL C-SERIES FEATURES



- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and black vinyl clad exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- **Industry Exclusive** full extension wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Interior lighting and digital control
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HC24WB FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes five (5) full-extension wine shelves to accommodate 40 wine bottles (based on 750 ml., 3" diameter bottles)
- Wine shelves feature stainless steel fronts
- Shelves are removable and adjustable to accommodate oversized/magnum bottles
- Cabinet construction eliminates vibration transfer to reserve
- Wine Reserve temperature 45°- 65°F

ACCESSORIES

(L)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelf (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

FORM NO. Z2529
REV. A-09/07/2018

PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	24" (610 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	5.2 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	N/A
Shipping Weight	195 lbs (88.45 kg.)


INDOOR MODELS

HC24WB-3-1L*	Stainless steel solid door, hinge left
HC24WB-3-2L*†	Panel ready solid door, hinge left
HC24WB-3-3L*	Stainless steel glass door, hinge left
HC24WB-3-4L*†	Panel ready glass door, hinge left

* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

*** Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.*

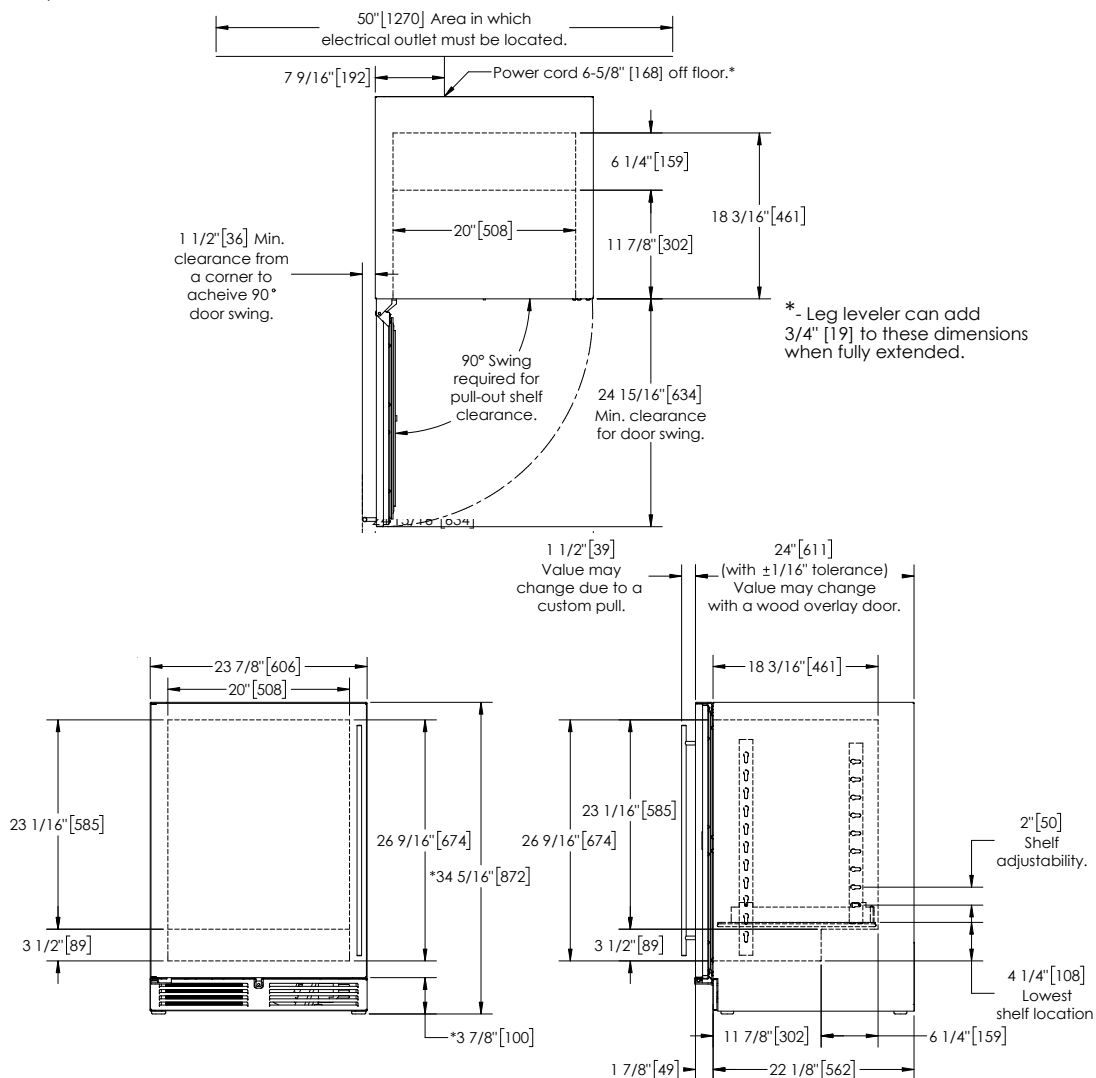

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2529
REV. A-09/07/2018