


BEDSIDE TABLE


USER MANUAL

1


ASSEMBLY INSTRUCTIONS

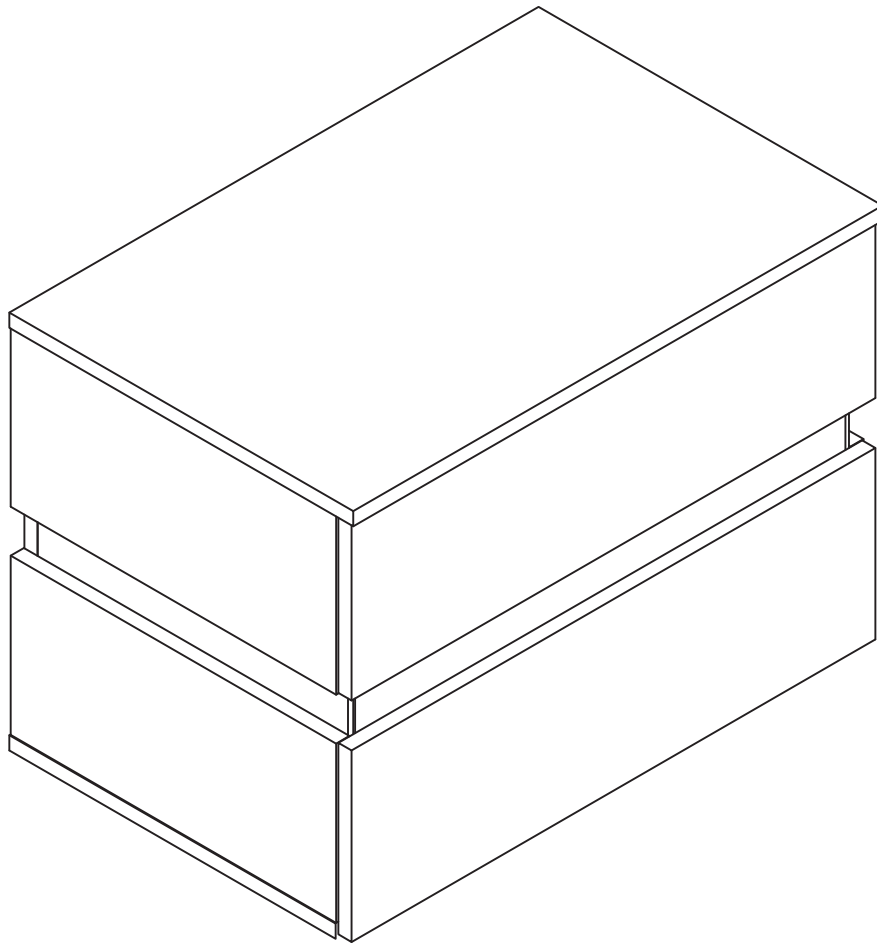


BOARD IDENTIFICATION

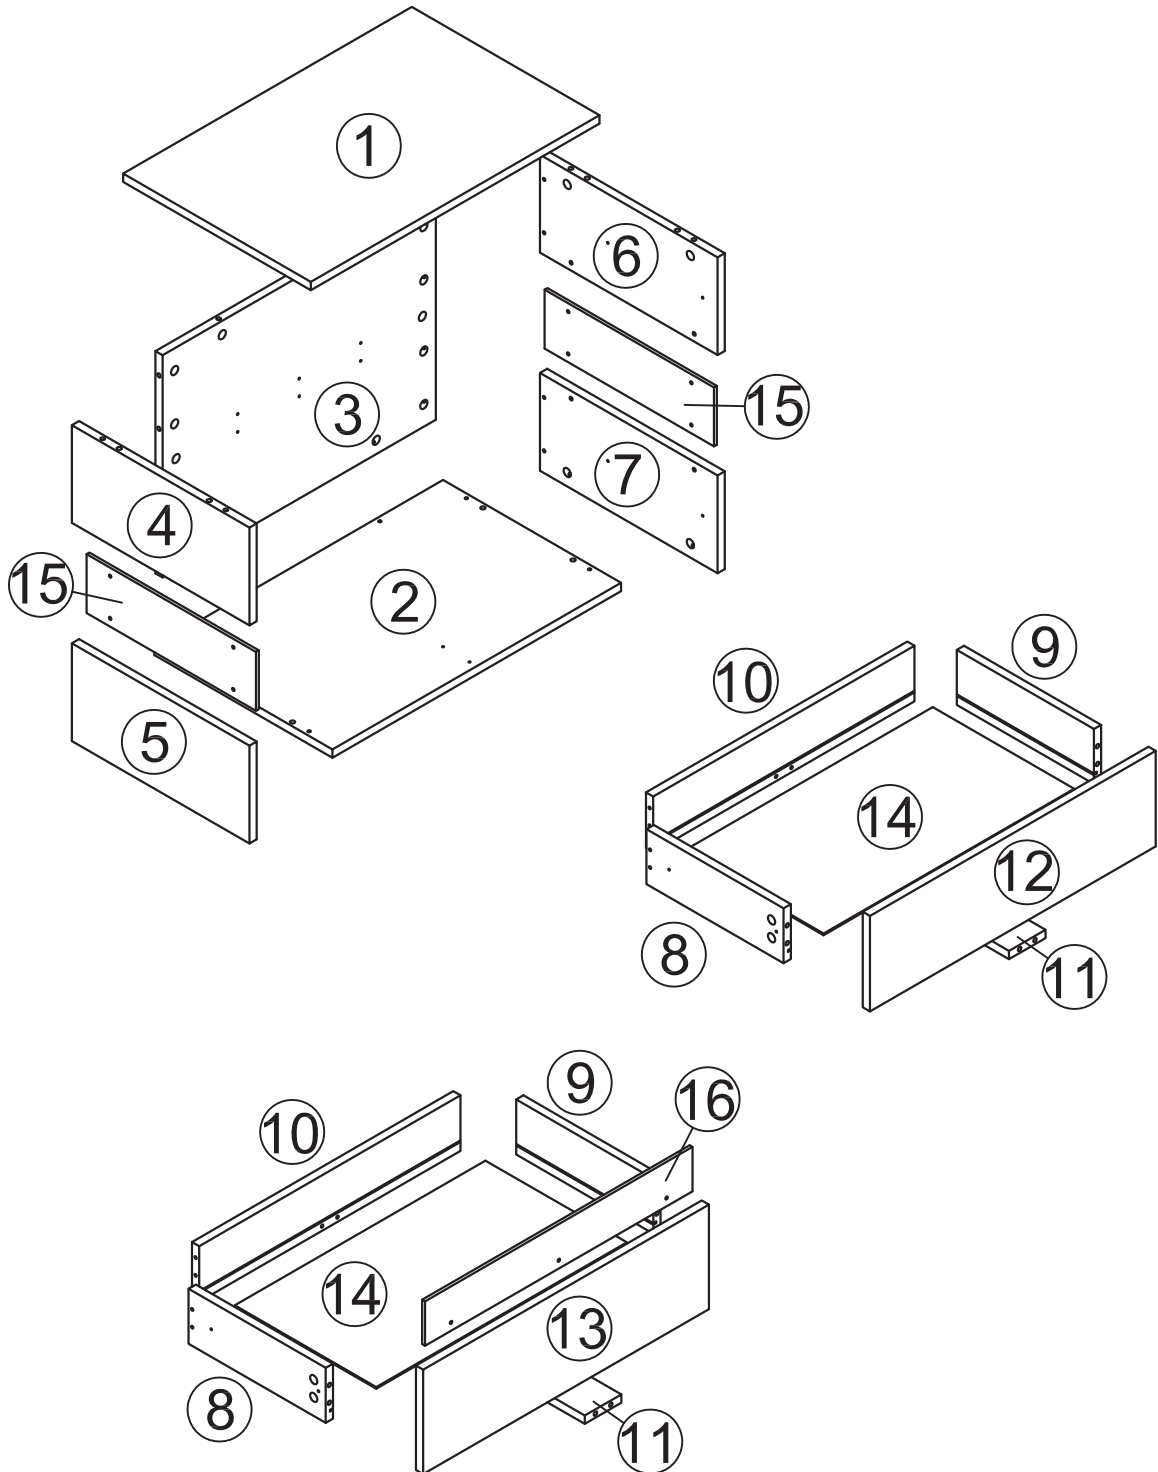


PARTS LIST




①
MAIN PANEL




②
BOTTOM




③
BACK PANEL




④
UPPER LEFT SIDE PANEL




⑤
LOWER LEFT SIDE PANEL




⑥
UPPER RIGHT SIDE PANEL




⑦
LOWER RIGHT SIDE PANEL




⑧
DRAWER LEFT
QTY:2




⑨
DRAWER RIGHT
QTY:2




⑩
DRAWER BACK
QTY:2




⑪
DRAWER BOTTOM PULL
QTY:2




⑫
UPPER DRAWER FRONT




⑬
LOWER DRAWER FRONT



⑭
DRAWER BOTTOM
QTY:2




⑮
ACRYLIC SHEETS
QTY:2




⑯
ACRYLIC SHEETS

4



1



2




3




(A) X38

CAM LOCK
F15*11




(B) X38

CAM BOLT
F7*31




(C) X4

OUTER TRACK
F20*300




(D) X4

INNER TRACK
F20*300




(E) X22

SCREW
F3.5*12




(F) X8

SCREW
F4*25




(G) X2

BOUNCER




(H) X11

BOLT

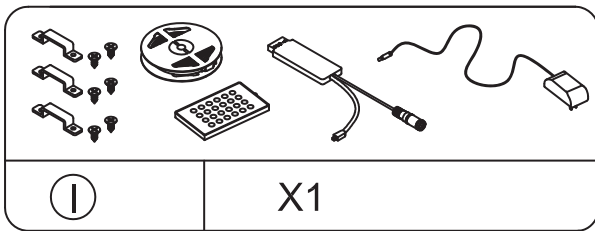


(I) X1

LIGHT STRIP




(J) X4

FOOT



(K) X8

WOOD DOWEL
F8*30





(L) X8

SCREW
F4*35

5

STEP 1




- Attach panel (15) to (4) & (5) with screw.
- Attach panel (15) to (6) & (7) with screw.

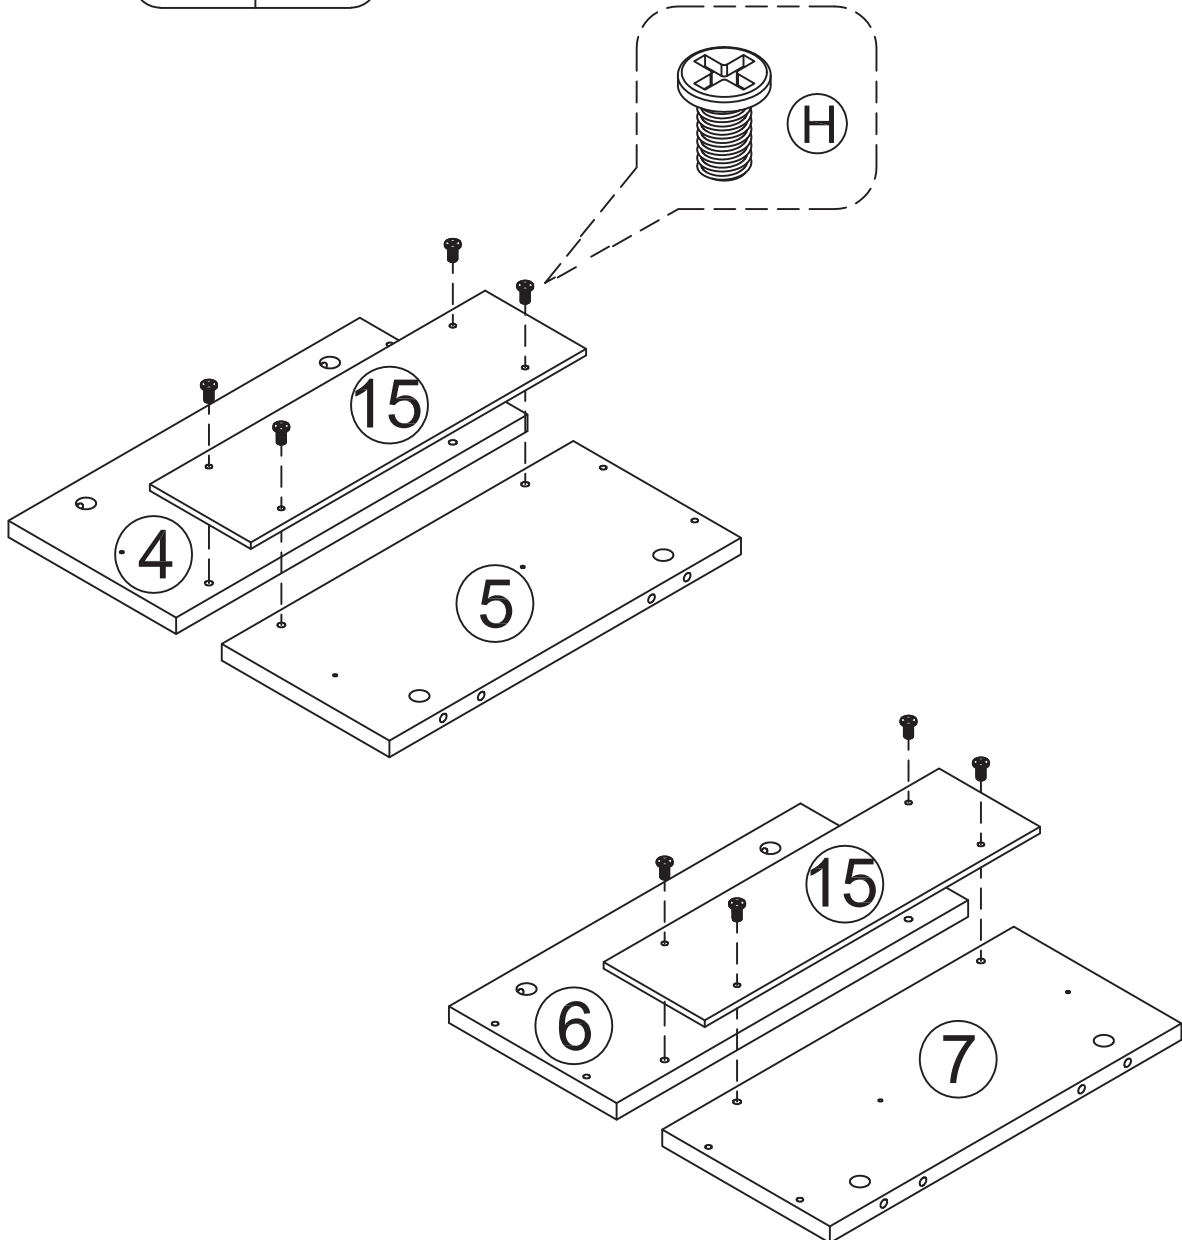

6

STEP 2

- Screw cam bolts (B) into panel (4) & (5) & (6) & (7) .
- Insert wood dowels (K) into panel (4) & (5) & (6) & (7) .

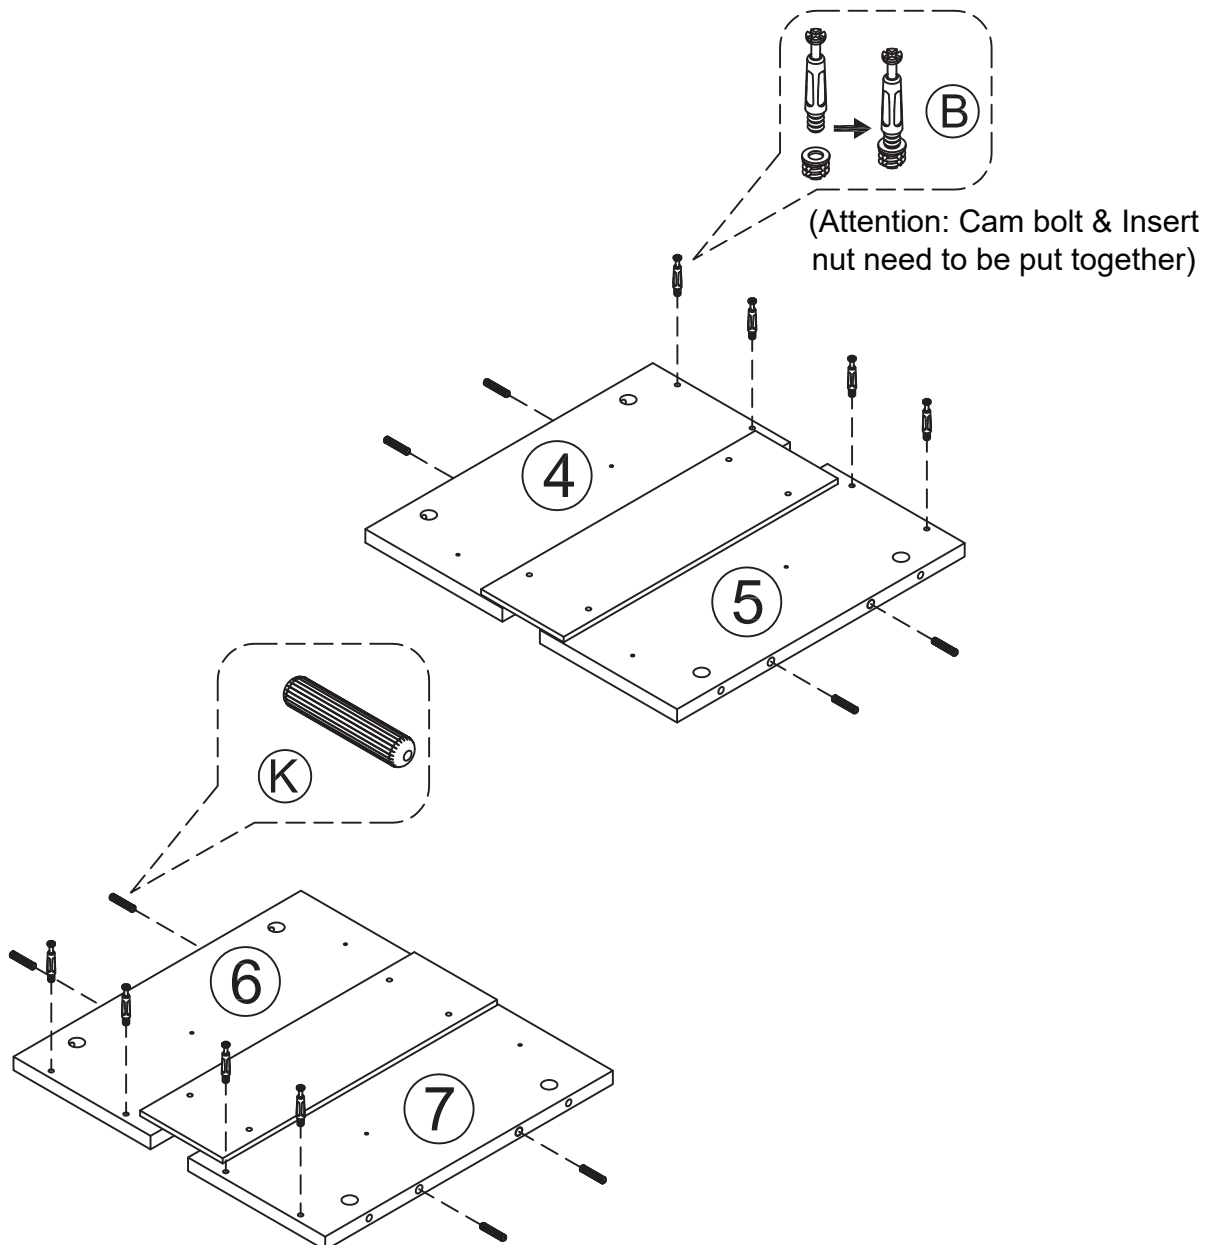

STEP 3

WARNING

How To SEPARATE BALL BEARING SLIDE.

- 1) Pull toward arrow to open the slide until its stops and then flip it over.



- 2) Push plastic lever down and pull apart.



OUTER TRACK



INNER TRACK




Align the outer track with the center of the inner track and push in.

Three-section track installation video


STEP 4

- Install drawer track (C) to panel (4) & (5) & (6) & (7) with screws(E).





Fasten the screws in the second hole in the front and the second hole in the rear of the drawer rail.

The direction of the arrow is that the front is fixed on the plate.

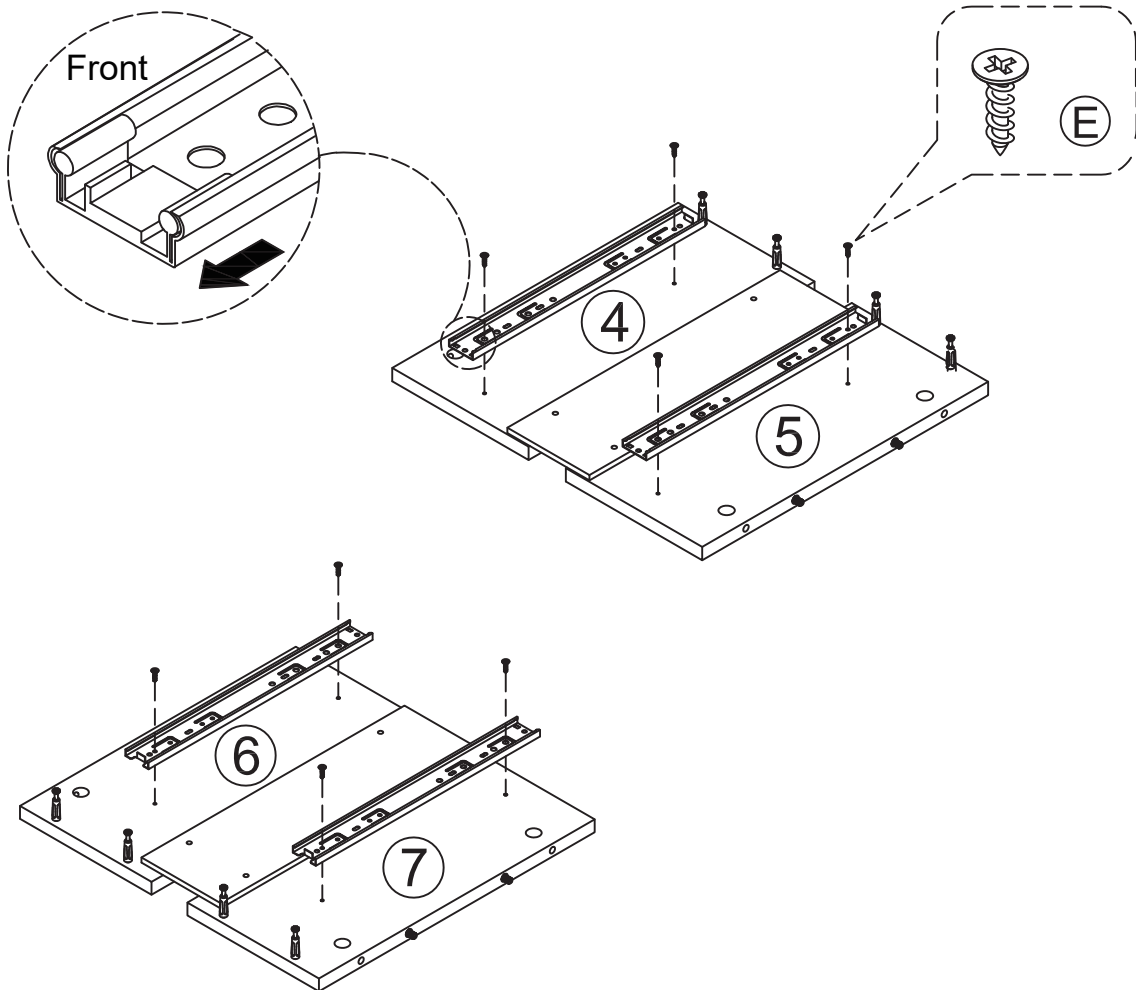



STEP 5

- Stick LED band to the side of the back panel.
- Fasten the LED band with buckles.

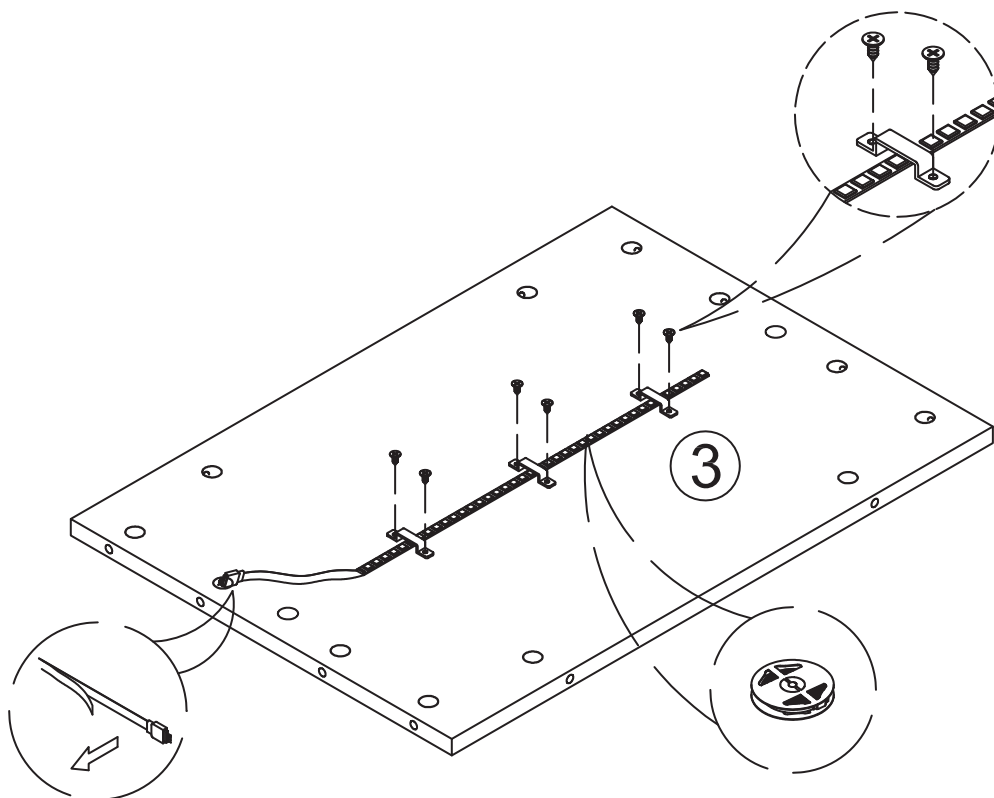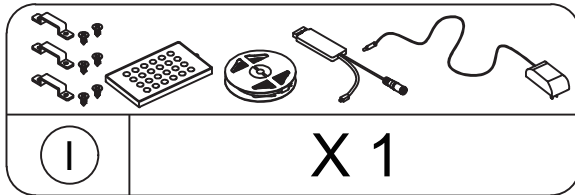







STEP 6

- Attach panel (4) & (5) & (6) & (7) to (3) with cam locks (A).

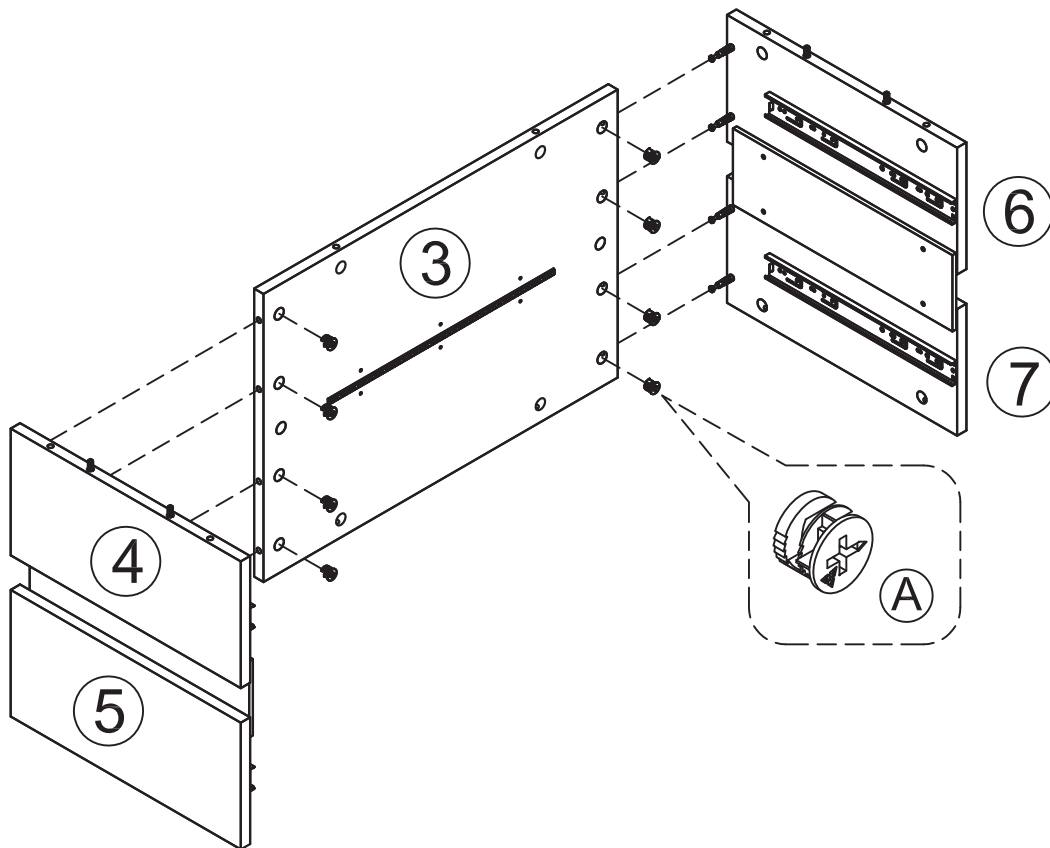



STEP 7

- Attach foot (J) to panel (2) with screw (F) .
- Screw cam bolts (B) into panel (2) as below shown.
- Lock the rebounder (G) to the panel (2) with the screw (E) .

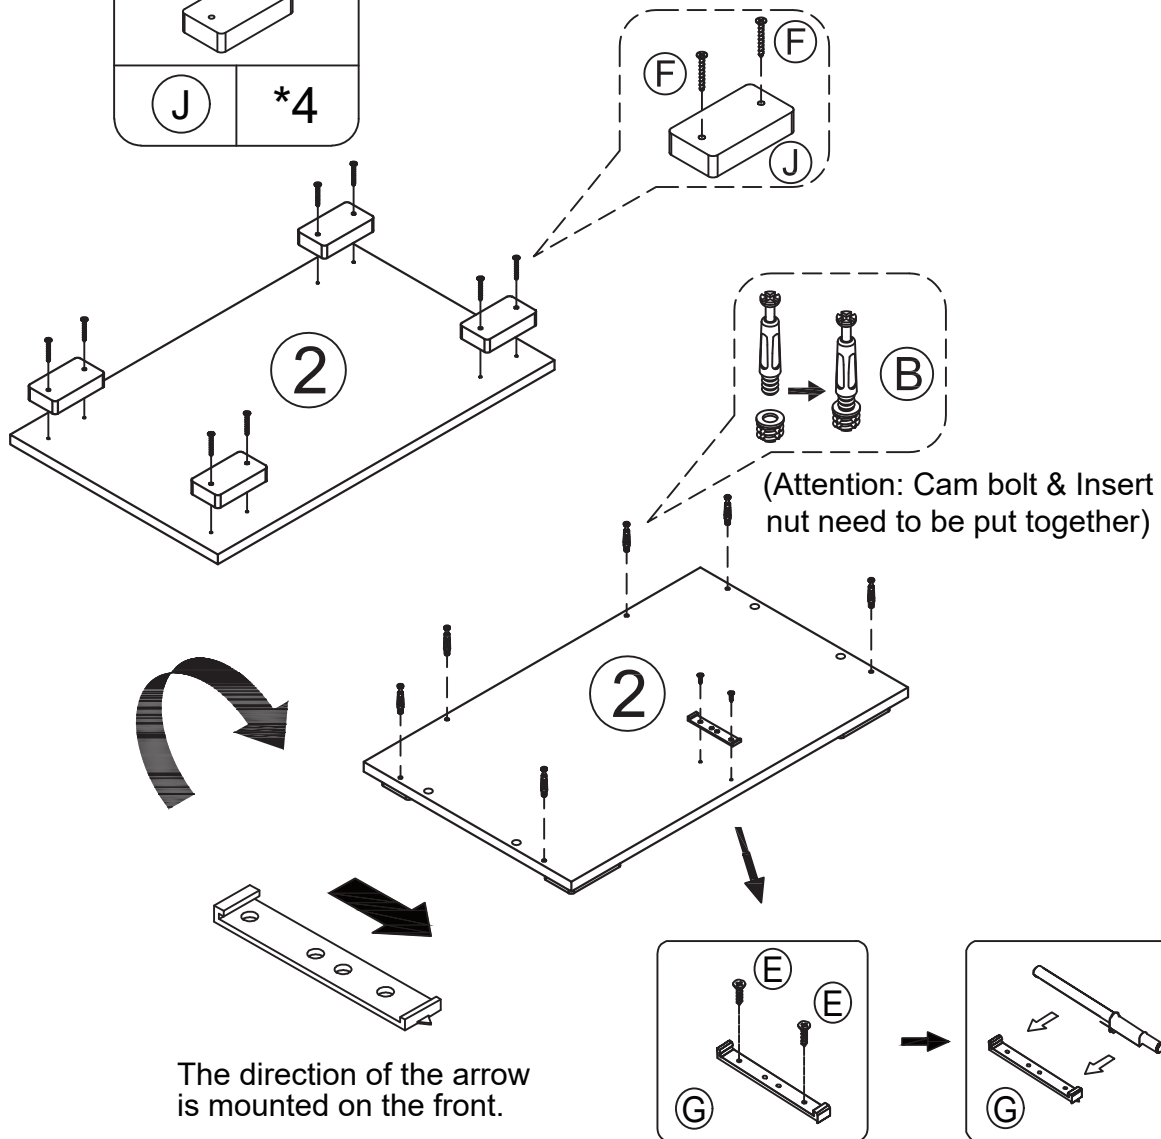




STEP 8

- Attach panel (3) & (5) & (7) to (2) with cam locks (A).

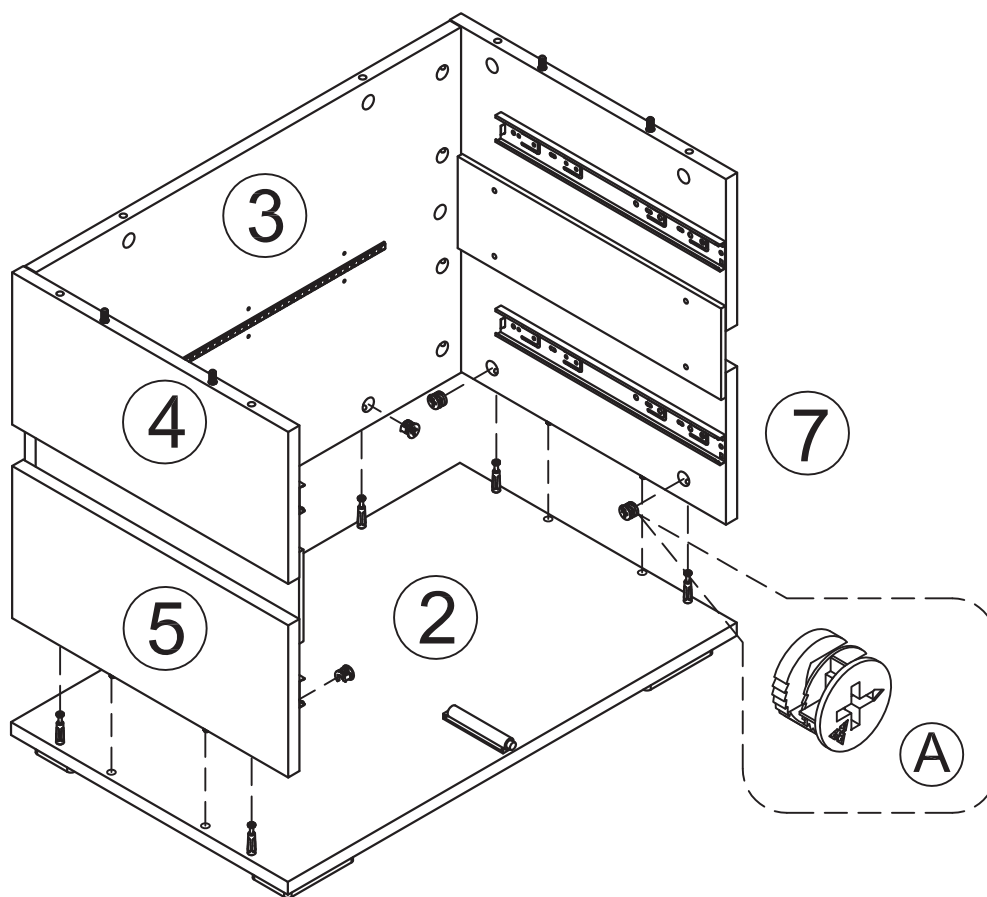


STEP 9



- Screw cam bolts (B) into panel (1) as below shown.
- Lock the rebounder (G) to the panel (1) with the screw (E) .





Rebound device installation video



(Attention: Cam bolt & Insert nut need to be put together)

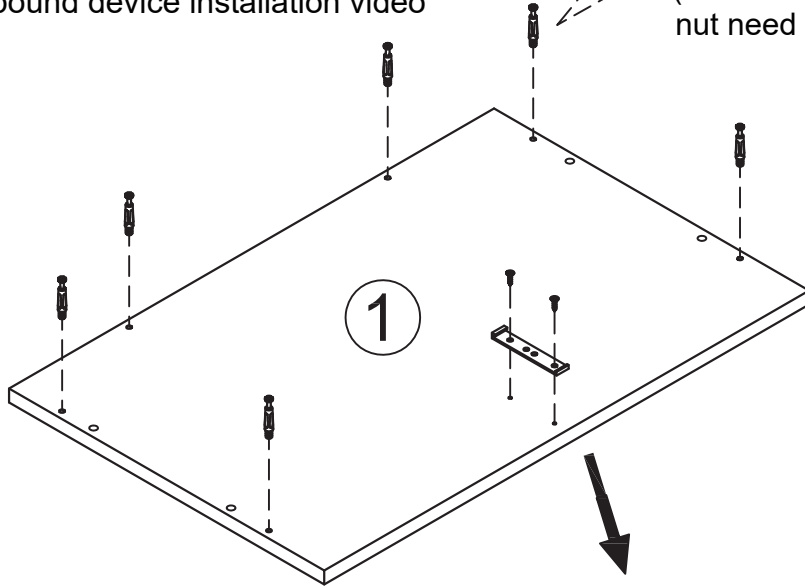



The direction of the arrow is mounted on the front.



14



STEP 10

- Attach panel (1) to (3) & (4) & (6) with cam locks (A).


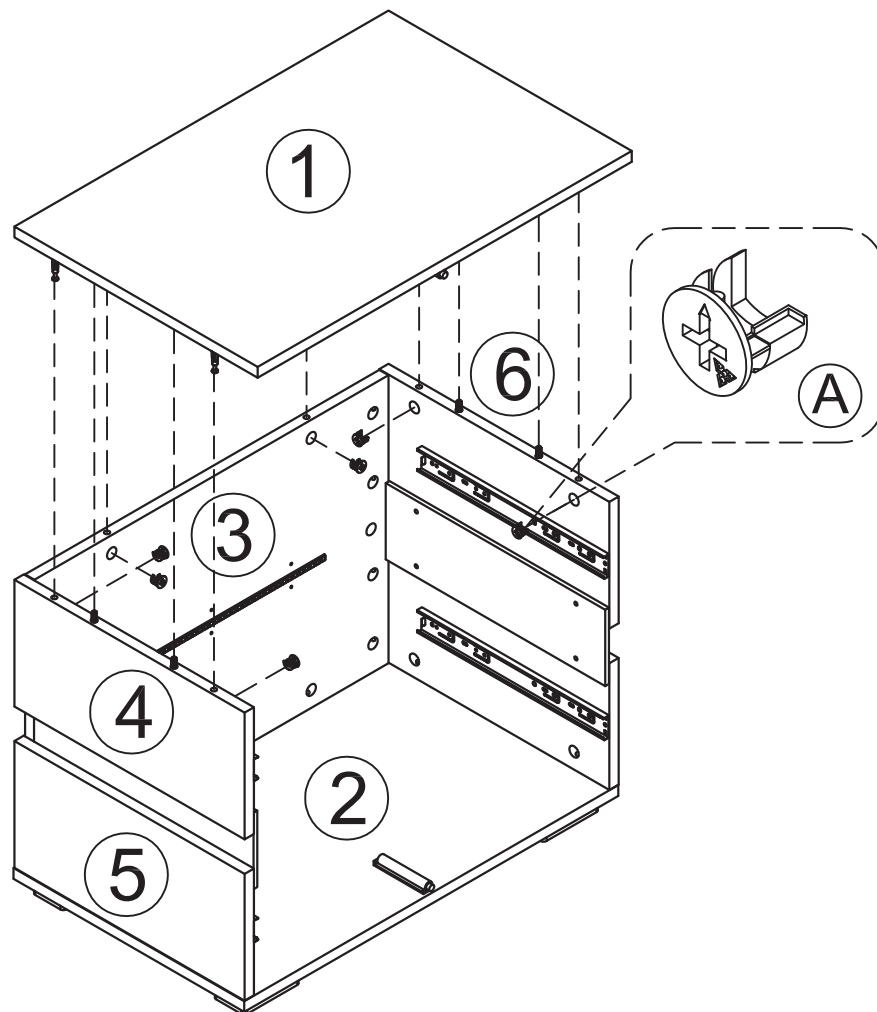



STEP 11

- Screw cam bolts (B) into panel (10) & (12) as below shown.

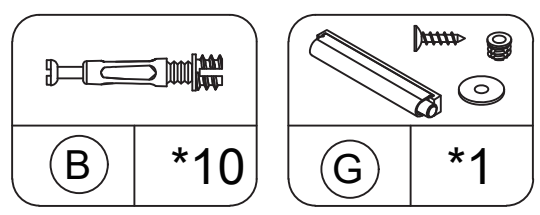



(Attention: Cam bolt & Insert nut need to be put together)

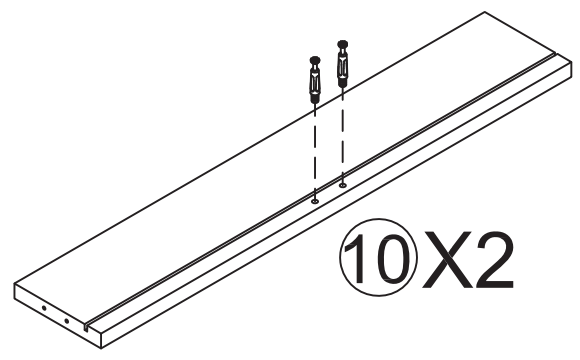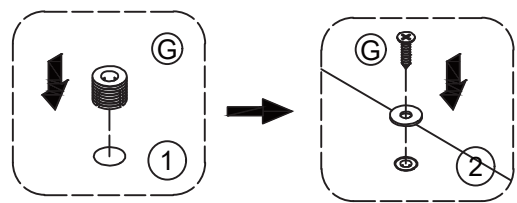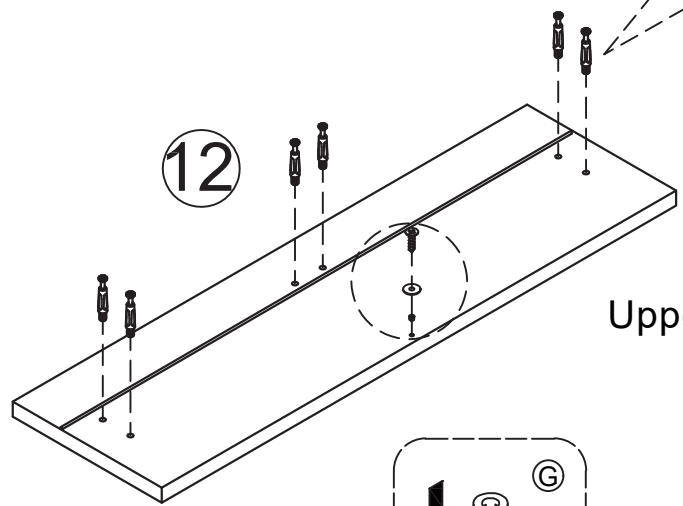

16



STEP 12

- Attach panel (16) to (13) with screw (H) .
- Screw cam bolts (B) into pa nel (13) as below shown.

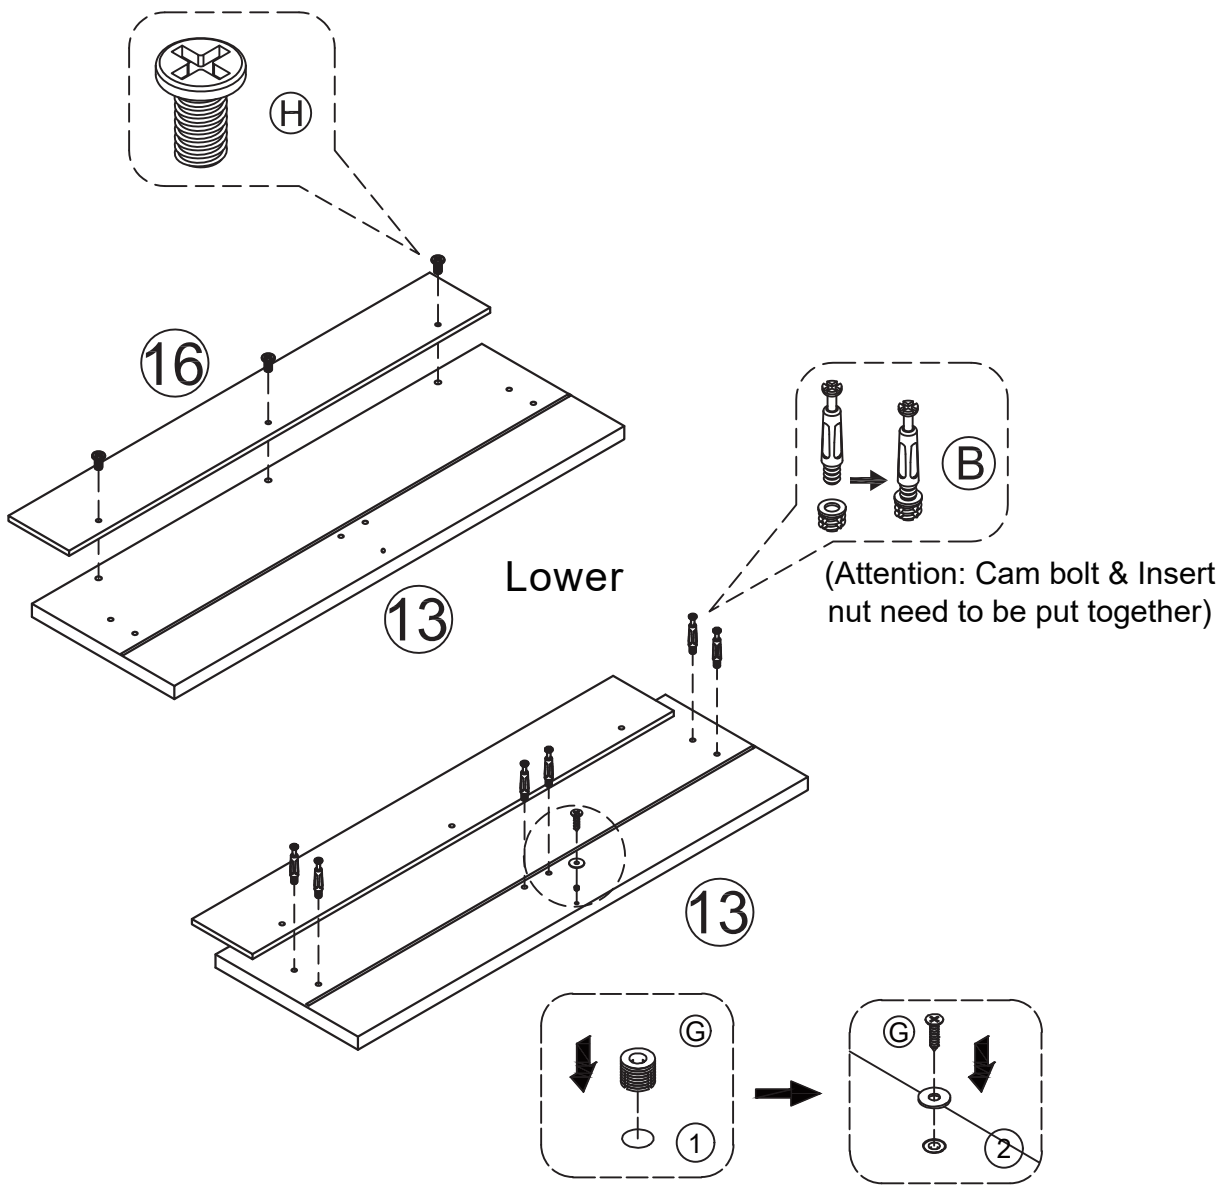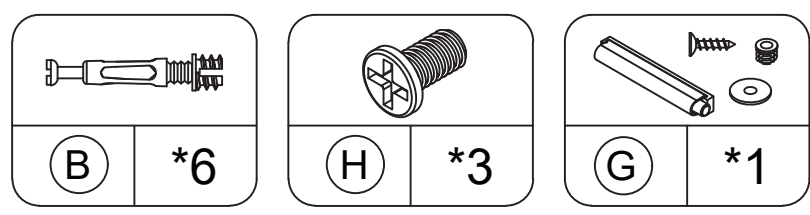


STEP 13

- Attach panel (11) to (10) with cam locks (A).
- Attach panel (8) & (9) to (10) with screw (L) .





X2

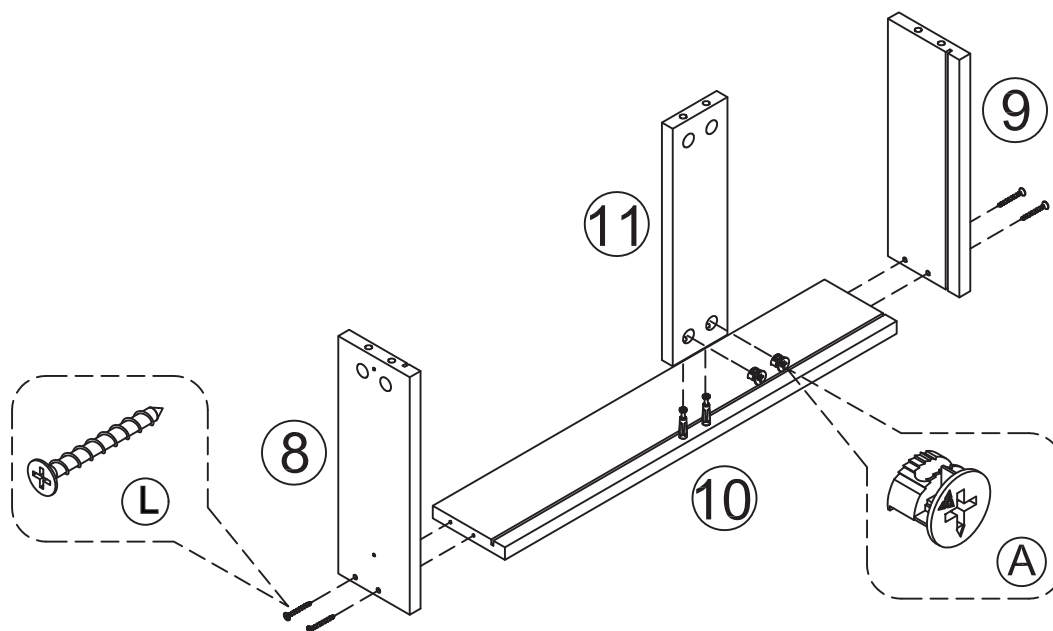



STEP 14

- Insert panel (14) into the grooves.
- Attach panel (12) & (13) to (8) & (9) & (11) with cam locks (A).

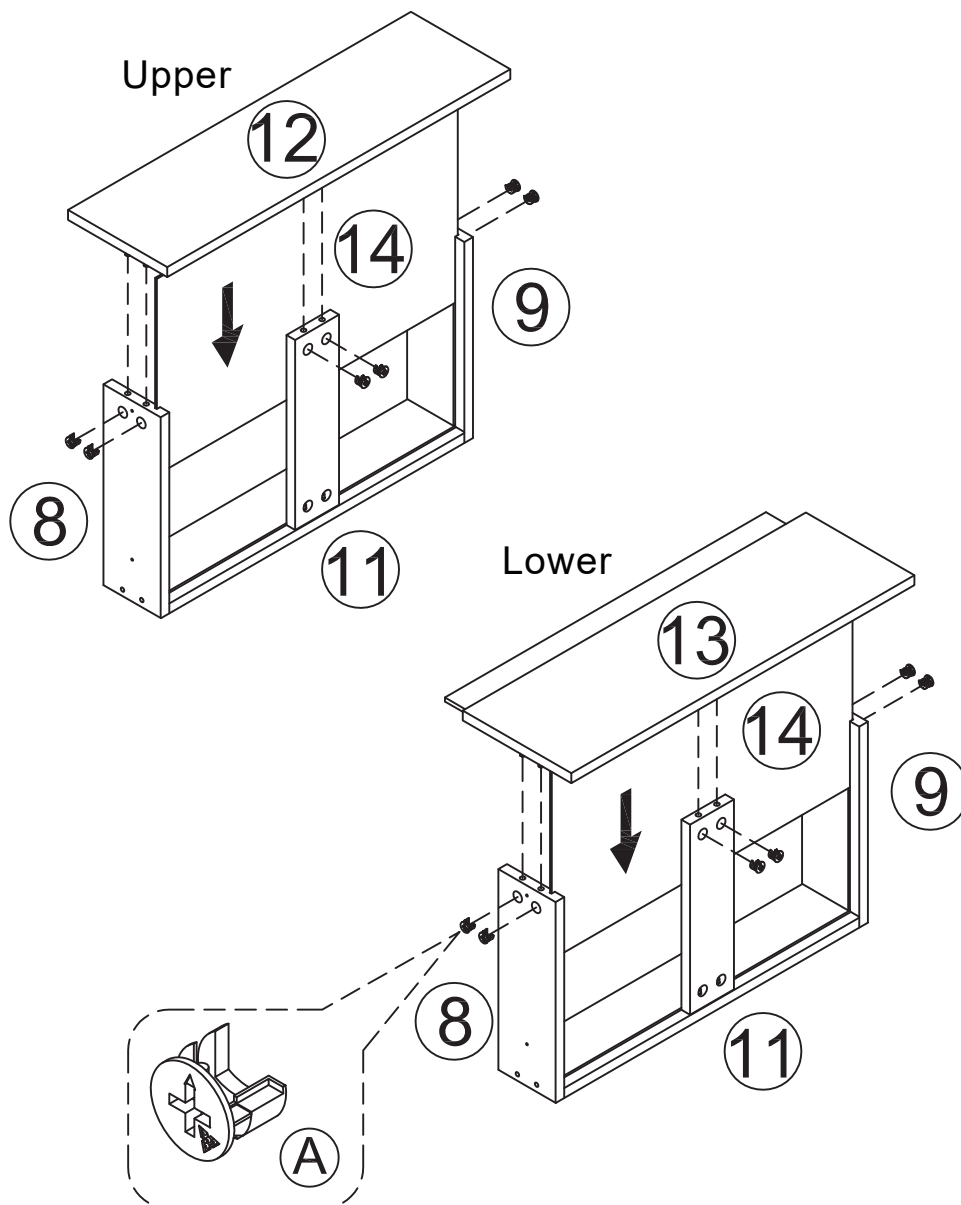


STEP 15

- Install drawer track (D) to panel (8) & (9) with screws(E).

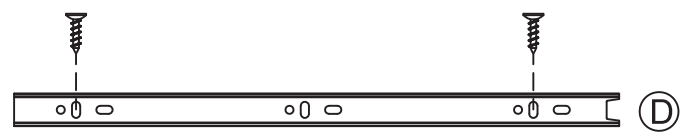


Fasten the screws in the second hole in the front and the second hole in the rear of the drawer rail.

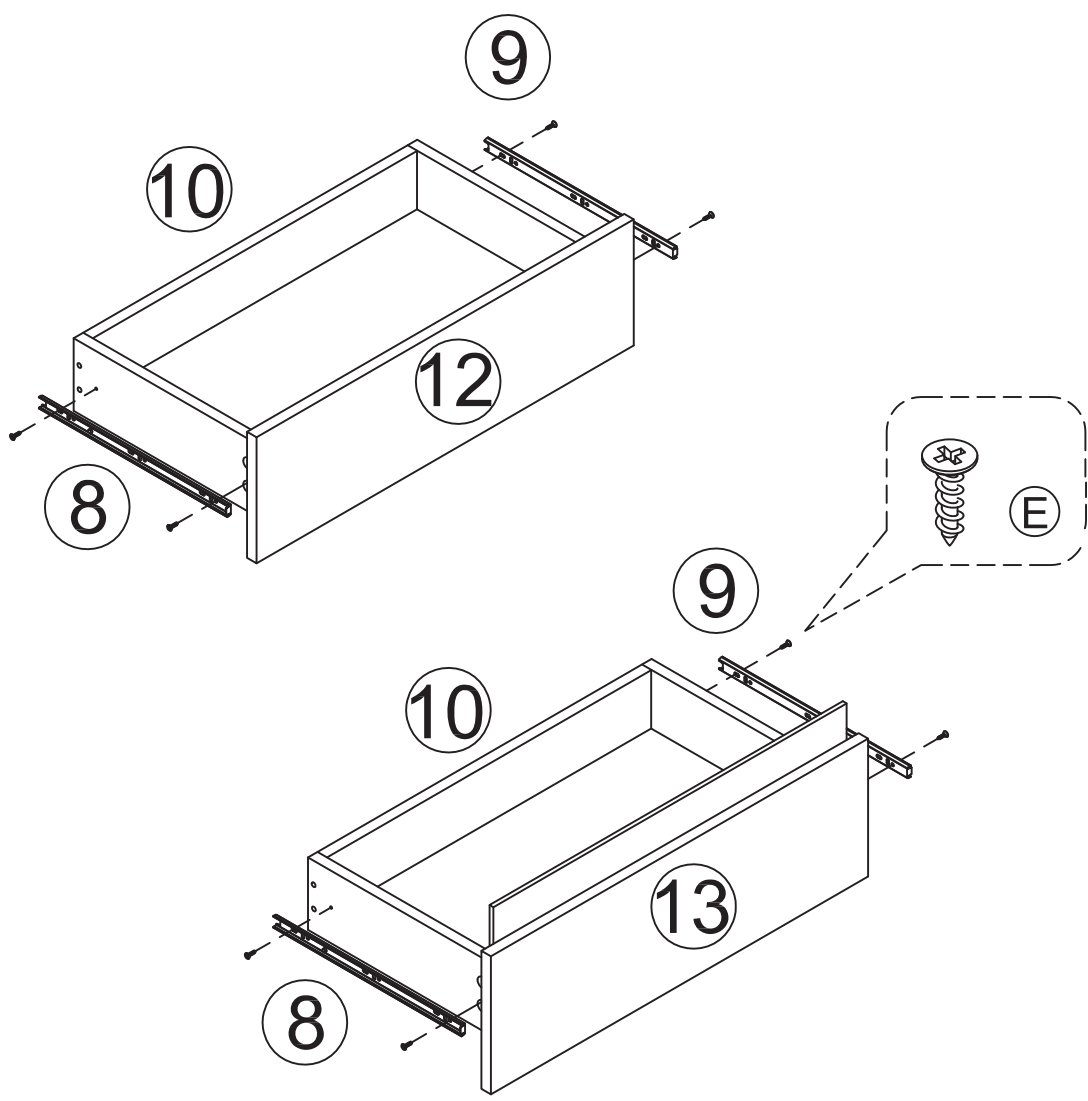


STEP 16


- Connected power adapter to the RGB control box as below.
- Specifications of battery:cr2025 3v
- LED lamp with effective remote control distance of 5 meters

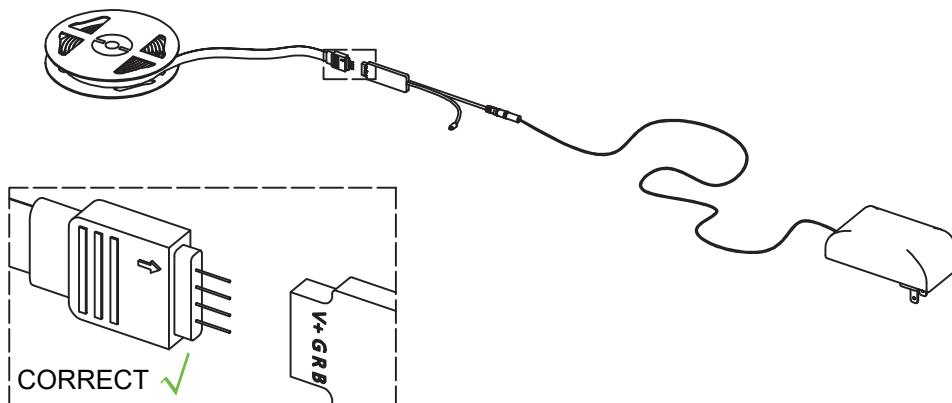

1.Align the arrow of the light strip plug with the controller (V+) to connect

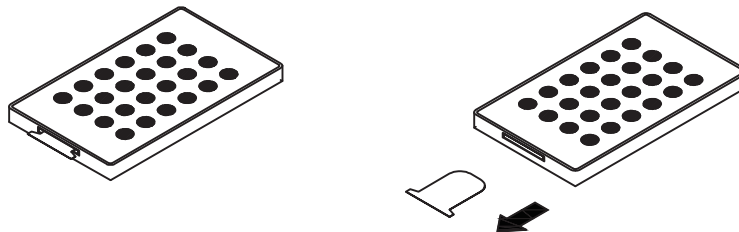


2.Take out the remote control gasket

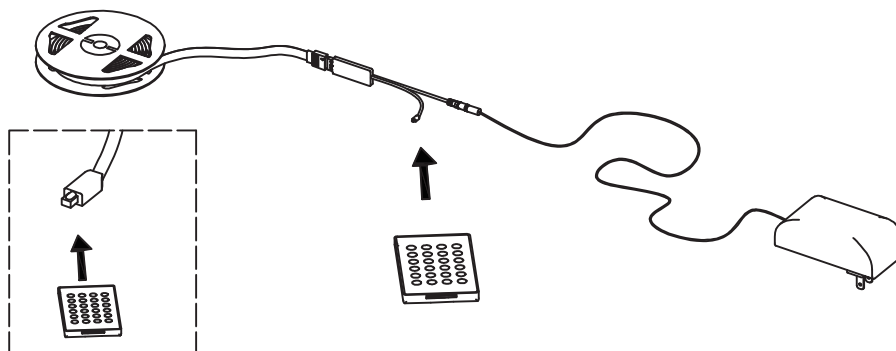


3.Align remote controller to the RGB Control box to adjust the color mode

STEP 17

APP PROGRAM USAGE

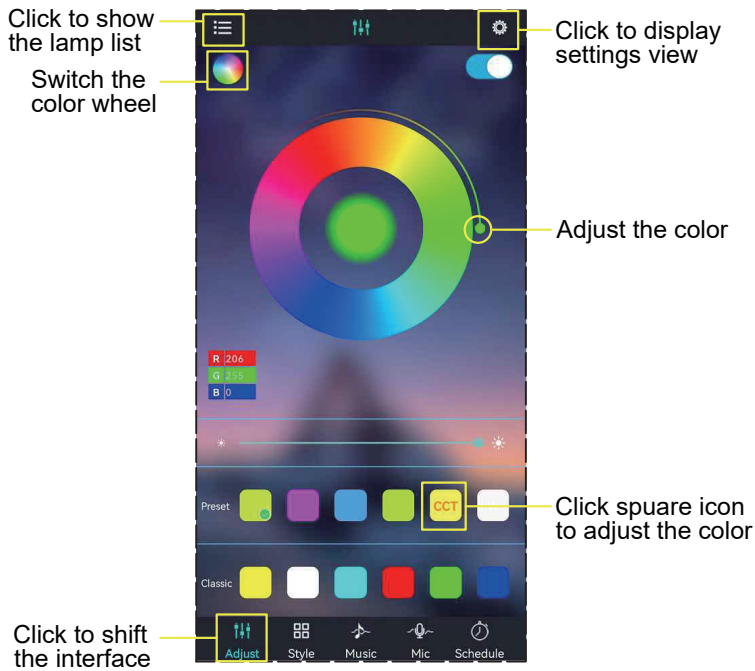

- Scan two-dimensional code download APP
- ① Connect LED color strip and controller, power on controller
 - ② Scan two-dimensional code download APP:
 - ③ Start APP, search and connect controller
 - ④ Enjoy the Bluetooth wireless control experience

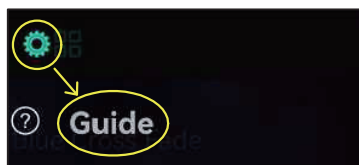

Notes:
detailed operating instructions,
enter the menu "Guide":

- Product Paramters:
- Bluetooth: BLEV4.2
 - Input Voltage:4.5~26V
 - Working Temp:-25~75°C
 - Size:43*22*11mm
 - Weight:30g
 - Max Power:144W(24V)


LED mobile phone Bluetooth

controllerProduct Features

- LED Bluetooth controller is directly via mobilephone control remote distance can reach 20m without the need to set up, easy to connect open the software within 5 seconds you can automatically connect the controller
 - Flow the rhythm of the music changes
 - Group control
 - Brightness, speed addition and subtraction
 - Maximum can be 10 meters RGB(W) strip
 - The software shows that the text is based onthe language of the mobile phone set up automatic transformation of Chinese and English
- Animation Effect:
- Colorful gradient
 - All kinds of monochrome, double color gradient
 - All kinds of monochrome, double color,colorfull flashing
 - Colorful jump
 - Follow the thymhm of the music chagnes

STEP 18

- Insert the drawers.

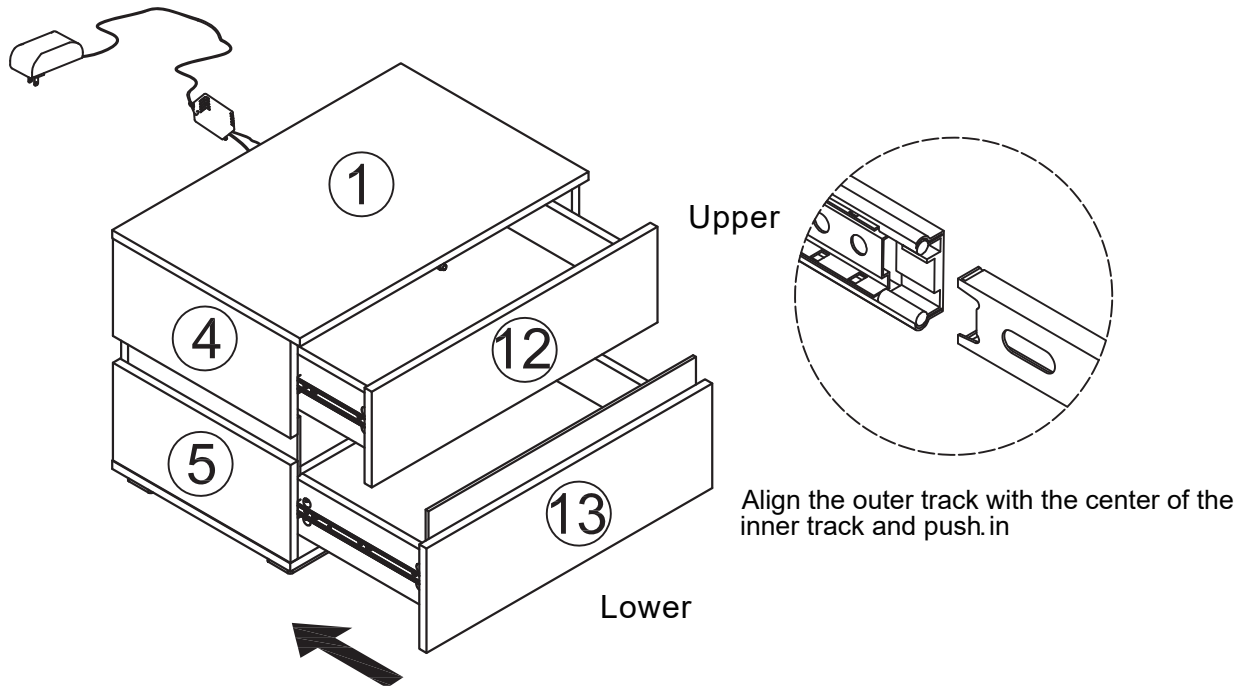

STEP 19

- Installation complete.

