


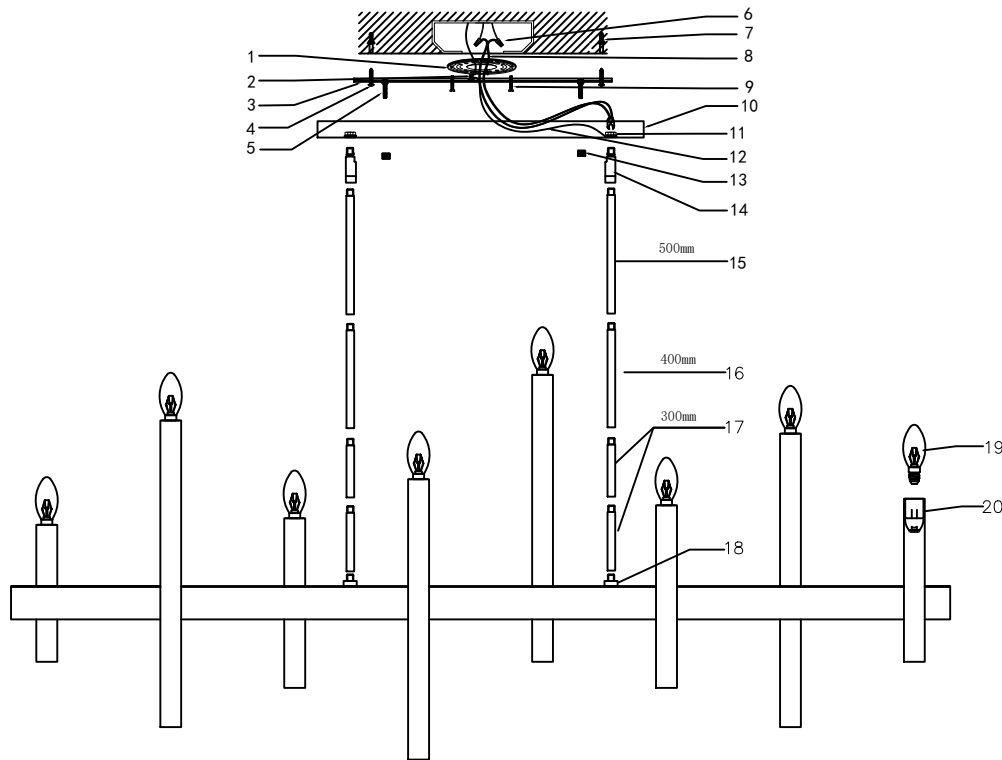

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

A: Determine what combinations of hanging rods (17: L11.8 in* 4pcs, 16: L15.7 in* 2pcs, 15: L19.7 in* 2pcs) are needed to achieve your desired hanging height, slip the rod one by one over the fixture main wire(8), and then assemble them together to attach on the lamp body(18).

B: Put the fixture ground wire(12) over the sloped-ceiling adapter(14) and then use the hexnut and washer kit(11) to fix the sloped-ceiling adapter(14) with the canopy(10). Thread the fixture main wire(8) out through the canopy(10) and attach the hanging rod kit to the canopy kit.

C: Place the mounting strap(3) on the ceiling, mark 2 mounting holes, and drill. Insert the plastic anchors(7) into the holes. Secure the round mounting bracket(1) to the junction box using two bolts(9) and then secure the mounting strap(3) onto the ceiling with 2 screws(4).

D: Connect matching wires with wire connectors(6) as follows:

Fixture BLACK wire to home LIVE wire.

Fixture WHITE wire to home NEUTRAL wire.

Fix the fixture ground wire(12) and home ground wire to the round mounting bracket(1) using green screws(2)

NOTE: The bare wire can NOT be exposed to prevent leakage.

E: Align mounting holes of the canopy(10) with the mounting bolts(5), screw up the cap nuts(13) to fix the whole light fixture to the ceiling.

F: Install 8 pcs of E12-base bulbs onto the sockets and done.