


edishinē

Wall Light

[Instruction Manual]

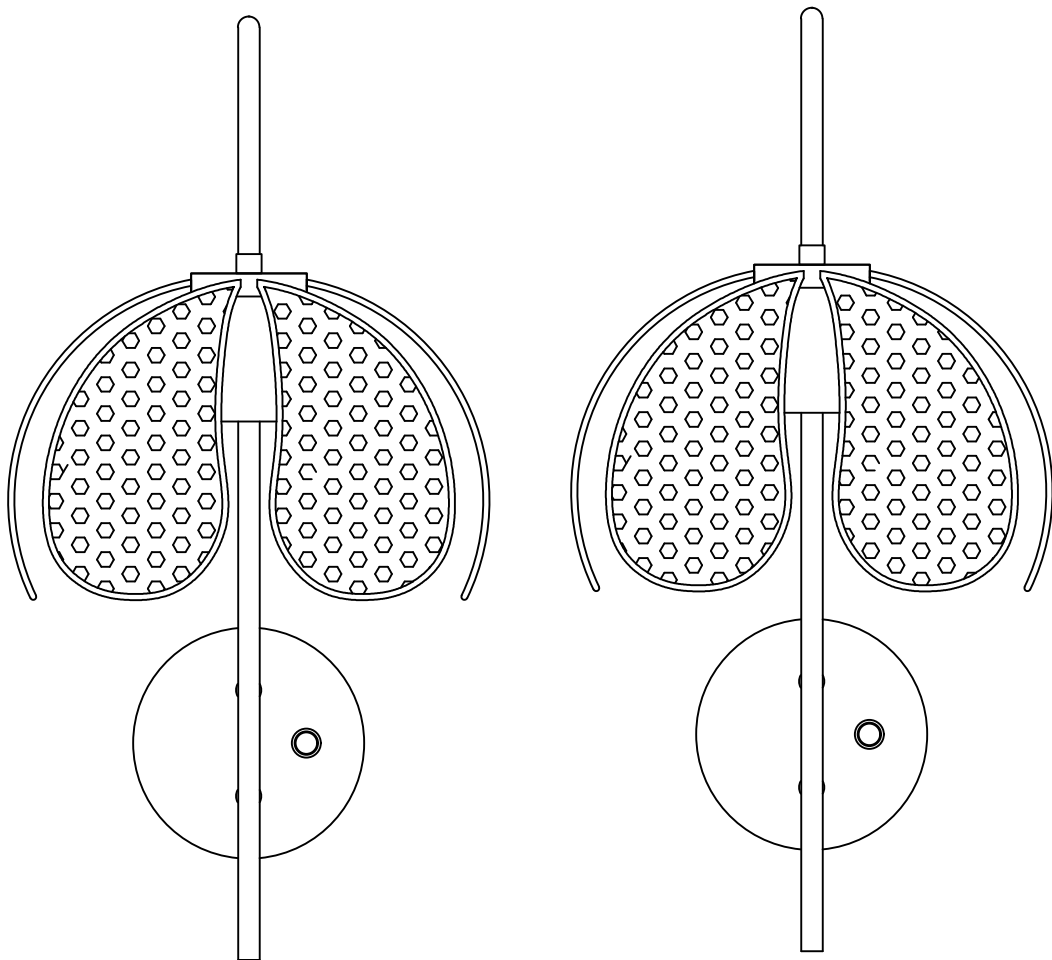


Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

WARNING:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Packing List

Part	Description	Quantity
	Luminaire Main Chassis	2
	Lamp Shade	12
	Screw	24
	Small Screwdriver	1
	Hole Plug	2




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL




FIG.3 FUSE BOX

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position.


Depending on which type of fuse box in your home.

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.

Fig 1

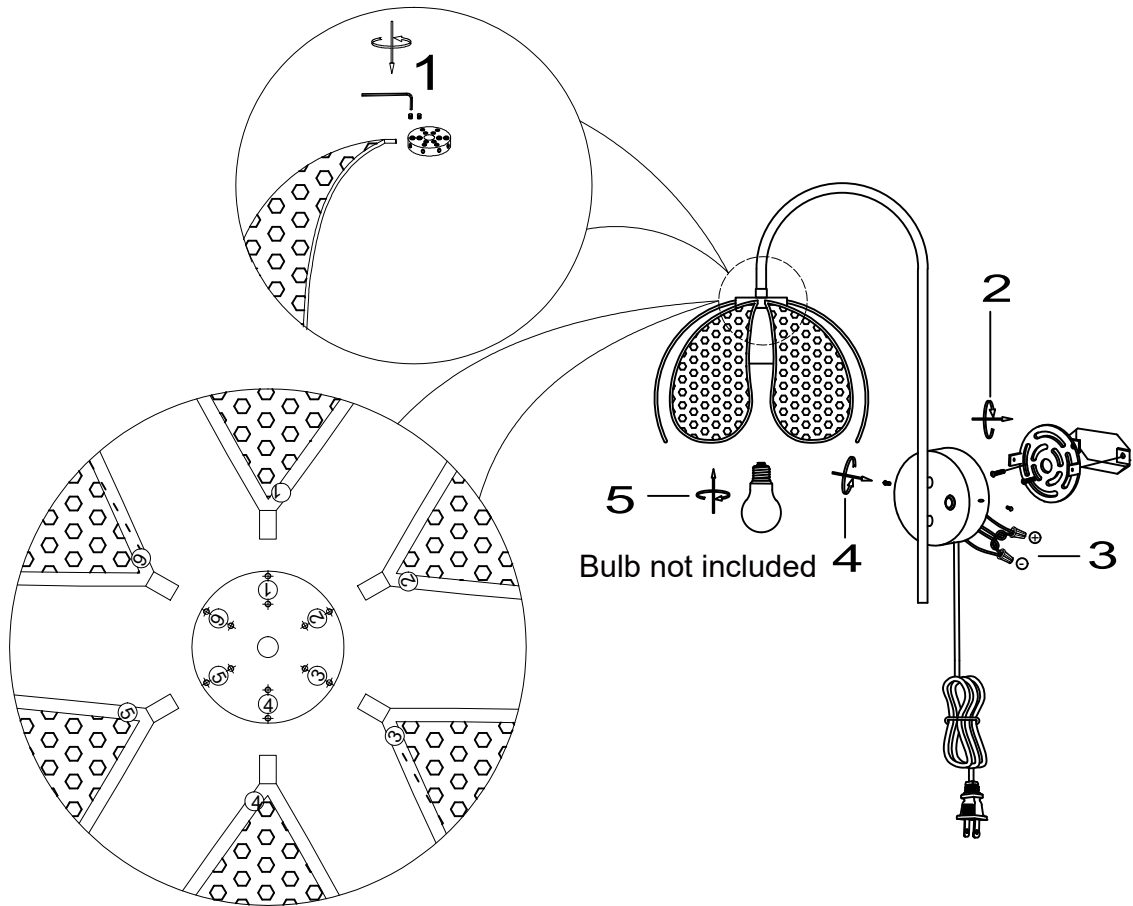


ASSEMBLING THE FIXTURE

1. Align the numbered screw holes on the lamp shade blades with the corresponding holes on the fixture body (as shown in the diagram) and insert them into the side holes. Use a tool to securely fasten the screws.
2. Drilling two holes in the wall, distance and the same distance from the through hole of mounting bracket, then loaded Expansion sleeve. Attach the mounting plate to the wall, aligning the Expansion sleeve, lock it securely with the two screws.
3. Use wire nuts to secure and conceal all wiring behind the backplate.
4. Attach the fixture to the mounting bracket by aligning the backplate holes with the screw holes on the bracket, then secure it firmly with the provided fixture mounting screws.
5. Install the light bulb as illustrated, rotating it clockwise until tight (bulb not included).

If you need to install directly on a wall with a junction box instead of using the Power Cord with Plug, then follow the Fig 2 installation steps.

Fig 2

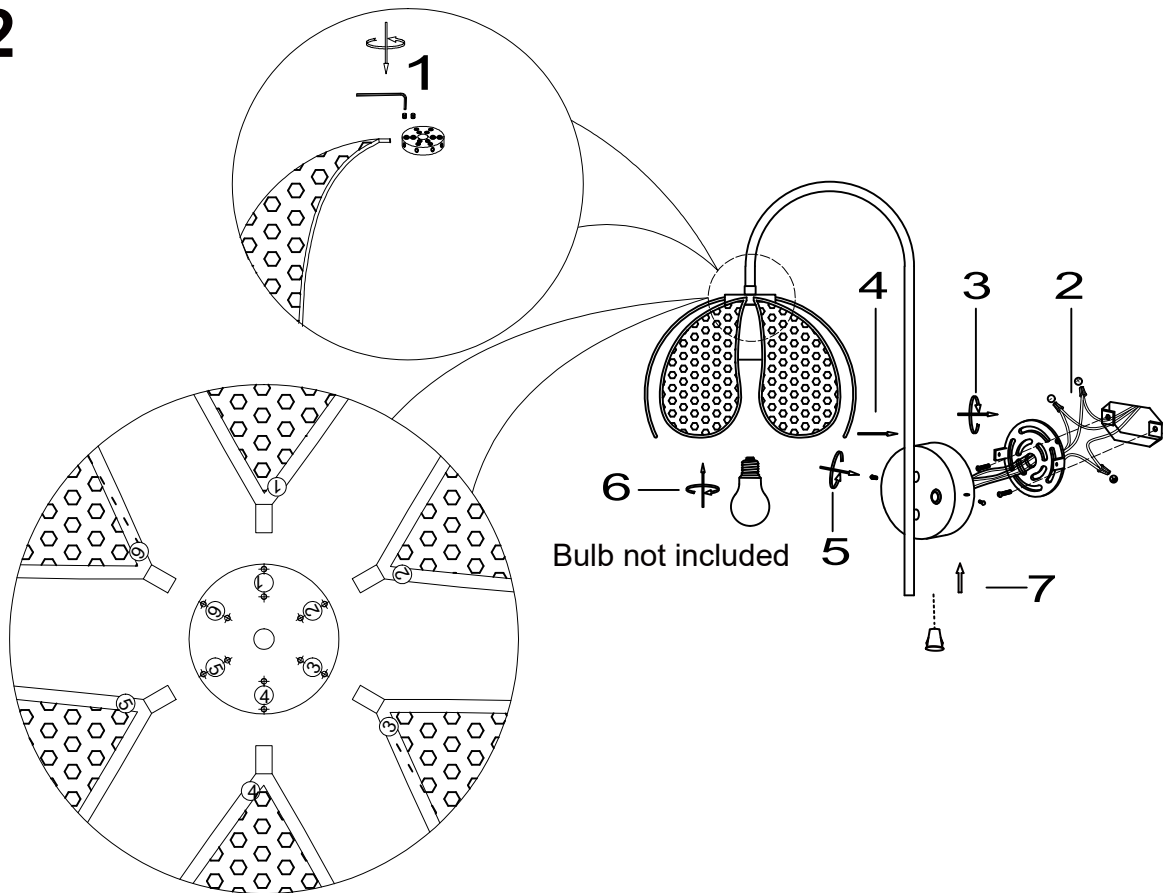

ASSEMBLING THE FIXTURE

- 1.Align the numbered screw holes on the lamp shade blades with the corresponding holes on the fixture body (as shown in the diagram) and insert them into the side holes. Use a tool to securely fasten the screws.
- 2.Install mounting bracket onto junction box with provided Mounting screw.
- 3.Connect Ground Wire(copper wire) from the light to the ground wire from junction box by using Ground Screw onto the bracket.
Connect Black Live Wire from light to the bare end of live wire from junction box by twisting wire connector.
Connect the White Neutral Wire from the light to the bare end of neutral wire from junction box with the other wire connector.
- 4.Make sure the wire connections are secure. Tuck the wire connections neatly into the wall junction box.
- 5.Position the fixture against the mounting bracket, aligning the backplate holes with the inner screw holes of the bracket. Secure the fixture in place using the included mounting screws.
- 6.Install the bulb (but not included) as illustrated, turning it clockwise until fully tightened.
- 7.Use the included hole plugs to cover any pre-drilled openings at the base of the fixture.

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not alter the plug.

Specifications:

- Input Voltage: 120VAC 60Hz
- Socket Type: Standard Medium E26
- Max.Load Power: Incandescent Bulb 60W、 LED Bulb 12W

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.

