


INSTRUCTIONS

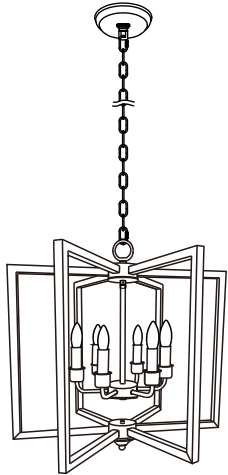

CAUTION RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

ASSEMBLY & INSTALLATION GUIDE

ITEMS YOU NEED

- a. Ladder
- b. Screwdriver
- c. Wire cutter/stripper
- d. Insulation tape

①

Step1.

- 1.Remove the **A** from **C** by loosening CIRCLE RING from **A**.
- 2.Then secure **A** to ceiling junction box by **B**.

②

Step2.

1. Firstly, unscrew the CHAIN LOOP and PLATE from **E** and take apart them.
Next, Clamp the thread pipes exposed by **I** into the holes of **E**.
Then use Washers and Nuts to tighten the thread pipes by wrench.
- 2.Firstly, unscrew the ROUND NUT and PLATE from **H** and take apart them.
Next, Clamp the thread pipes exposed by **I** into the holes of **H**.
Then use Washers and Nuts to tighten the thread pipes by wrench.
- 3.Make the fixture wire through the hole of **E**, **D** and **C**. Then screw the **F** to **G** and **E**.
- 4.Coonect lamp fixture and **A** with **D**.

③

Step3.

1. Connect black fixture wire to black supply wire and white fixture wire to white supply wire using wire caps(provided).Warp connection with electrical tape.
- 2.Connect ground wire from canopy with ground wire from junction box using a wire cap .Wrap with electrical tape for a more secure connection. If house does not have ground wire, attach grounding wire to green grounding screw marked GND.
- 3.Tuck all wires carefully into the J-Box.

④

Step4.

Position **C** over **A** and tighten with CIRCLE RING.