


RAVELLO

LOUNGE HEATER

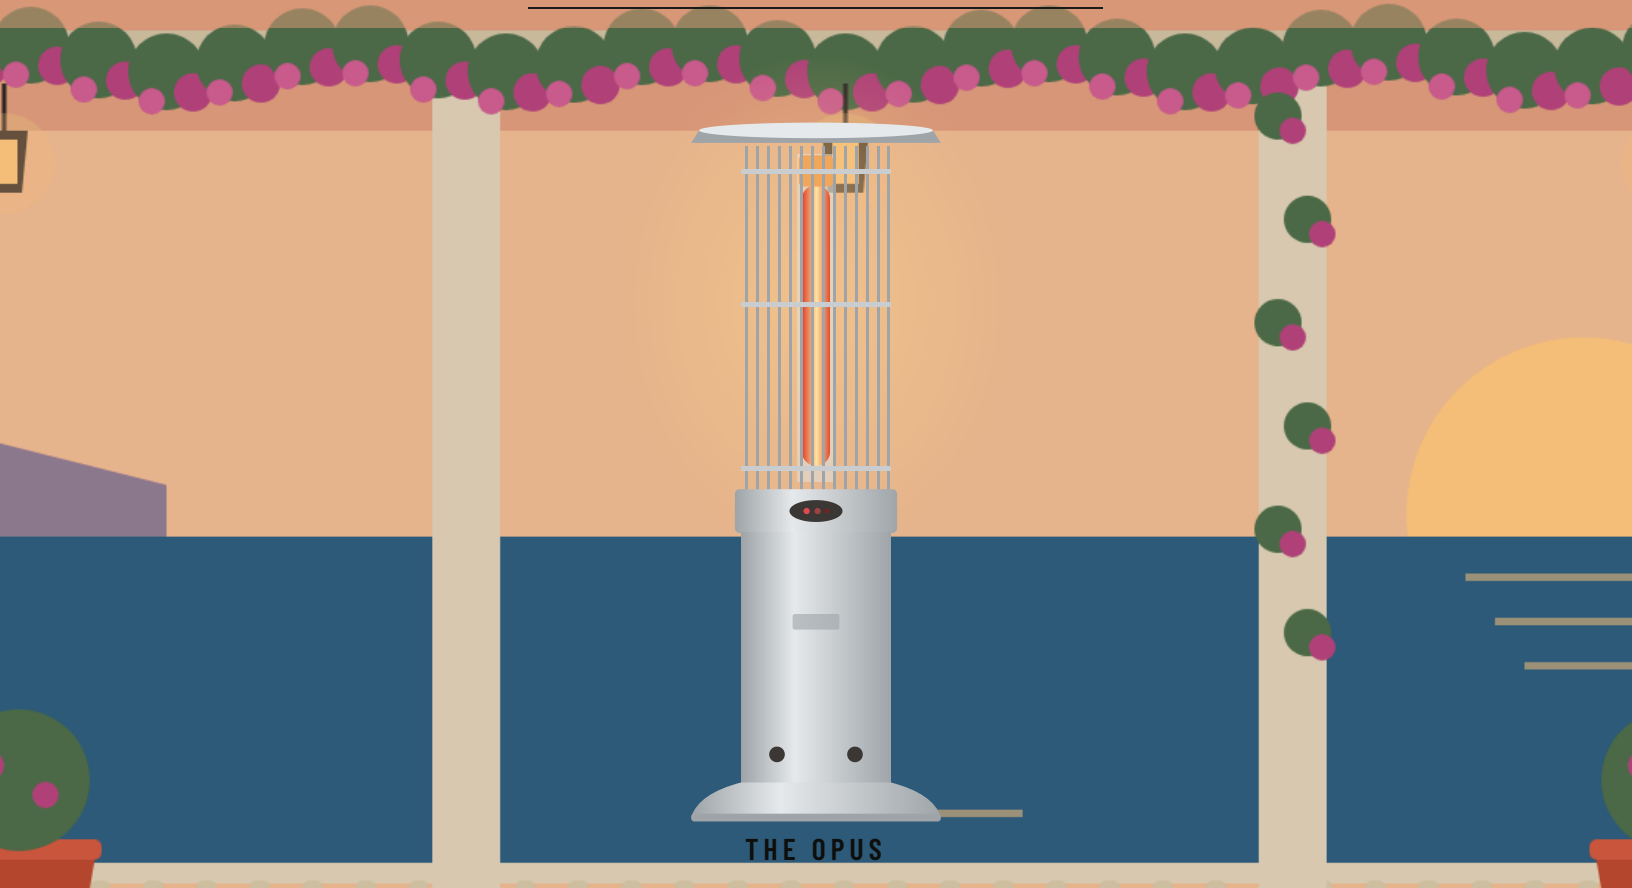

QUICK START GUIDE • THE OPUS • RAVELLO LOUNGE COLLECTION

Your first evening.

Una sera a Ravello — six steps, one sunset.

17:00	17:15	18:00	18:15	18:30	23:00
<i>Arrivo</i>	<i>Il Gas</i>	<i>La Prova</i>	<i>Accensione</i>	<i>Il Calore</i>	<i>Buonanotte</i>

About 10 minutes • Phillips screwdriver and the wrench supplied.

You'll need a 20 lb propane cylinder (not included). The remote takes 2 × AAA.


**READ YOUR OWNER'S MANUAL
FIRST**

17:00*Arrivo*

STEP 1

Unpack and set up your Opus


- The glass tube travels wrapped. Remove **one protective guard** (four screws), take out all the bubble wrap and foam around the glass, then hang the guard back on its slots and refit all four screws.
- Fit the **wheel kit** to the base plate with the two bolts and two M8 nuts, tightened with the wrench supplied.
- Stand it outdoors on hard, level ground: 36 in clear on every side and 36 in above, away from windows, air intakes and sprinklers. Wind under 10 mph.

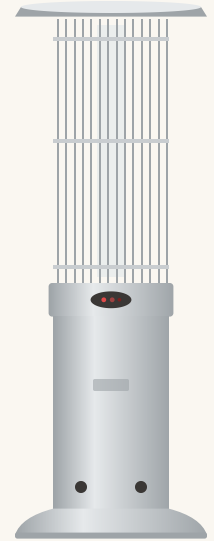**17:15***Il Gas*

STEP 2

Connect the fuel

- **Propane only.** Stand a standard **20 lb cylinder** upright in the base with the cylinder valve closed.
- Connect the supplied **hose and regulator** to the cylinder valve, hand-tight. Route the hose so it never touches a hot surface.
- Check the hose for cuts or wear before each use. A damaged hose must be replaced before you light the heater.

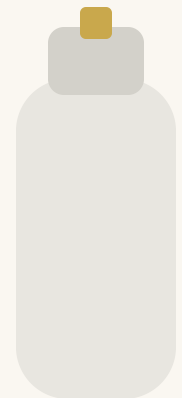

20 lb · propane only

18:00*La Prova*

STEP 3

Test every connection

- Mix **1 part dish soap to 3 parts water**. With the heater OFF, open the cylinder valve.
- Brush or spray it on every connection: cylinder, regulator and both hose ends. **Growing bubbles mean a leak:** close the valve, re-tighten, test again.
- Still bubbling? Don't use the heater; call us. Never test with a flame. Repeat at every cylinder change.

18:15

Accensione

STEP 4

Light the Opus

- Open the cylinder valve. **The first time, use the control unit, not the remote.**
- **Press POWER for 2 seconds, release, then press again** to start ignition. The 2-second hold is a safety lock, not a fault.
- New cylinder? Allow **about a minute** for air to clear the line; the first lighting may take several tries. After that the remote works too: POWER, 2 seconds, release, press again.



POWER · HOLD 2 s



REMOTE · 2 × AAA


18:30

Il Calore

STEP 5

Set the warmth

- On the control unit, each press of POWER steps **MAX → MED → LOW → OFF**. On the remote, use **UP and DOWN**.
- A healthy flame fills about **two-thirds of the glass at MAX** and one-third at LOW: steady, bright, blue with straight yellow tips. No noise, no black smoke.
- Too much yellow flame or smoke? Turn it off and see Troubleshooting in your Owner's Manual. It runs less efficiently below 40°F.

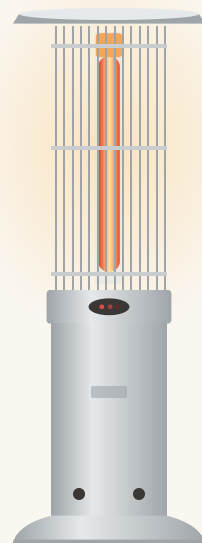

23:00

Buonanotte

STEP 6

Shut down

- Press **POWER until it reaches OFF**, on the unit or the remote.
- **Close the cylinder valve.** Between uses, disconnect the cylinder.
- Let it cool for **45 minutes** before touching, moving or covering. The reflector stays hot. Relighting? Wait 5 minutes first.

SAFETY FIRST, ALWAYS

If you smell gas

1. Shut off the gas at the cylinder valve.
2. Extinguish any open flame.
3. If the odor continues, move away and call your gas supplier or fire department from a safe place.

OUTDOOR USE ONLY

Never use inside a home, garage, tent, vehicle or any enclosed space. Carbon monoxide can kill.

La Cura *care through the seasons*

THE FINISH

Once cool, a soft cloth with warm soapy water. No abrasive pads, solvents or pressure washers. Car wax on the body keeps it bright; never on the glass or reflector. Near the sea, check often for corrosion.

HOSE & PASSAGES

Each season, check the hose for cracks and clear spiders and insects from the burner and orifices with a pipe cleaner and compressed air.

GLASS & CONTROLS

Keep the burner, pilot and control valve dry. If the gas control is ever submerged, don't use it. To clean the glass tube, remove a guard as in Step 1.

COVER & STORE

Cover once cool and store upright, sheltered from rain and snow. For long storage, disconnect the cylinder and keep it outdoors.

LIFETIME FRAME · 5 YEARS PARTS · 5 YEARS FINISH · 1 YEAR BURNER

Parts only; labor and freight not included. Full terms at lavaheat.com/warranty-and-product-care



WE'RE HERE TO HELP

customerservice@lavaheat.com · 310-559-1700

lavaheat.com/troubleshooting

Lava Heat Italia · 940 W. Washington Blvd., Los Angeles, CA
90015 · Est. 2001

*Buona
serata.*