

Combine the frames:
Fix the lamp frames into the top plate hole with screw tubes.
The screw tubes are in the accessory bag on the back of the top plate.

(Figure 3)

Connecting Terminal
(In Put Voltage 110-265V)


Brown Wire or black wire (L):
connect with live wire

Signal receiving line

Terminal Block
(any holes can be plugged)

Power wire

Blue Wire or white wire (N) :
connect with neutral wire

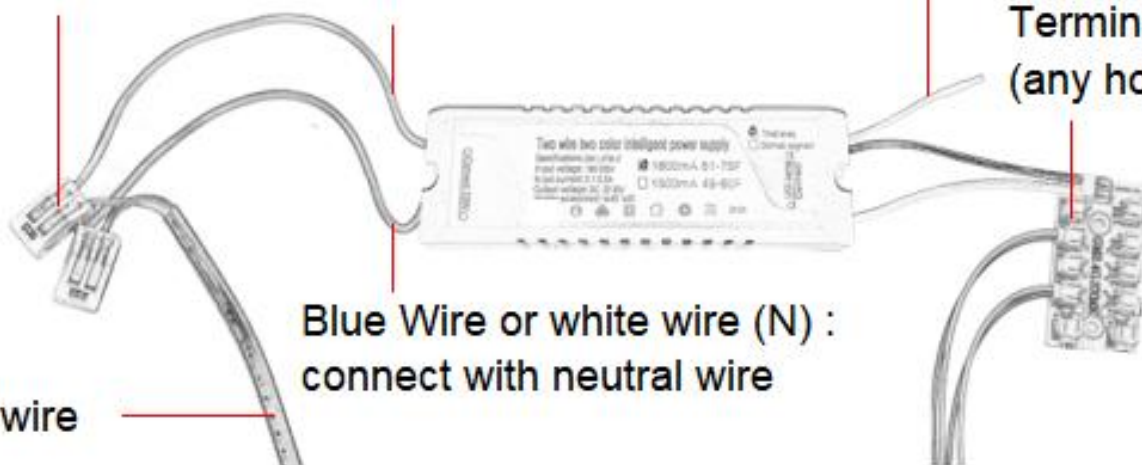

(Figure 4: Plug and Driver)