Installation Steps:

①



1. Turn off the power.

②

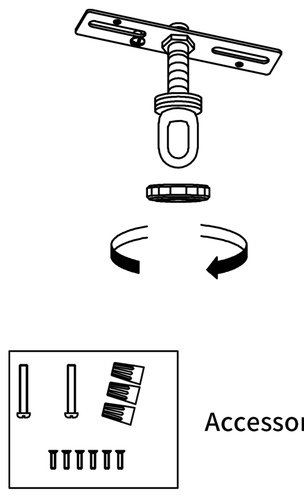

2. Unscrew the hanging ring (E).

③

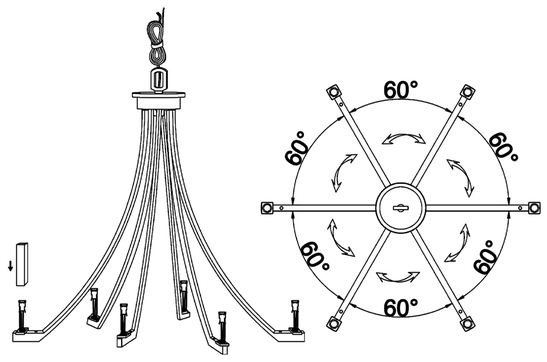

3. Divide the folding light frame (K) into six equal parts, each at an angle of 60°, and the sleeve is sleeved on the lamp head

④

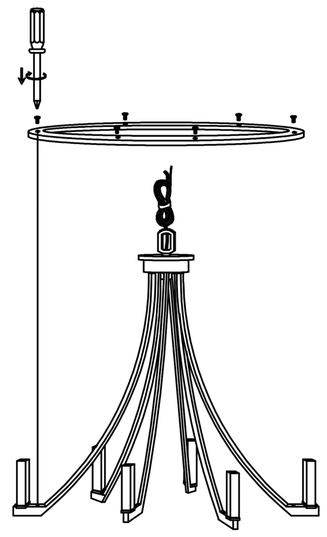

4. Put the iron ring (J) down from above and set it on the light frame (K). Each hole on the iron ring (J) should be aligned with the hole on the light frame (K) accordingly, then use the machine wire (I) to fix the frame with the hole first, and then tighten the machine wire (I) with a screwdriver.

⑤

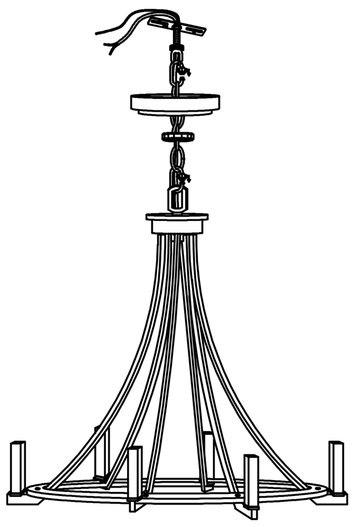

5. Pass the power cord on the light frame (K) through the middle of the hanging chain (H) and tighten the movable buckle (G) under the chain. Put in the accessories (E) from top to bottom, then put in the disc (F), and finally fasten the accessories (D) to the movable buckle (G) above the hanging chain and tighten it, and the extra power cord will come out from the accessories (D).

⑥

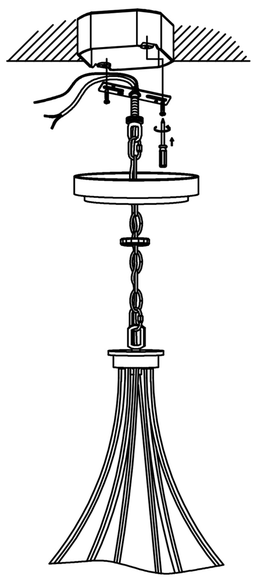

6. Lift the whole light upward, screw the accessories (D) and junction box (A) together with two machine wires (B), and finally tighten the machine wires (B) with a screwdriver, and the installation of the pegboard is completed.

⑦

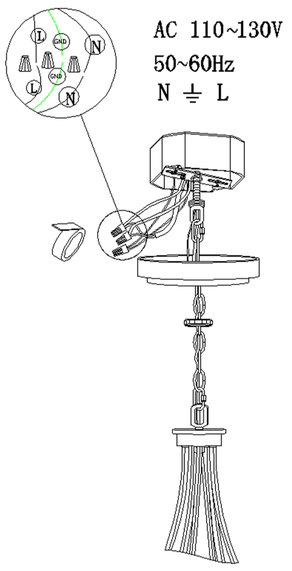

7. The positive, negative and ground wires correspond and connect with the power line, and wrap the terminal cap (C) with adhesive tape.

⑧

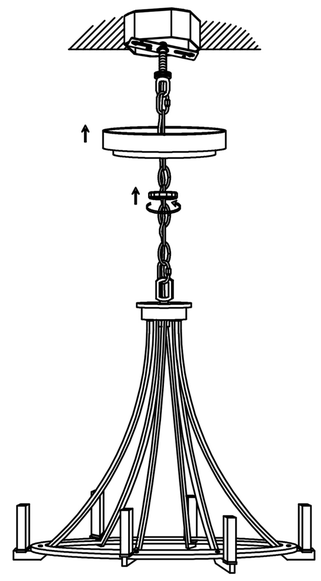

8. Put the disc (F) against the ceiling, tighten the accessories (E) until the accessories (E) press the disc (F). The light stand assembly is complete.

⑨

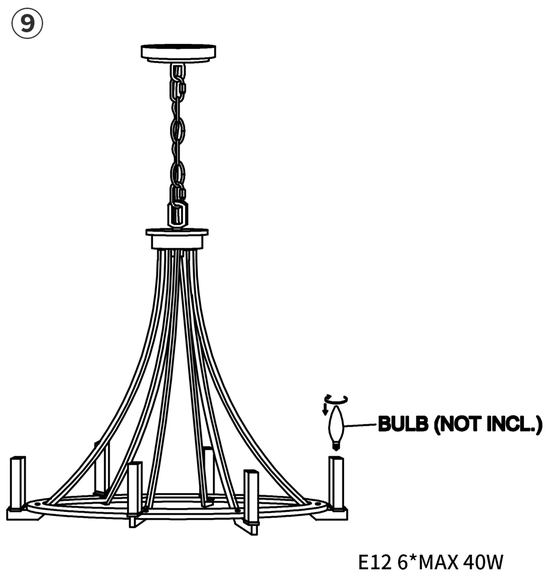

9. Install the light bulb.

⑩

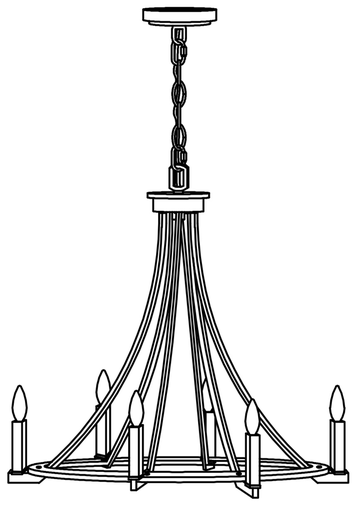

10. Installation is complete, turn on the light.

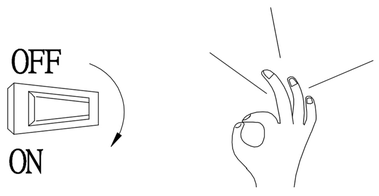

Notice: This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect items and contents carefully. If any damage or defect is found, do not install it.

Accessories:

A: Junction box*0
B: Inch cross coil head machine wire*2
C: Wiring cap*3
D: A word hanging plate + hanging ring *1
E: Hanging ring *1
F: Disc*1
G: Movable buckle*2
H: Hanging chain*1
I: Cross countersunk machine wire *6
J: Iron ring*1
K: Lamp holder*1
L: Light bulb*0
M: Square casing*6