



Curved Head Security Light

Model No. ES06508V

INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

! IMPORTANT SAFETY OPERATING INSTRUCTIONS

1. Please read all warning and instruction before attempting to install this light.
2. Disconnect power before installing or servicing.

! WARNING

Risk of electrical shock

1. Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
2. Make sure all electrical and grounded connections are in accordance with the National Electrical Code and applicable local code requirements.
3. All wiring connections should be compliant with UL standard.

Risk of injury

1. Wear gloves and safety glasses at all times when moving luminaire from carton, installing, servicing or performing maintenance.
2. Avoid direct eye exposure to the light source while it is on as this may cause irreparable damage to the eyes.
3. Account for small parts and destroy packing material, as these may be hazardous to children.

Risk of burn

1. Allow fixture to cool before touch.
2. Do not exceed maximum wattage marked on luminaire label.

Attention: lights must be installed by an experienced household wire installer or a qualified electrician, Electrical system and the electrical connection method of light fixture must conform to the national electrical standards and specification requirements of the local architecture.

FCC

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.









Curved Head Security Light

Model No. ES06508V

INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

REF. PARTS


																	
A			B			C			D			E			F		
A	Light fixture	1PC	B	Mounting bar	1PC	C	EVA gasket	1PC	D	Mounting bracket screw	1PC	E	Mounting screw	6PCS (3groups)	F	Wire nut	3PCS

PARAMETER:

1. Illumination output: approx. 1600 lumens / 5000K
2. Wattage: 18W
3. Power source: AC120V/60Hz
4. Detect range: up to 40feet (12m), 180 degree

HOW TO INSTALL

1. Install the mounting bar to the outlet box with the stamped word "FRONT" facing away from the outlet box, use two mounting screws that best fit the outlet box.
(Choose one group of suitable mounting screws among three groups in the hardware pack)
Note: For the best performance, install fixture at 8 feet ~12 feet (2.4~3.6m) above the ground.
2. Unscrew ball nuts on the light fixture in order to remove the mounting bracket on the back of the light fixture
Thread fixture wires through gasket, and then attach the gasket to the back of mounting bracket
3. Connect the source wires from the outlet box with the power supply wire of light fixture using wire nuts as follows:
Connect the white wire to white
Connect the black wire to black
Note: DO NOT connect electricity before installation and maintenance
4. Place mounting bracket against the outlet box, insert the mounting bracket screw through the mounting bracket hole, thread mounting bracket screw into the center hole of the mounting bar. Tighten the mounting bracket screw securely.
Note: The "UP" arrow must point upward.
5. Attach the back plate of the light fixture to the mounting bracket; secure it with the ball nuts
6. Use silicone caulking compound, caulk completely around where the mounting bracket meets the wall surface to prevent water from seeping into the outlet box.

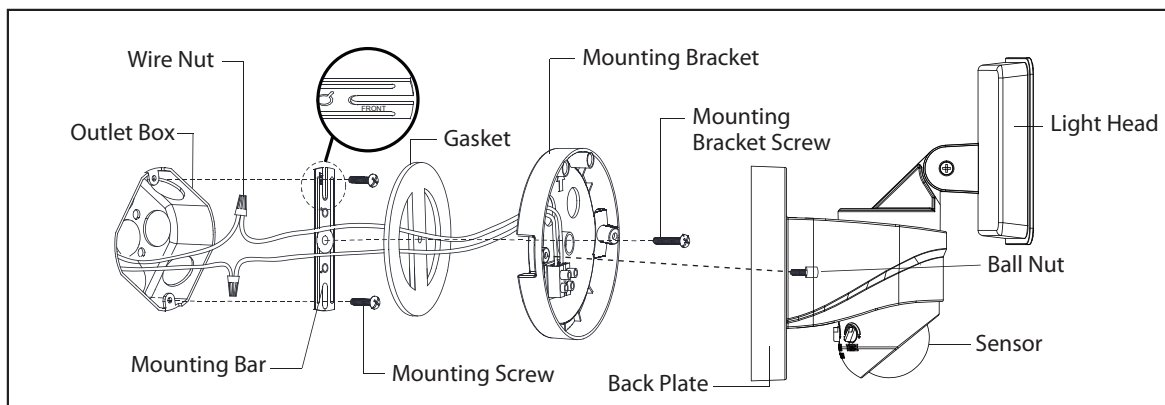



Curved Head Security Light

Model No. ES06508V


INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

HOW IT WORKS


Adjusting the lamp heads and motion sensor

- Swing the lamp heads horizontal or vertical to adjust the light coverage area.
Note: Keep the light head 30 degrees below horizontal to avoid water damage and electrical shock
- Gently grasp the motion sensor and rotate it horizontal so the controls are facing mounting bracket and two dots are in alignment.

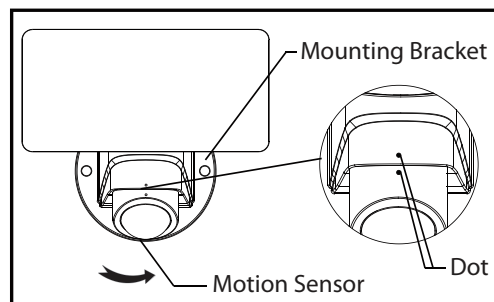

Product Function Description

- LUX is adjustable, by rotating the "LUX" knob clockwise, the corresponding light intensity value is larger, and vice versa
- MOTION SENSITIVITY is adjustable, by rotating the "SENS" knob. Walk through the detection zone at the farthest distance you wish to detect motion.
Note: Approximate range for each setting from 9feet to 40feet
- STAND-BY time is adjustable (5s ~ 3minutes), by rotating the "TIME" knob clockwise, the corresponding delay time is longer, and vice versa
Note: Set the "LUX" knob in " * " mode to test lighting and sensitivity
- MANUAL OVERRIDE the motion sensor continuous on at night. The light will turn off automatically at dawn.
 - To turn manual override on, turn the wall switch "OFF", then turn it "ON" within 3 seconds, the light will remain on all night long.
 - To turn manual override off, turn the wall switch "OFF", then turn it "ON" within 3 seconds again, the light will reset to motion sensor mode.

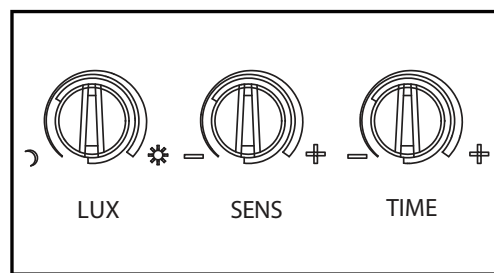

CLEANING AND MAINTENANCE

- Clean periodically with soft cloth.
- Do not use any cleaners with chemicals, solvents or harsh abrasives on this light. Do not use scouring pads, powders, steel wool or abrasive paper. They could cause deterioration of the finish.