

FT-244 Cirrus Garden Terrace Fountain



Pump Kit Parts List

PK120 pump (1)
#7 M-Series stopper (1)
Approx. 6" length of 1/2" Black Non-Kink tubing (1) **
1" length of 5/8" clear vinyl tubing (1) **
1" length of 1/2" PVC pipe (1) **
Adhesive Dots (4)
Hose clamps (1)*

*Hose clamps can be used as flow restrictors.

**Black non-kink tubing and clear vinyl tubing have been preassembled

FOUNTAIN INFORMATION:

This fountain holds approximately 1 gallon of water.

A fountain cover is not available for this fountain.

No refill device or submersible lights are suggested for this fountain

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

PES120 - 120 GPH Pump
5 FT cord length

- WINTER CARE -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

- GENERAL FOUNTAIN TIPS -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

All of our cast stone is proudly



Made in USA

Check out YouTube for a "How to" video.


For more Campania product information visit www.campaniainternational.com

FT-244 Cirrus Garden Terrace Fountain

Assemble your fountain on a level surface capable of holding a minimum of 50 pounds with an approximate 0.25 square foot footprint.



FT-243B (34 lbs)
16"W x 6.75"H

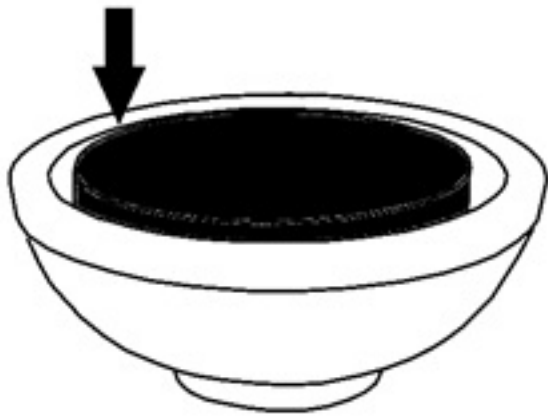

FT-244A (10 lbs)
12"W x 1.25"H

1. Position the basin (FT-243B) where the fountain is to be installed, ensuring that it is level.
2. Assemble the pump kit.
 - a. **NOTE: All pumps come with 1 adapter already inserted into the pump and 2 adapters secured to the power cord.**
 - i. **This fountain uses the largest adapter provided.**
 - b. Using a hose clamp, attach the 1/2" non-kink tubing to the pump outlet.
 - c. Place the stopper around the pump cord approximately 6 inches from the pump.
3. Feed the pump cord all the way through the hole and the channel in the basin (FT-243B) to ensure the fountain will be level.
 - a. Line up the split in the stopper with the direction that the channel under the basin goes.
4. **FIRMLY** press the stopper into the hole evenly.
5. Holding the water feature disc (FT-244A) over the basin (FT-243B), insert the PVC connected to the non-kink tubing into the PVC coupling protruding from the bottom of the disc.
6. Center the water feature (FT-244A) into basin (FT-243B).
7. Fill the fountain with water.