

## WARNING

**\*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN \*\***

\* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.

\* Inspect item carefully before attempting to install.

\* If there is any damages or obvious defects, do not install.

\* Item may not be returned once it has been installed.

## CARE AND MAINTENANCE

\* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

\* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

\* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

**Product Dimensions:21.5"x21.5"x26.5"-56.5"**

## NOTICE& IMPORTANT SAFETY INSTRUCTIONS

\* Please make sure that you have all parts indicated before you begin assembly of this item

















\* This item should be assembled on a soft surface to prevent scratching the finish during assembly


\* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation

\*The external flexible cable or cord of this lamp cannot be replaced

If the cord is damaged, the lamp shall be destroyed

## Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	J	Shade		1X
B	Wire Nut		3X	K	Bulb		3X
C	Mounting Screw Size:8/32*30mm		2X	L	Threaded tube		1X
D 1/D 2	Canopy Swivel		1X	M	Plastic washer		2X
E	Canopy Nut		2X	N	Diffuser		1X
F	Short tube		2X	O	Hex Nut		1X
G	Long tube		2X	P	Metal Cover		1X
H	Lower tube		1X	Q	Finial		1X

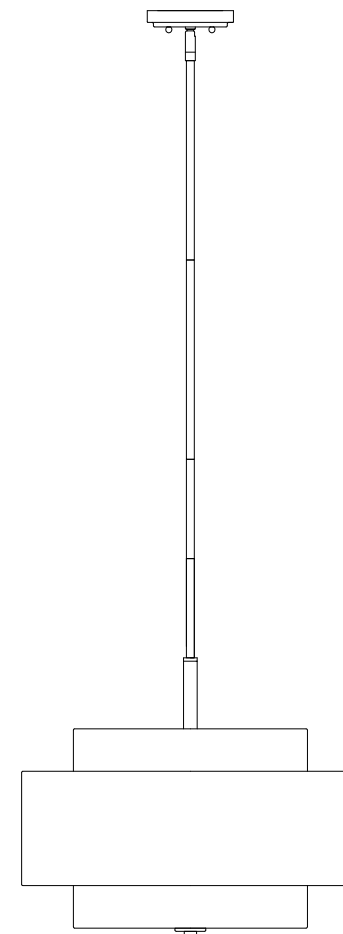


## PREPARATION

- \* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- \* If any part is missing or damaged, do not attempt to assemble the product.
- \* Estimated Assembly Time:30 minutes
- \* If you are having difficulty, our friendly Customer Care team is always here to help. Please email [customersupport@safavieh.com](mailto:customersupport@safavieh.com)


**NOTE:PLEASE USE TYPE"A" BULB MAX 40-WATT OR CFL MAX 13-WATT OR LED MAX 9W,THERE ARE 3\*9W LED BULBS IN THE BOX.**

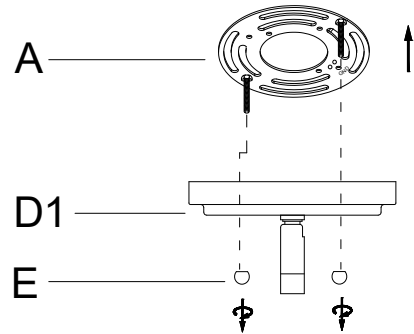


**Step 1:**Unpack all parts from cartons carefully.Separate the Mounting Plate(A) from the Canopy(D1) by removing the Canopy Nut(E) anti-clockwise.

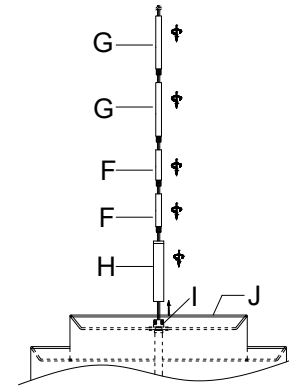



**Step 2:**Insert the power cord through Lower tube (H), Short tube (F) and Long tube (G) as desired length. Insert the Lower tube (H) into the center threaded portion (I) of the Shade(J) until tight. Rotate each tubes clockwise till tight.

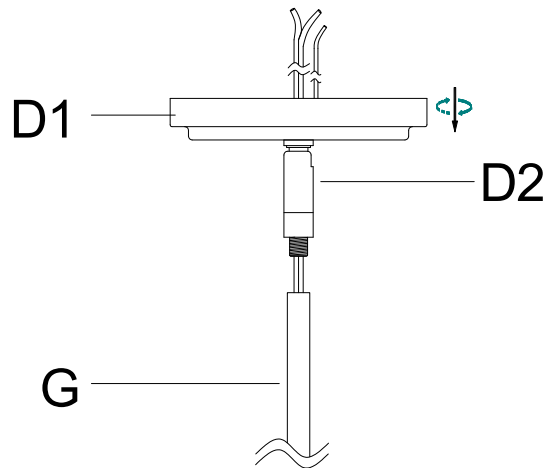

**Step 3:** Insert the Long tube(G) into the thread portion of the Swivel (D2) and the Canopy(D1), then cut off the extra cord so that 6" wires at least long within the outlet junction box.

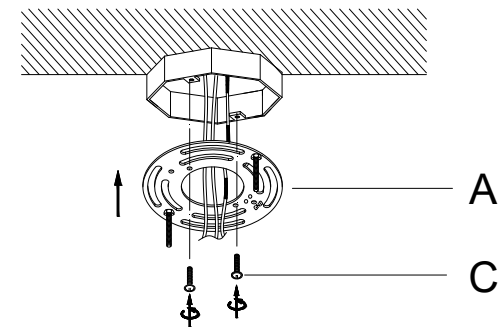

**Step 4:**Attach the Mounting Plate (A) to the ceiling junction box and secure it by tightening 2 Mounting Screws (C) with a screwdriver until secure.

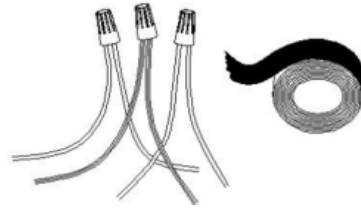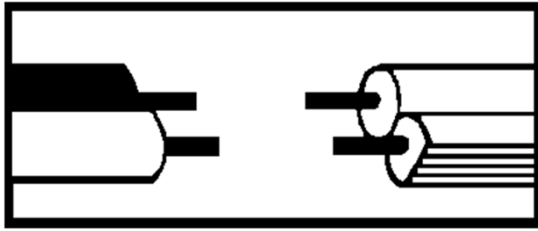


#### Step 4: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut. CAUTION: Do not reverse the hot and neutral connections

#### Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

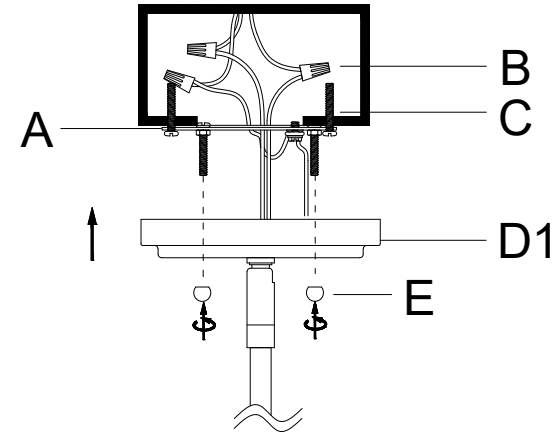

**Step 6:** Raise the Canopy (D1) over the Mounting Plate (A), making sure 2 Threaded Rods extend downwards through 2 holes on the Canopy (D1). Secure the Canopy (D1) by turning the Canopy Nuts (E) clockwise until tight.

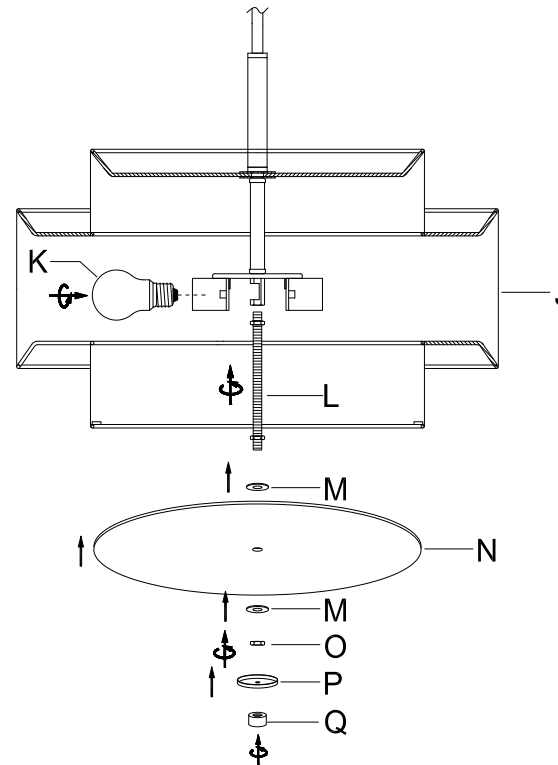

**Step 7:** Insert the bulbs(K) into the sockets until secure. DO NOT EXCEED THE SPECIFIED WATTAGE. Insert the Threaded tube (L) into the tube of the sockets assembly of Shade (J). Position 1 Plastic washer (M), then place the Diffuser (N) onto the threaded tube. Place another Plastic washer (M), fix it by turning the Hex Nut (O) clockwise till tight. Place the Metal Cover (P) through the threaded tube, fix the Metal Cover (P) in place by turning the Finial (Q) clockwise till tight.

Adjust the Swivel (D2) if the assembled lamp body is not straight.