
FRAMELESS LED MIRROR

With Backlit

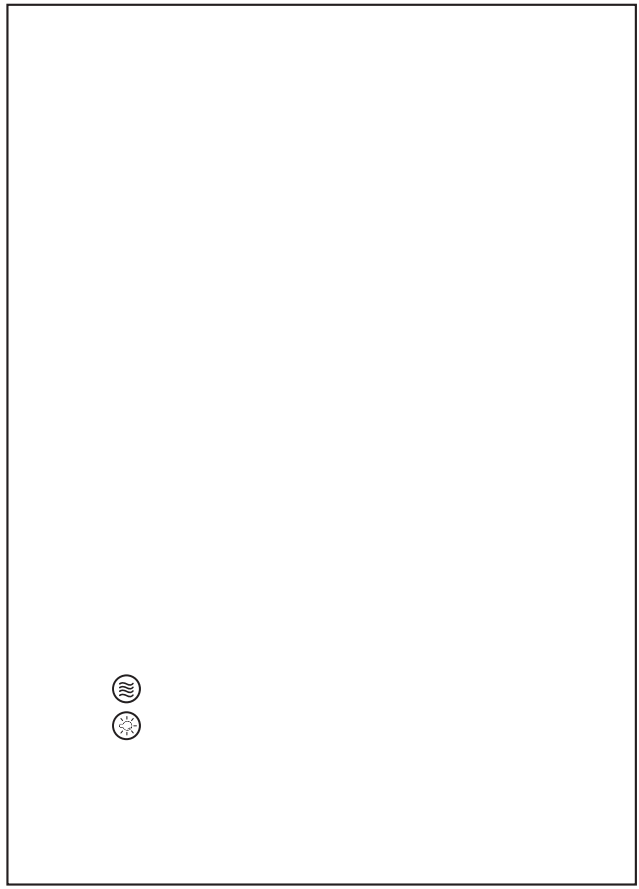

User Manual

Before Installation


Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.

Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V-120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

Please check and make sure below functions work properly before installation ⊕

Product Functions

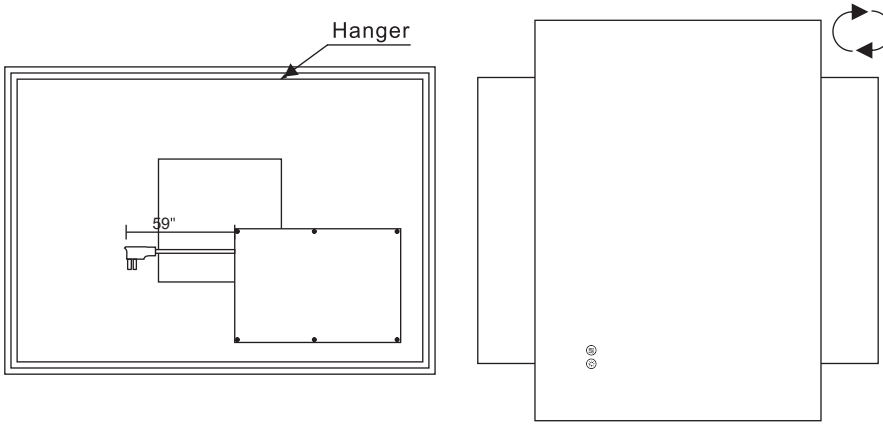

Horizontal/ Vertical Installation


Anti-Fog Switch: After connecting the power, the anti-fog function will automatically turn on, and it can be turned on or off freely by touching the button. The defogger will take effect within 10 minutes after it's turned on, so you can turn it on 10 minutes before taking a shower. If you forget to turn it off after showering, it will turn off automatically after 1 hour to save energy.


Light Switch: The back lights has three color temperatures that can be switched (3000K/warm, 4000K/natural, 6000K/white), and it also supports 10% to 100% brightness adjustment. You can short press the button to change the 3 color temperatures long press it to adjust the brightness steplessly, and your setting will be memorized, the next time restart, it will assume the previously used state.


Button Lighting Mode


State of Button Light	Meaning
White Light ON	Founction is Working
Blue Light ON	Function Standby
Light OFF	Power OFF


Package Contents


Bracket x2



Wall Anchors x4



Screws x4


Plug


LED Mirror

Installation tools you may need



Level


Pencil


Hammer



Safety Goggles


Electric Drill



Screwdriver


Tape Measure

SIZE 1

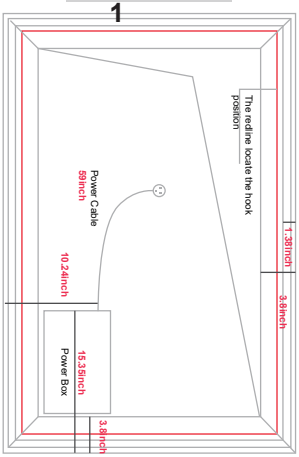

SIZE 2

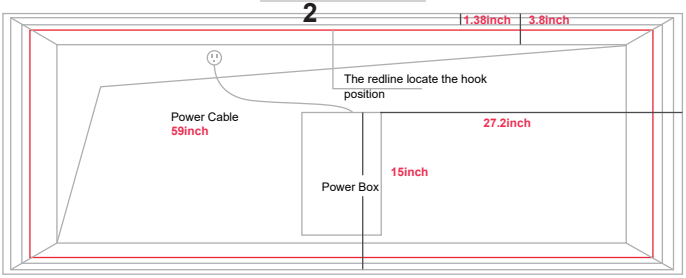

PS: The location of the button is located on the power box.

Product Specifications


Size	Thickness	Touch Button	LED Strip Mode	Color Temperature	Lumen	CRI	Life Span	Power (W)	Input Voltage(V)	Output Voltage(V)	Weight (LB)
28" X "20	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	1436	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	17.27
32" X "24	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	1772	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	22.35
36" X "24	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	1940	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	24.42
36" X "28	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2100	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	28.60
36" X "30	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2217	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	29.70
36" X "32	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2284	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	30.80
36" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2452	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	34.50
38" X "38	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2671	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	36.30
40" X "24	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2100	≥90 Ra	≥50000 hours	36	110V, 50/60HZ	24V	27.72
40" X "30	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2386	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	33.00
40" X "32	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2450	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	34.32
40" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2620	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	36.30
48" X "30	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2722	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	38.50
48" X "32	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	2789	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	40.30
48" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3007	≥90 Ra	≥50000 hours	48	110V, 50/60HZ	24V	45.10
48" X "40	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3125	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	50.16
55" X "30	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3007	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	45.63
55" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3296	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	51.70
60" X "28	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3125	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	49.81
60" X "30	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3209	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	51.26
60" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3461	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	56.10
60" X "40	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3578	≥90 Ra	≥50000 hours	60	110V, 50/60HZ	24V	60.06
72" X "32	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3839	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	63.73
72" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	3965	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	68.90
72" X "40	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4113	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	70.40
77" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4217	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	70.84
84" X "32	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4309	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	71.52
84" X "40	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4645	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	74.80
88" X "38	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4805	≥90 Ra	≥50000 hours	80	110V, 50/60HZ	24V	77.00
96" X "36	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	4998	≥90 Ra	≥50000 hours	100	110V, 50/60HZ	24V	85.80
110" X "40	1.14"	2	2835 3 colors 180LED	3000k/4000k /6000k	5813	≥90 Ra	≥50000 hours	100	110V, 50/60HZ	24V	120.00

Product Specifications

Parameter	Specification
Switch	Touch Sensor Switch
LED Color Change	Yes
LED Dimming	Yes
Memory	Yes
Anti-fog	Yes
Waterproof	IP54
LED POWER SUPPLY	**UL**
Glass Thickness	5 MM
Glass Material	Tempered Glass
Cable Length	1.5 M
Power Source	Hardwired / Plug in
Mounting Type	Wall Mounted
Mounting Method	French Cleat Mounting
Orientation	Horizontal / Vertical
Warranty	3-Year Manufacturer


Installation Instruction


Method 1: Plug in



Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.


Method 2: Hardwire






Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).

Step 1




Draw a straight line with a ruler to keep the mirror horizontal

Step 2




Use a electric drill to punch four holes at the marked spots.

Step 3

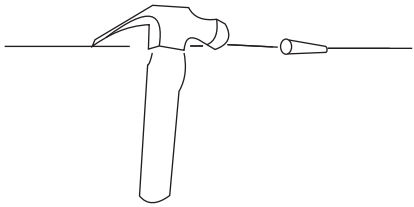


Apply wall anchors with hammer.

Step 4

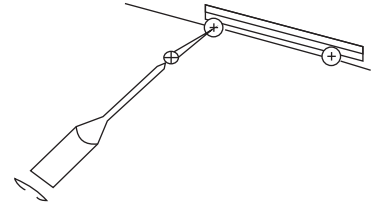


Use a screwdriver to screw the screws into the wall anchors.

Step 5



Hang the mirror on the wall

Step 6



Turn on the power.

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables).
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.

s