



ASSEMBLY GUIDE

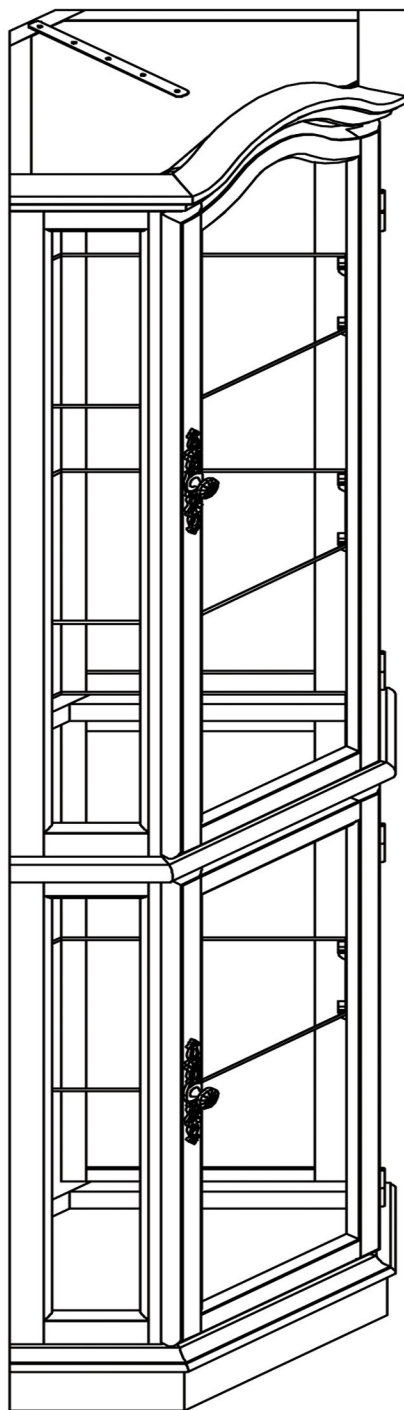

Note: This instruction booklet contains important safety information, please read and keep for future reference.


PARTS IDENTIFICATION

- Ensure that all parts and components are located before beginning assembly. Parts are labeled to help distinguish similar parts from each other. Use this PARTS IDENTIFICATION to help identify similar parts.
- Assemble on a soft surface to prevent damage to the product finish.
- Two people are needed for assembly.
- Estimated assembly time is approximately 1.5 hours.

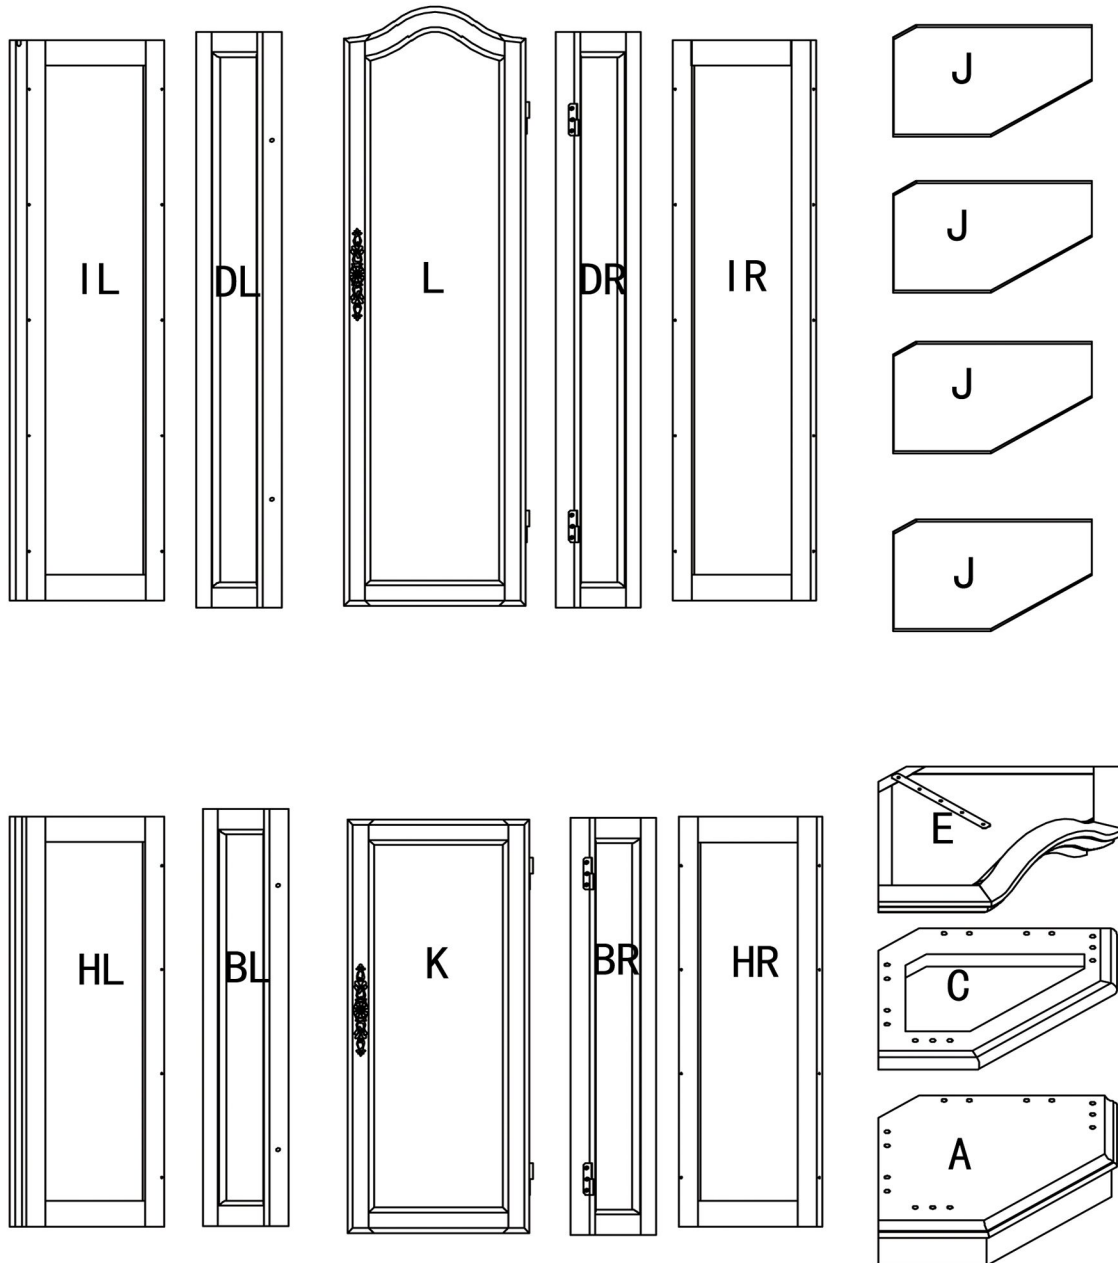


- | | | |
|------------------------------|-------------------------------|---------------------------|
| (A) BASE-1PC | (BL) LEFT PANEL-1PC | (BR) RIGHT PANEL-1PC |
| (C) SHELF BOARD-1PC | (DL)TOP LEFT PANEL-1PC | (DR) TOP RIGHT PANEL-1PC |
| (E) COVER BOARD-1PC | (J) SHELVES-4PCS | (HL) LEFT BACK PANEL -1PC |
| (HR)RIGHT BACK PANEL-1PC | (K) DOOR | (L) TOP DOOR |
| (IL) TOP LEFT BACK PANEL-1PC | (IR) TOP RIGHT BACK PANEL-1PC | |

HARDWARE IDENTIFICATION



TOOL REQUIRED




PHILLIPS HEAD
SCREWDRIVER




SHORT FLAT
SCREWDRIVER

(R1) LIGHT-1PC

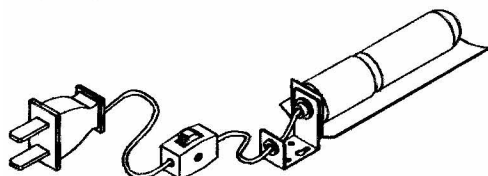

(R2) CAM BOLT-24PCS



(R3) CAM LOCK-24PCS



(R4) FLAT HEAD SCREW
ST2.9X15-5PCS




(R5) FLAT HEAD SCREW
ST2.9X25-20PCS




(R6) SHELF SUPPORT-15PCS



(R7) DOOR KNOB-2PCS




(R8) HINGE PILLAR-4PCS



(R9) ADJUSTABLE FOOT-5PCS





(R10) PLASTIC SCREW ANCHOR
-1PC



(R11) FLAT HEAD SCREW ST2.9X10-2PCS





CAM LOCK SYSTEM

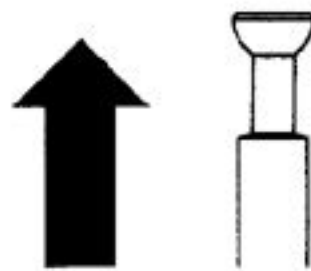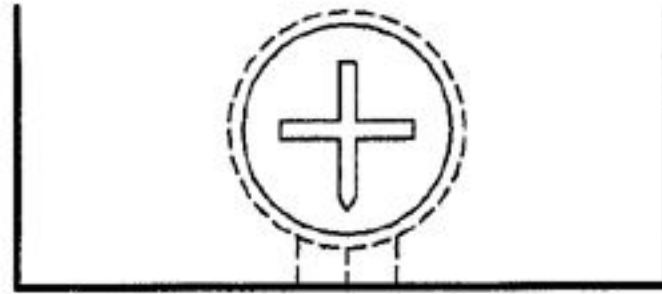

(1)

CORRECT

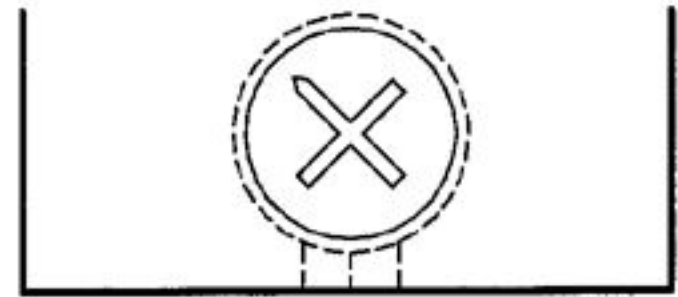
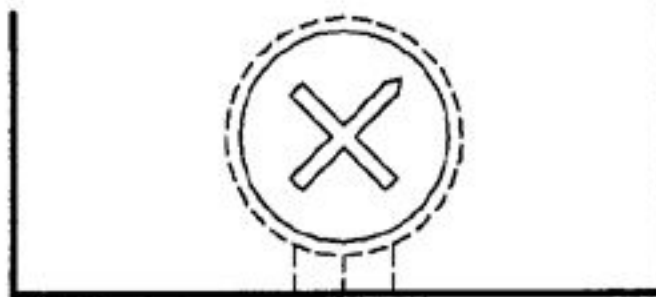


(2)


WRONG

Ensure starting position is correct, adjust cam bolt by pushing or pulling during assembly. Turn clockwise until secure.



R9=5





R11=2 R1=1

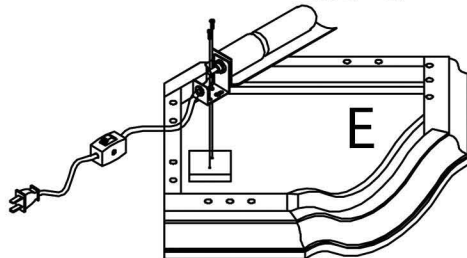



R2=6

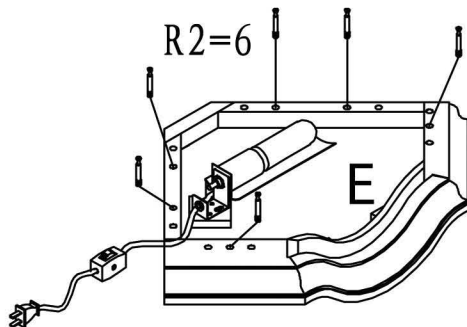


R2=12

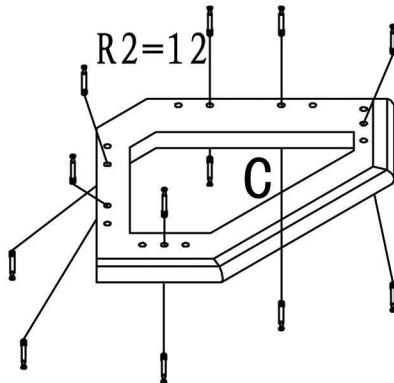

R2=6



(R1)LIGHT-1PC



(R2)CAM BOLT-24PCS



(R11)FLAT HEAD SCREW
(ST2.9X10)-2PCS





(R9)ADJUSTABLE FOOT-5PCS



1. a) Fasten 5 adjustable foot R9 to base A.

b) Fasten light R1 to cover board E using 2 flat head screw R4(ST2.9X15).




c) Fasten 24 cam bolt R4 to cover board E, both sides of shelf board C, base A.



(R3)CAM LOCK-6PCS



(R6)SHELF SUPPORT -5PCS

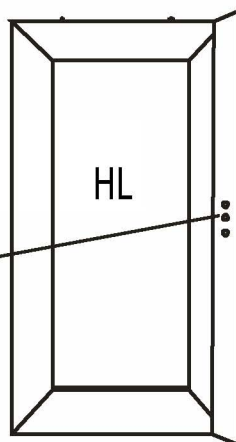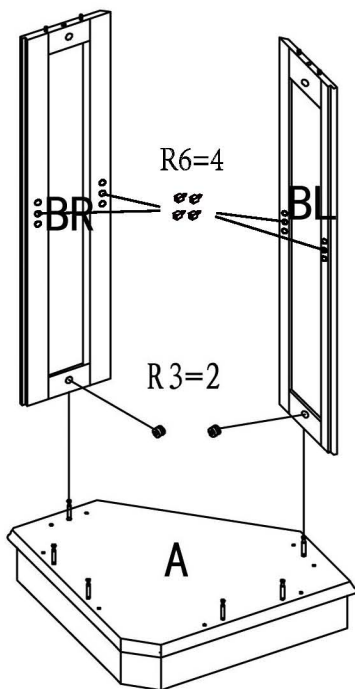



2.a)Fasten 4 shelf support R6 to left panel BL and right panel BR.

b)Fasten left panel BL, right panel BR to base A using 2 cam lock R3.

c)Fasten 1 shelf support R6 to left back panel HL.

d)Fasten left back panel HL, right back panel HR to base A using 4 cam lock R3.

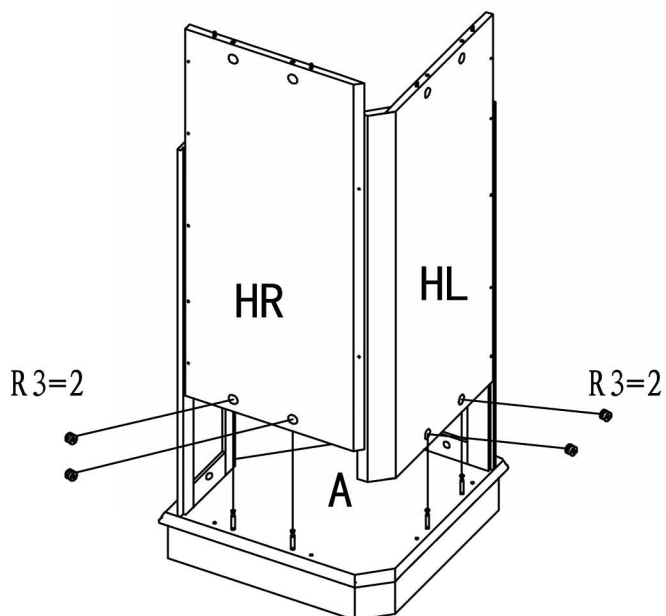

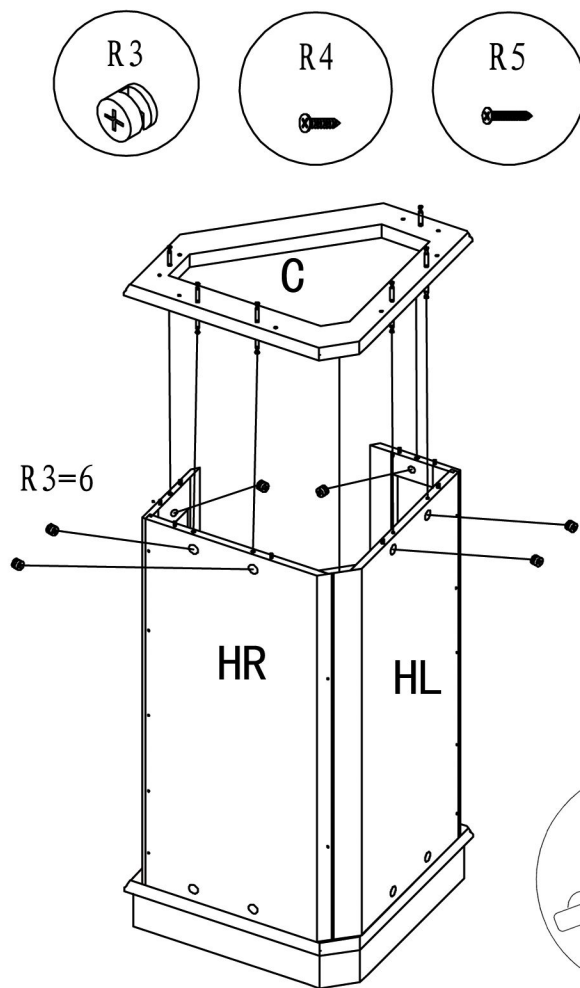

(R3) CAM LOCK-6PCS



(R4) FLAT HEAD SCREW
ST2.9X15-2PCS




(R5) FLAT HEAD SCREW
ST2.9X25-10PCS






3. a) Insert shelf board C into left panel BL, right panel BR, left back panel HL, right back panel HR, then fasten 6 cam lock R3.

b) Fasten left back panel HL to left panel BL, right back panel HR to right panel BR using 10 flat head screw R5 (ST2.9X25).

c) Fasten right back panel HR to left back panel HL using 2 flat head screw R4 (ST2.9X15).

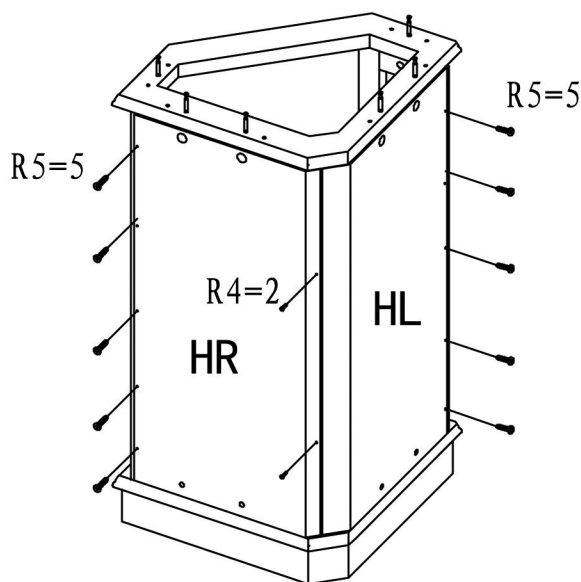


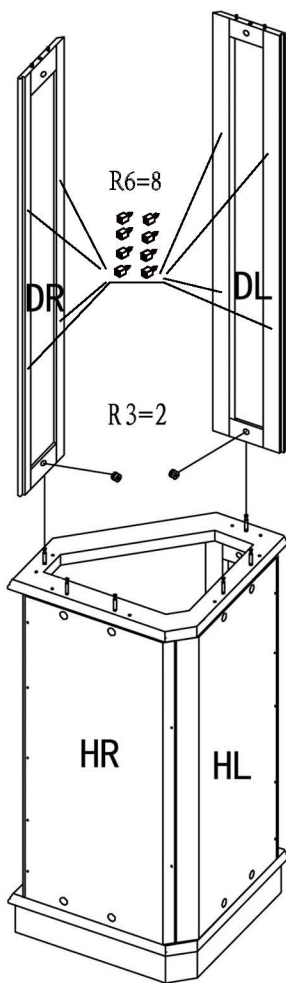

(R3)CAM LOCK-6PCS



(R6)SHELF SUPPORT -10PCS






4.a)Fasten 8 shelf support R6 to top left panel DL and top right panel DR.

b)Fasten top left panel DL, top right panel DR to shelf board C using 2 cam lock R3.


c)Fasten 2 shelf support R6 to top left back panel IL.

d)Fasten top left back panel IL, top right back panel IR to shelf board C using 4 cam lock R3.

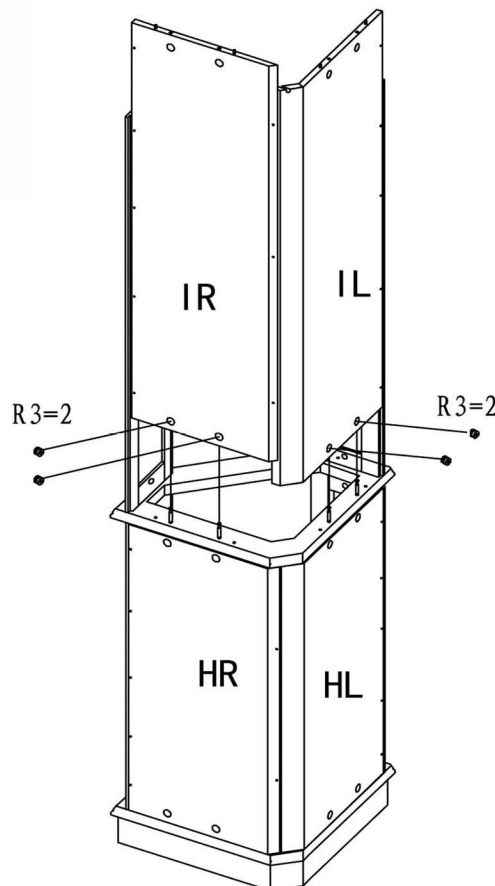
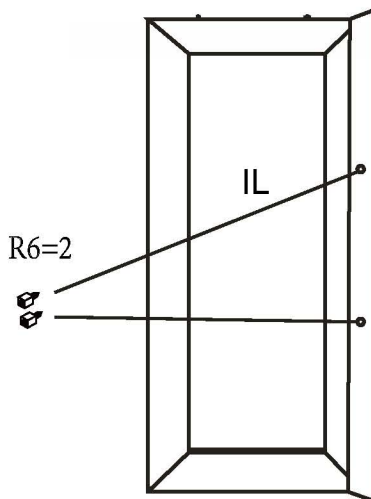




(R3)CAM LOCK-6PCS

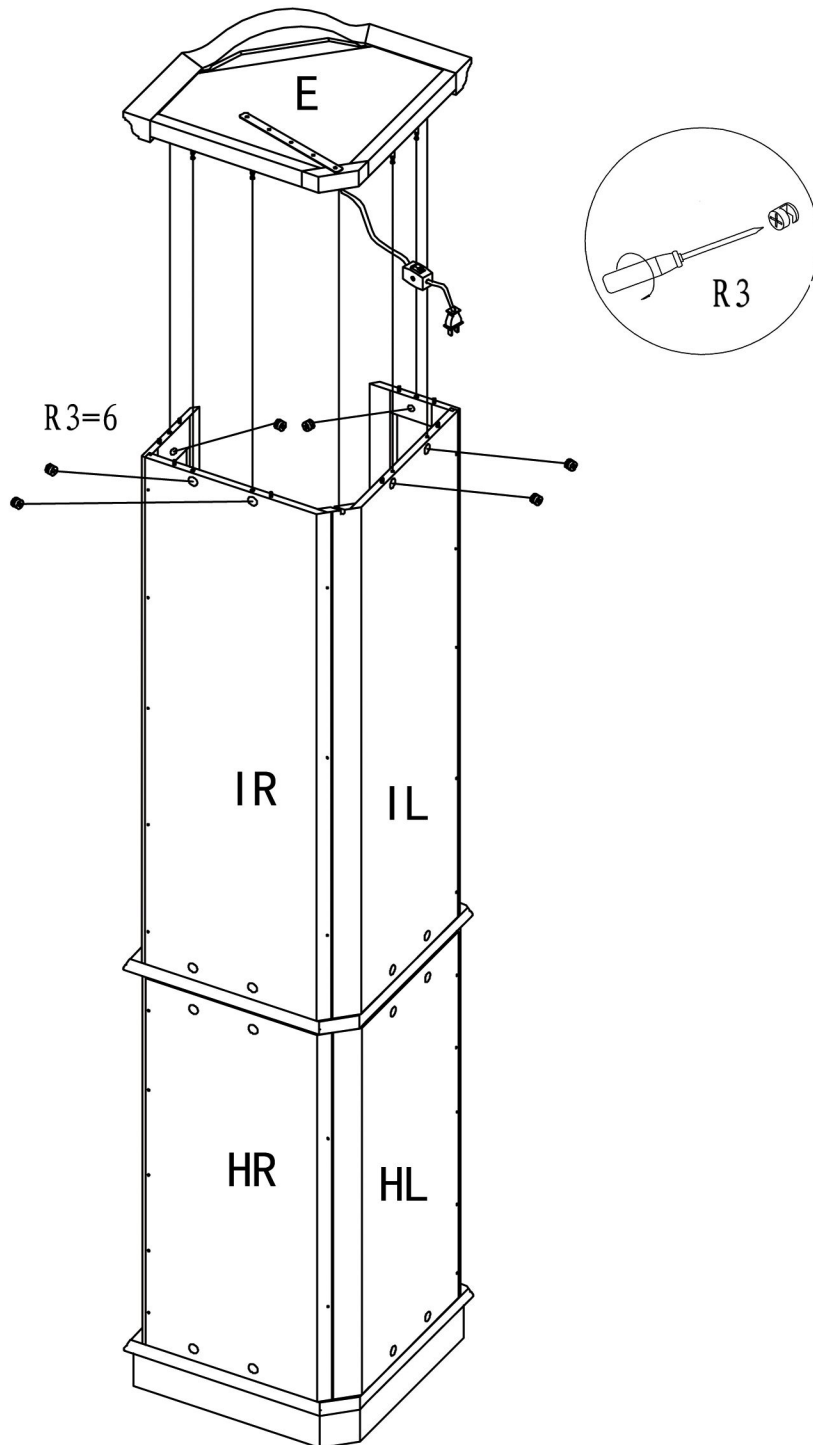



5. a) Insert cover board E to top left panel DL ,top right panel DR,top left back panel IL and top right back panel IR then fasten 6 cam lock R3.



(R4)FLAT HEAD SCREW
ST2.9X15-3PCS





(R5)FLAT HEAD SCREW
ST2.9X25-10PCS

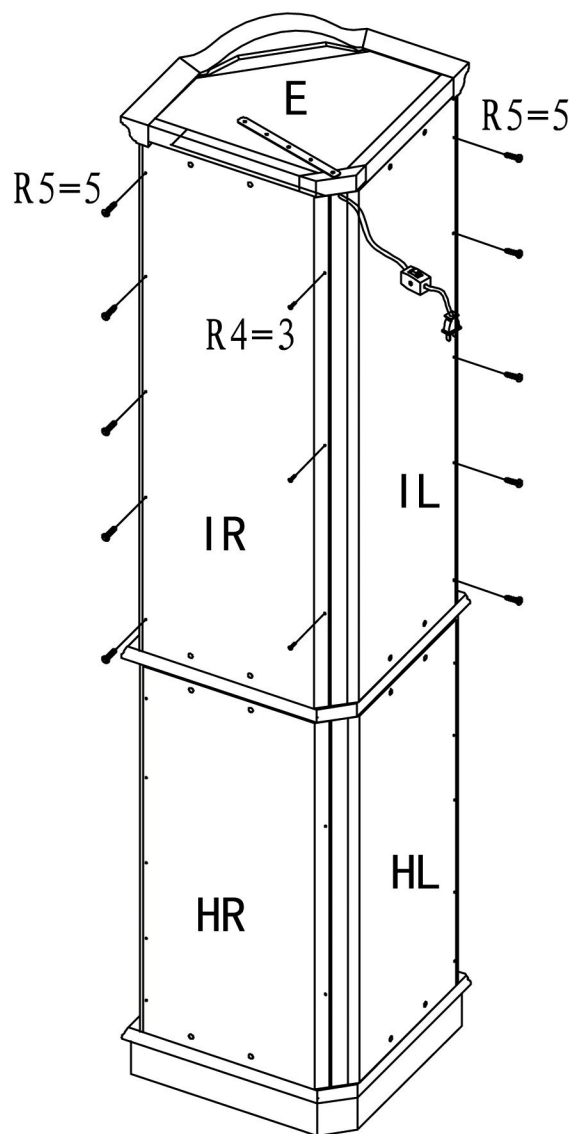

6. a)Fasten top left back panel IL
to top left panel DL,top right
back panel IR to top right
panel DR using 10 flat head
screw R5 (ST2.9X25).


c)Fasten top right back panel IR
to top left back panel IL
using 3 flat head screw R4
(ST2.9X15).

NOTE: the wire of light R1 should
get through from the hole
on left top back panel IL.

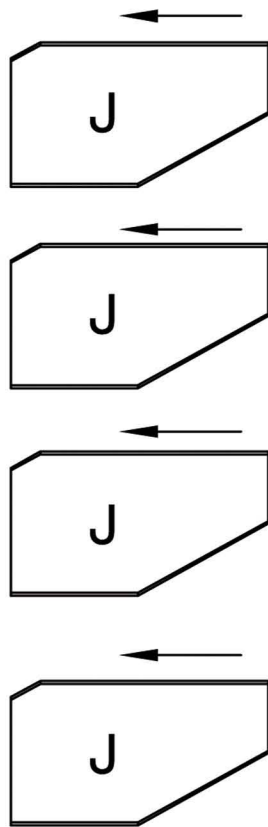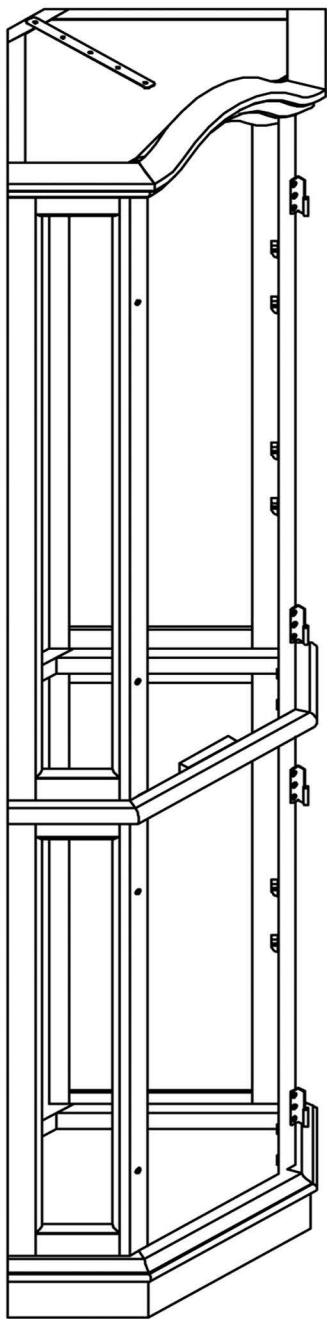

7.Put 4 shelf J on shelf support.


Note:Weight on glass shelves
should not exceed 5kgs.



(R7) DOOR KNOB-2PCS




(R8) HINGE PILLAR-4PCS

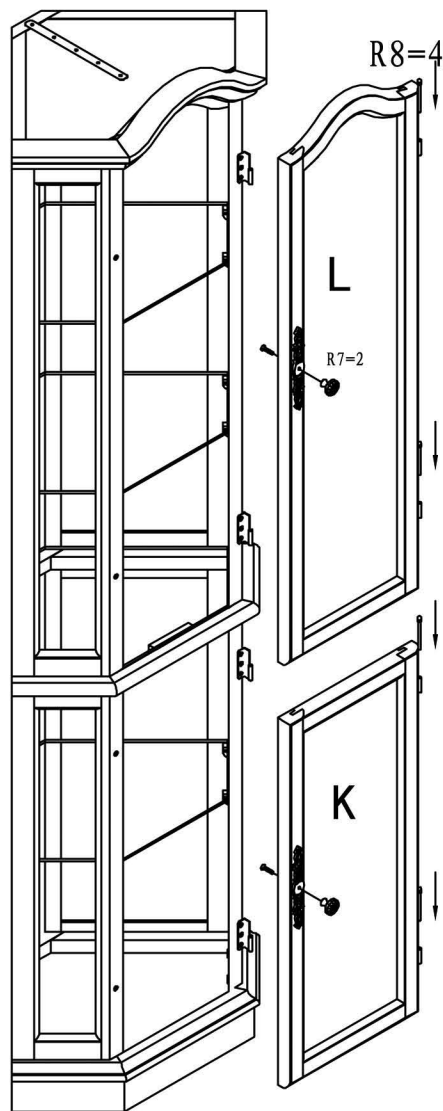



8. a) Attach door K to right panel BR, then insert 2 hinge pillar R8.

b) Attach top door L to top right panel DR, then insert 2 hinge pillar R8.

c) Fasten 2 door knob R7 to door K and top door L using 2 screws.



(R10) PLASTIC SCREW
ANCHOR-1PC

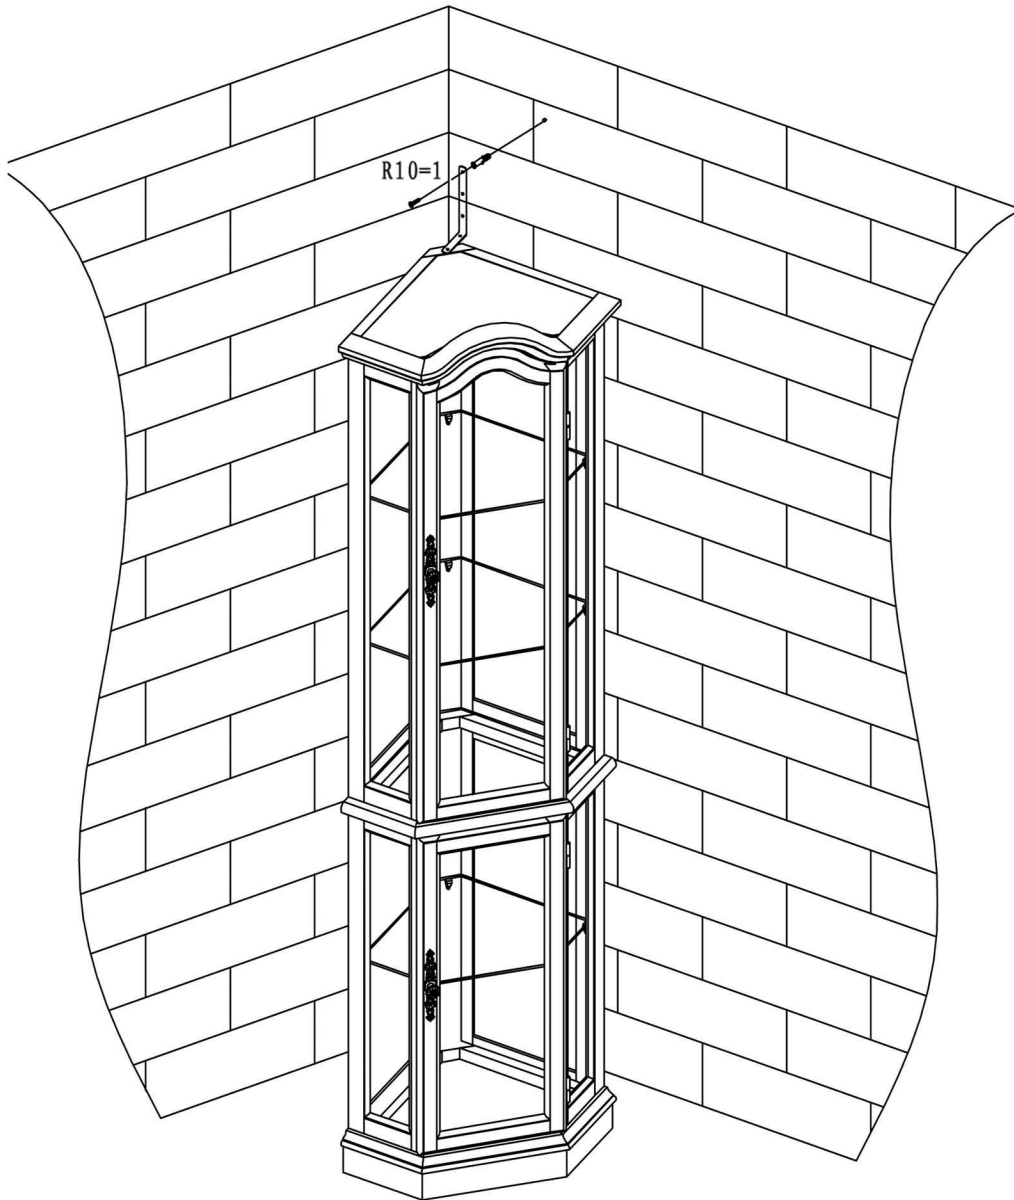

- 9.a) In order to ensure that the cabinet is stable, adjust the adjustable foot under the cabinet. As an added safety feature a support strap on cover board E has been provided. It must be attached to the wall using plastic screw anchor R10.

Care and Maintenance of your Furniture

- 1.Ensure metal plated hinges are kept dry to avoid rusting.
- 2.Please periodically check all fittings and re-tighten as necessary.
- 3.Wipe occasionally with a soft cloth slightly dampened with water.Then buff with a dry clean soft cloth.
- 4.Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or finishes to de-laminate.