
Grande Office Pod - 2 to 4 People





Our 2–4 Person Meeting Pod (Grande Model Sound Pod) is designed for comfortable two-person face-to-face meetings and can accommodate up to four users, making it ideal for both collaborative discussions and private work. With its sleek, modern design, this meeting pod also delivers high-performance acoustic insulation.

Grande Office Pod



Silent Space - Decibel Reduction as Its Core

Purpose-built for acoustic performance, ReframeSpace pods deliver superior sound reduction, speech privacy, and a calm interior experience through precision-engineered layered construction.

Sound Pod Design, Simplified

Precision-engineered construction streamlines installation, reduces assembly complexity, and delivers a seamless architectural finish with exceptional consistency.

Designed for Teams

Purpose-built for collaboration, ReframeSpace pod support quick, uninterrupted conversations while maximizing space efficiency through compact, thoughtfully engineered footprints.

Comfort & Privacy in Balance

Whisper-quiet ventilation maintains continuous airflow and all-day comfort within a calm, uninterrupted interior environment.



Grande Office Pod - Technical Specifications



1 Grade-A 30.9dB Sound Reduction

SGS Certified Acoustic Measurement of Speech level reduction. 30.9 dB, ISO 23351-2>2020(E)

2 Optimized Airflow for Comfort

Engineered for optimal airflow-delivering a fresh, comfortable environment without drafts or noise.

Silent Multi Fan efficient airflow without noise

3 Airflow

Dual fan air circulation moving up to 80 cfm x 2 (1min and 42s fo full circulation)

4 External Dimensions

L 2000 x W 1200 xH2300mm
L 78.7" x W 47.2" x H 91.7"
Additional Height with Casters: 3.15" /80 mm (H)

5 Mobility

Wheel Caster for ease of movement. Stationary mode support stand.Seismic Anchors Available upon request. Optional Internal & External Locks or lockless standard door handles

6 Stainless Steel Frame & Tempered Glass

Solid stainless steel provides uncompromising stability. Tempered Glass provides Strength & Clarity.

7 Internal Workspace

L 1837 x W 1040 x H 2030 m
mL72.3" x W 40.9" x H79.9

8 Electrical

Reliable Lighting- Traditional on/off switch for consistent control.

INPUT: USB-A/USB-C 5V 2.1A(1) 110v outlets, 10A*110v=1760W Ethernet Cable Opening

Total 18.4W energy consumption
OUTPUT:AC POWER OUTLET (Plug-n-Play Standard Wall Outlet) 85-265 VAC, 10A, 50-60Hz

9. 6 Precision-tuned layers

Superior Sound Absorption with a Fully Integrated 6-Layer Panel.

10 Product Weight

Weight:1074 lb / 487kg

11 Flexible Door Configurations

Dual Door Options- Lockable key or handle-only design included.

Colors



SR10002-4POD-WHT



SR10002-4POD-WH/GY




SR10002-4POD-WHT/NEW



SR10002-4POD-BLK/NEW

Product Diagram with Measurements

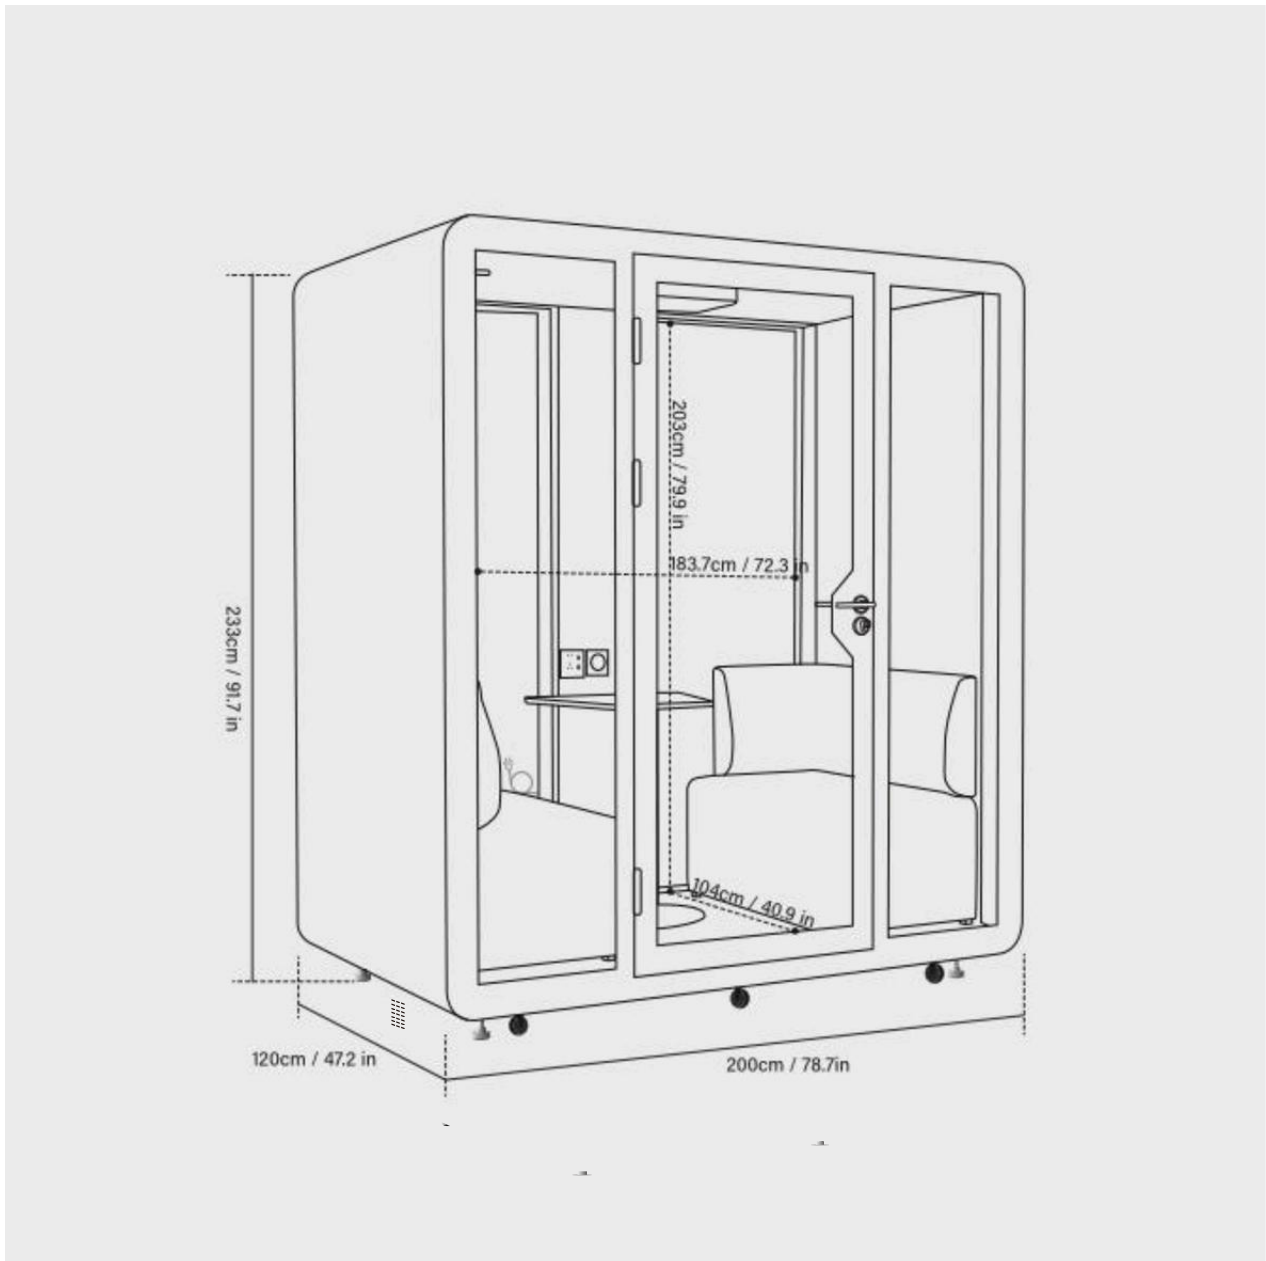

Performance

Built for Sustainability,
Built for Efficiency

- Speech level reduction: 30.9 dB
- Maximum airflow: 37 air changes per hour
- Minimal energy consumption: 53 W

The one-piece “one-side-one-panel” stainless-steel construction ensures long-lasting durability through multiple installations and reconfigurations, without missing parts or complicated fittings.

Integrated mobile casters allow easy movement and quick floor-space reconfiguration.

Built for the Long Run

The simplified “one-side-one-panel” design enables fast, cost-effective assembly and disassembly.

Simplified Design, Streamlined Manufacturing

Reduced supply-chain complexity and lower overall production costs deliver exceptional value, combining outstanding durability with high-performance engineering for long-term reliability.

Technical Specifications

Exterior Dimensions

- Exterior Size:
L 2000 × W 1200 × H 2300 mm
L 78.7" × W 47.2" × H 91.7"
- Additional Height with Casters:
3.15" / 80 mm (H)
- Door Size:
206 × 82.6 cm
81.1" × 32.5" (H × W)
- Doorway Opening (Clearance):
203.4 × 80 cm
80" × 31.5" (H × W)
- Door Swing Clearance:
Extends 24 cm / 9.4" beyond the existing panel
- Weight: 1074 lb / 487 kg

Interior Dimensions

Interior Dimensions



- Interior Size:
L 1837 × W 1040 × H 2030 mm
L 72.3" × W 40.9" × H 79.9"

Soundproofing

- Class-A Soundproofing
- Speech Level Reduction: 30.9 dB DS,A
- Measured in accordance with ISO 23351-1

Ventilation

- Maximum Airflow:
37 air changes per hour
80 CFM (134.4 m³/h)

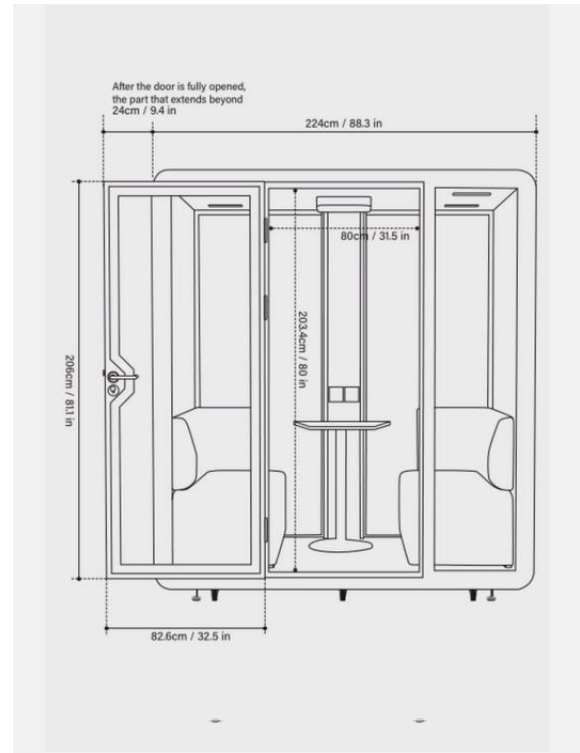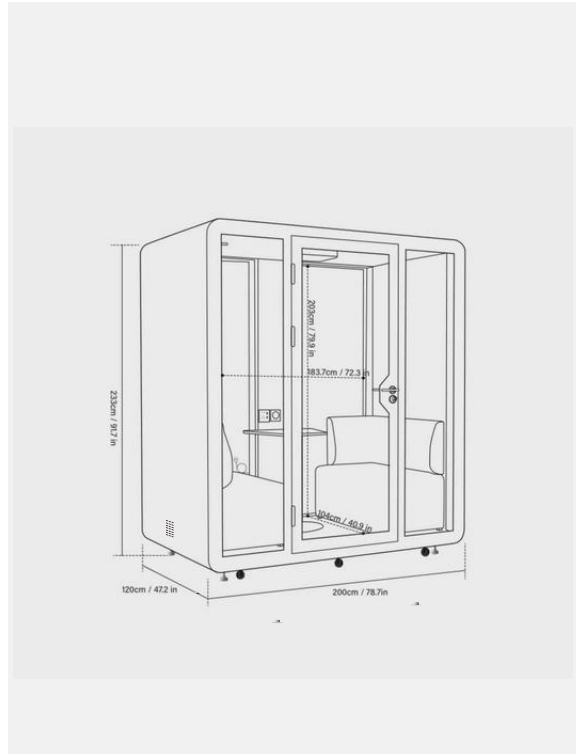

Shipping Crate Specifications

Crate Dimensions

- L 89.76" × W 29.53" × H 50"
/ 2280 × 750 × 1270 mm
- L 89.76" × W 37" × H 17.72"
/ 2280 × 940 × 450 mm


Shipping Weight

- 1384 lb / 628KG




Technical specifications

Product Materials	• Soundproof felt • Proprietary acoustic insulation • Acoustic plywood • Soundproof polyester fiberfill • Exterior stainless-steel panels • High-quality tempered soundproof glass • Thickness: 0.315" / 8 mm
Interior Materials	• Interior Panels • PET sheets laminated with recycled polyester fabric. • Carpet • Soundproof carpet with anti-static and stain-resistant low-loop pile construction.
Seating Materials	Sofa High-density foam, solid wood frame,multi-layer wood panels, and PU leather upholstery. Table Metal steel frame with density board and a white baked-enamel finish.
Furniture Dimensions	Table Dimensions • Table Size: L 60 × W 37 cm 23.6" × 14.6" • Table Height: 75 cm / 29.5" • Maximum Table Load: 50 kg / 110 lb
Seating Dimensions	• Seat Size: 100 × 50 cm 39.4" × 19.6" (W × D) • Seat Height: 73 cm / 28" • Maximum Load per Sofa: 300 kg / 660 lb

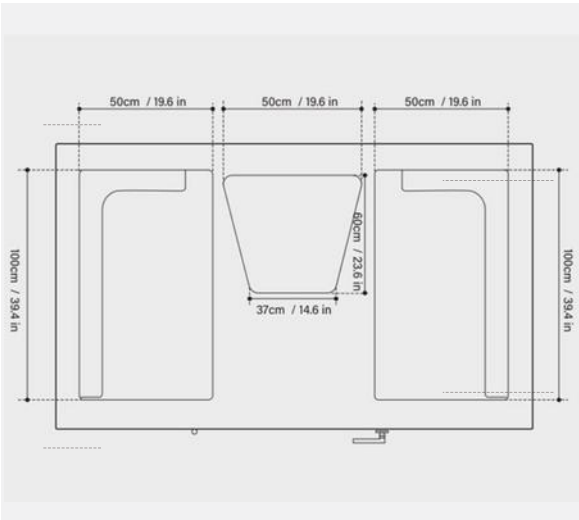

Safety

Fire Safety	An optional pre-drilled opening for a pendant fire sprinkler head can be utilized during installation or added later. Support for a standalone fire-suppression system is available upon request.
Seismic Safety	An optional seismic anchoring kit is available, including reinforced brackets designed to enhance the pod's structural stability during strong seismic events.

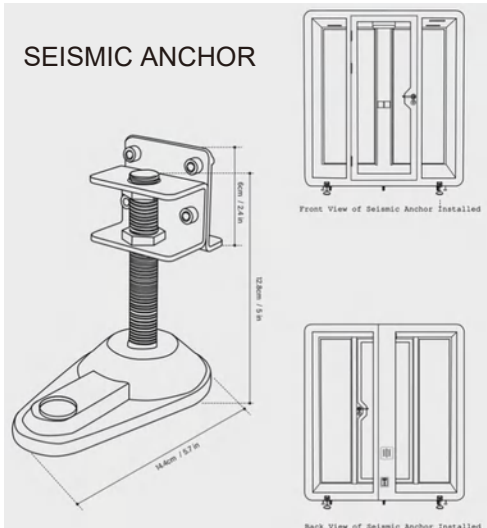

Technical specifications

POWER AND SPACE REQUIREMENTS

Power	OUTLETS 1 × Power outlet with USB-A and USB-C ports
Power Consumption	6500K / 36 W dimmable LED light ×1 0.7 A / 8.4 W silent dual-fan ventilation system ×2
Input Power	110–240 VAC, 10 A, 50–60 Hz
AC Output (Power Outlet)	110–240 VAC, 10 A, 50–60 Hz
USB-A / USB-C Output	- DC 5V / 2.1A - Dual-port simultaneous charging: 1A - PD fast charging supported

Space Requirements	Door Swing Angle 180°
--------------------	---------------------------------

Door Handedness	Right-handed by default
-----------------	---

Dimensions and Clearance Requirements	- Pod Depth (Back to Front, Including Doorway): 213.7 cm / 84.1" - Minimum Room Height: 240 cm / 94.5" - Seismic Anchoring: Allow 50 cm / 19.7" of free space outside each exterior panel wall. - Independent Fire-Suppression System: Provide 25.4 cm / 10" of clearance above the pod ceiling. - Sprinkler Installation: Please consult your local fire department for region-specific clearance requirements.
---------------------------------------	--

Installation Space	Installation requires an additional 24" of free space around the pod during assembly and installation.
--------------------	--

Mobility	All models come pre-installed with casters, allowing easy relocation without disassembly. To move the pod, raise the support stands until the casters contact the floor, then lower the stands again once the pod is positioned.
----------	---

