













①		⑤		⑩		 X 1pcs	 X 3pcs
②		⑥				 X 1pcs	 X 3pcs
③		⑦		⑪		 X 3pcs	
④		⑧				 X 3pcs	
		⑨					

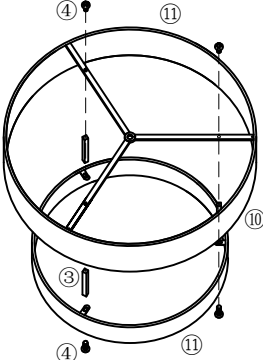


1. Remove out the screws ④ from tube ③, connect the lampshade ⑩ and lampshade ⑪ with tube ③ and screw ④.




remove out the threaded rod ② from fixture ①.

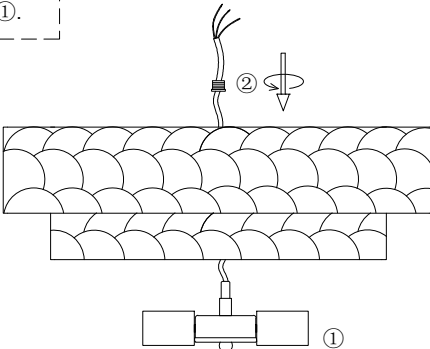

2. Let the wire of fixture ① go through the lampshade and threaded rod ②, rotate rod ② to install the lampshade to the fixture.

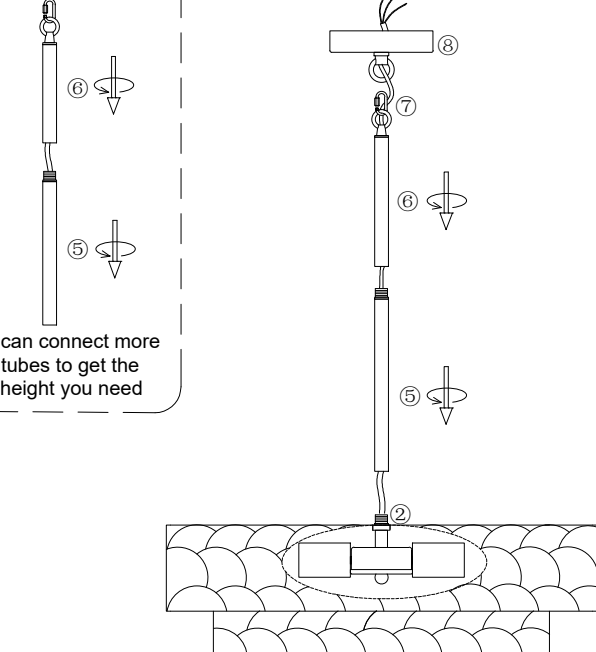

3. Rotate to install the tube ⑤, tube ⑥ to the fixture, hang the fixture to the canopy ⑧ with carabiner hook screw connection ⑦, let the wire go through the ring ⑦ and canopy ⑧.

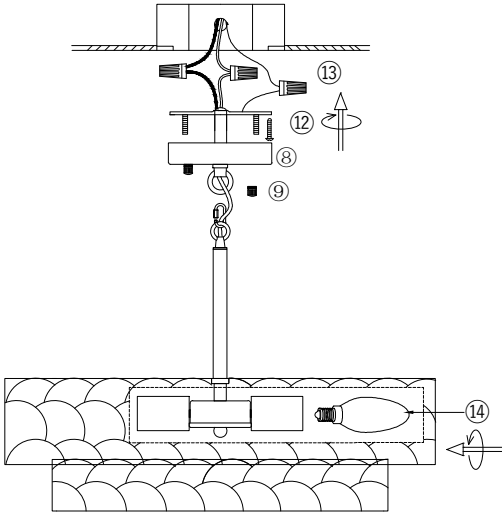

4. Install the bracket to the ceiling junction box with screw ⑫.
5. Connect the wire to your home line with cap connector ⑬.
6. Install the fixture to the bracket with cap nut ⑨.
7. Install the bulb ⑭. (bulbs are not included in the package)

D9112M-5
Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !