



Verdera® | K-99571-TLC

24" x 33" lighted mirror

Features

- Internal LED light guides provide optimally bright bathroom vanity lighting for grooming tasks
- Brightness at 2200 lumens ensures consistent lighting with no hot spots or dark spots. Produces 65 lumens per watt
- Approx. 3000 Kelvin light appearance delivers a neutral light ideal for overall bathroom aesthetics as well as tasks
- Minimum 90 CRI (color rendering index) lets you see yourself in the truest light for makeup application, grooming, and skin care
- Integrated LED bulbs have an estimated life expectancy of 59,000 hours
- Compatible with wall-mount LED dimmers (not included), which allow you to control lighting from multiple locations in the space



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:27 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

UL 962
CA Title 24 JA8
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Mirror Type: Polished Edge

Cutout
Width: 24" (610 mm)

Material

- Anodized aluminum construction with a durable rustproof and chip-resistant finish

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Lights: 120 V, 15 A, 60 Hz

Electrical Component Ratings

Lights: 120 V, 0.8 A, 60 Hz


Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:27 - US-CA

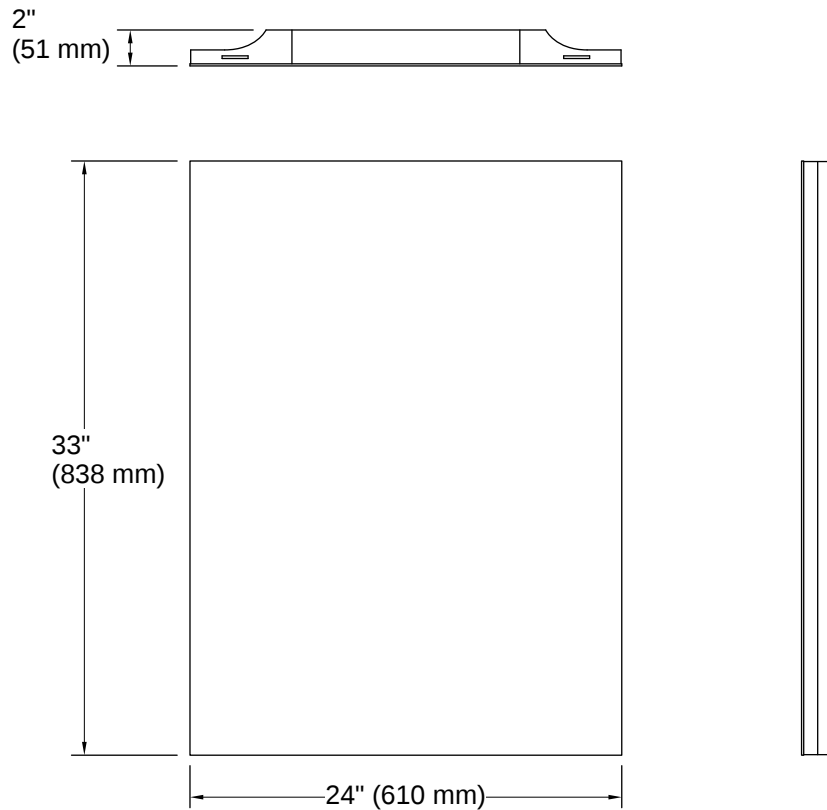

Installation

- Includes mounting hardware for surface installation
- Hang-and-secure mounting system for easier surface-mount installation
- Recommend professional electrician installation

Installation Notes

Install this product according to the installation instructions.

Select the type of fastener based on the wall material. A minimum 20 lb (9.07 kg) load bearing fastener is recommended.

Install the fastener to a stud to avoid possible property and product damage.

A dimmer switch is required. This product is compatible with most residential dimmer switches intended for incandescent and dimmable LED bulbs.

