


Bathroom Lock Installation Instructions

(W Series)

Change the direction of the latch bolt


Please put the safety button with threaded side toward the room, if the latch bolt and the door opening direction is opposite, please: pull out the latch bolt to rotate 180 degrees to loosen, restore can change the direction.

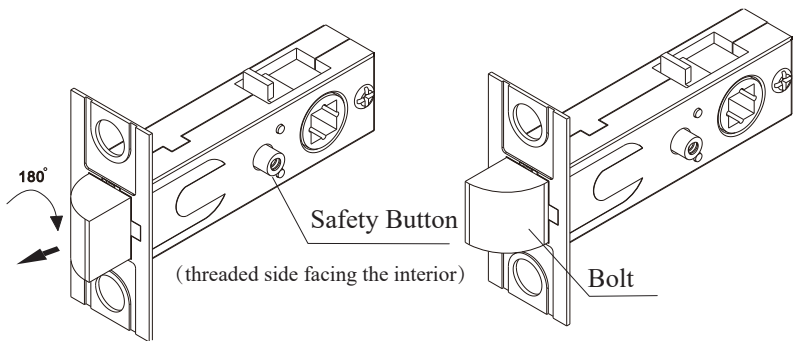

Before adjustment


After adjustment

Install the lock body and the square rod

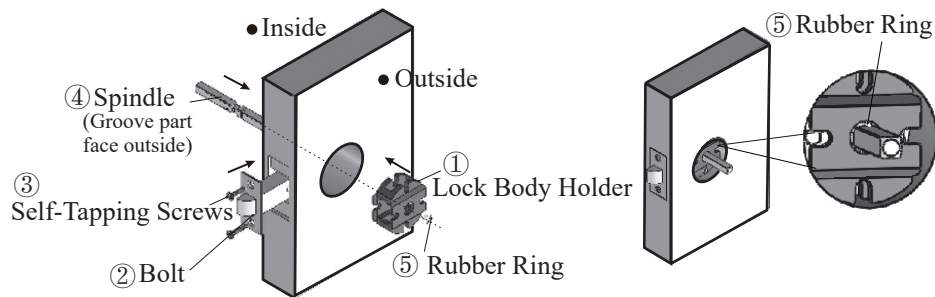


1. Place the ① lock body holder into the opened hole.
2. Push the ② lock body into the hole and into the side square groove of the ① lock body holder.
3. Use ③ self-tapping screws to fix the lock body.
4. Remove the ⑤ rubber ring from the ④ spindle, with the grooved end facing the outside the door, pass the lock body from the inside of the door.
5. Install ⑤ rubber ring into the grooved end of ④ spindle and lock into the groove.

Install the coupling screw

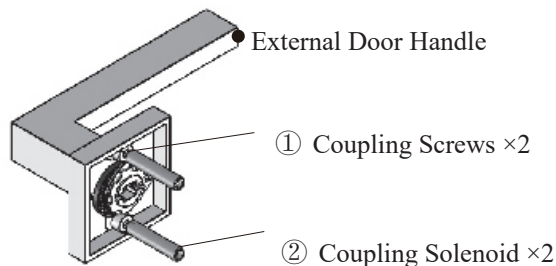

Install the coupling screws and coupling solenoids on the door handle.

Install internal and external door handles

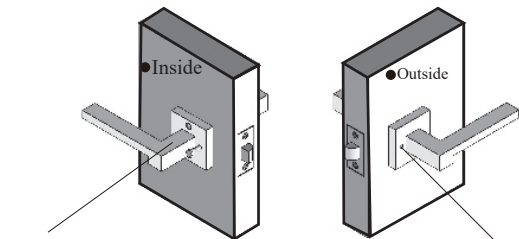

① Safety rod: Press the safety lever to lock the door. At this time, press the external door handle cannot be opened. Press the internal door handle to release the safety lever.

② Emergency unlocking hole: In case of emergency, insert a rod with a diameter less than 0.5 to release the safety lever.

Common emergency door-opening items: small screwdrivers, paper clips, striped hairpins, pen refills, etc.

1. Add the spring to the hole in the center of the inner handle. Align the spindle holes of the internal and external door handles with the spindle and screw in the coupling screws and hexagon inner screws. Door handles rotate flexibly and safety rod press smoothly, that is, the installation is correct.

2. Drill installation holes for the strike box and strike plate on the door frame, and install the strike box and strike plate.

Attention:

Please read the instructions or installation video carefully, make sure to confirm the orientation of each part, make sure to install the rubber ring and spring, otherwise you will risk not being able to unscrew the lock and be locked inside.

SCAN THE QR CODE FOR INSTALLATION VIDEO

