

11	BAR2 R	0-255 Brightness adjustment
12	BAR2 G	0-255 Brightness adjustment
13	BAR2 B	0-255 Brightness adjustment
14	BAR2 W	0-255 Brightness adjustment
.....
35	BAR8 R	0-255 Brightness adjustment
36	BAR8 G	0-255 Brightness adjustment
37	BAR8 B	0-255 Brightness adjustment
38	BAR8 W	0-255 Brightness adjustment

9 Channel Table

	Function	Explain
1	Horizontal operation	0-255 Adjust the forward, downward, and reverse
2	operation	0-255 Speed regulation
3	Built-in effect	Built-in effect
4	Effect speed	Built in speed adjustment
5	Total dimming	0-255 Whole adjustment
6	Red dimming	0-255 Whole adjustment
7	Green dimming	0-255 Whole adjustment
8	Blue dimming	0-255 Whole adjustment
9	White dimming	0-255 Whole adjustment

Operating Instructions:


1:LED eight eyes light, using a digital display control channel set: the international standard DMX-512 signal control can also be used in auto mode and voice control mode, you can set the channel controller to control multiple lamps

2: This product is equipped with a manual, a pair of handles, six angle screws 4, power cord one.

8-EYE 4-COLOR BEAM LIGHT INSTRUCTIONS



Numeral Display Function Form

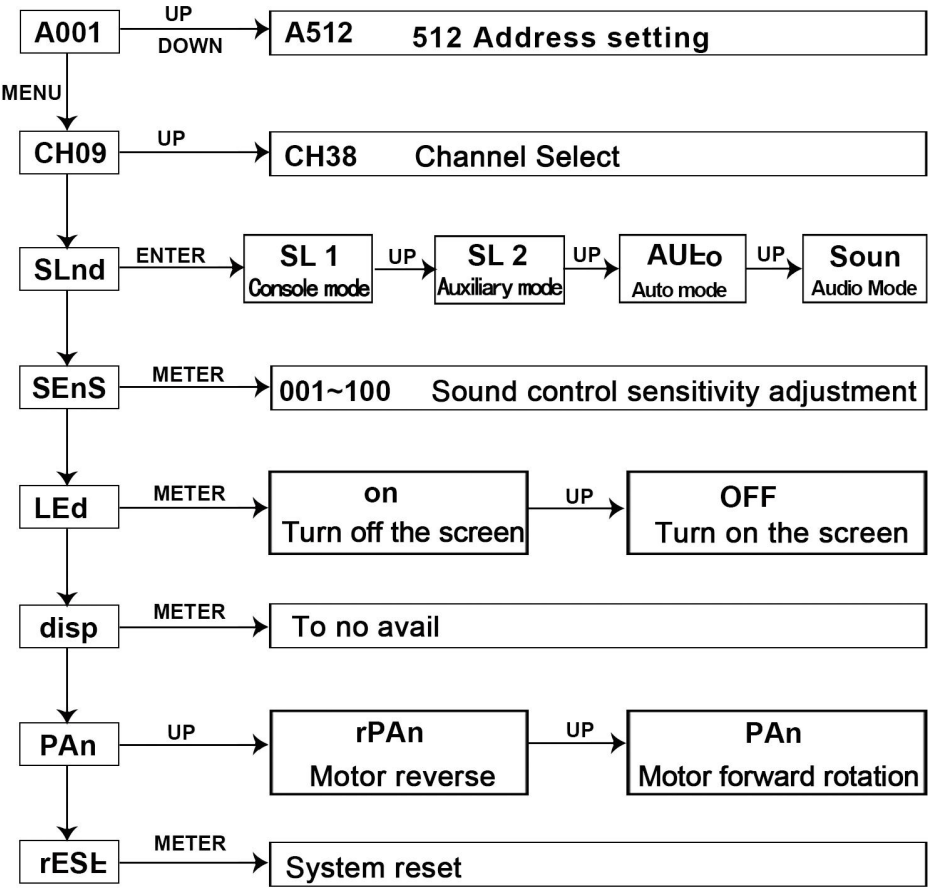

38 Channel Table

	Function	Explain
1	Horizontal operation	0-255 Adjust the forward, downward, and reverse
2	Horizontal running speed	0-255 Speed regulation
3	Built-in effect	
	0-10	5-38The channel works

	11-22	Built in effects 1
	21-31	Built in effects 2
	32-42	Built in effects 3
	43-53	Built in effects 4
	54-64	Built in effects 5
	65-75	Built in effects 6
	76-86	Built in effects 7
	87-97	Built in effects 8
	98-108	Built in effects 9
	109-119	Built in effects 10
	120-130	Built in effects 11
	131-141	Built in effects 12
	142-152	Built in effects 13
	153-163	Built in effects 14
	164-174	Built in effects 15
	175-185	Built in effects 16
	186-196	Built in effects 17
	197-207	Built in effects 18
	208-218	Built in effects 19
	219-229	Built in effects 20
	230-240	Built in effects 21
	241-250	Built in effects 22
	251-255	Sound control effect
4	Built in speed	Built in speed adjustment
5	Total dimming	0-255 Overall brightness adjustment
6	Strobe	0-255 Stroboscopic adjustment, from slow to fast
7	BAR1 R	0-255 Brightness adjustment
8	BAR1 G	0-255 Brightness adjustment
9	BAR1 B	0-255 Brightness adjustment
10	BAR1 W	0-255 Brightness adjustment