

INSTALLATION INSTRUCTION

LED Disk Light

E-FM-042406R

East Grove

• HOME •

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by EastGroveHome. Substitution of parts or accessories not designated for use with this product by EastGroveHome could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.


- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits EastGroveHome. Remplacer des pièces ou accessoires non conçus pour ce produit EastGroveHome pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.


HARDWARE

A



Wire Connector
Qty: 3 pcs

B




Junction Box Screws
Qty: 2 pcs

C



E26 Socket Adapter
Qty: 1 pcs

D




Mounting Springs
Qty: 2 pcs

Fig.1 Wiring




Fixture Wires	House Wires
Black or Smooth	Black (Hot)
White or Ribbed	White (Neutral)
Bare wire (Ground)	Green or Bare Copper (Ground)

Fig. 2 5CCT Switch



2700K
3000K
3500K
4000K
5000K

Fig. 3 Sealing

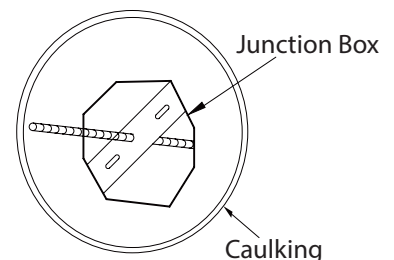

EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801




*Corporate Address ONLY – Do not send returns here

INSTALLATION INSTRUCTION
LED Disk Light
 E-FM-042406R

East Grove
 • HOME •

Fig.4

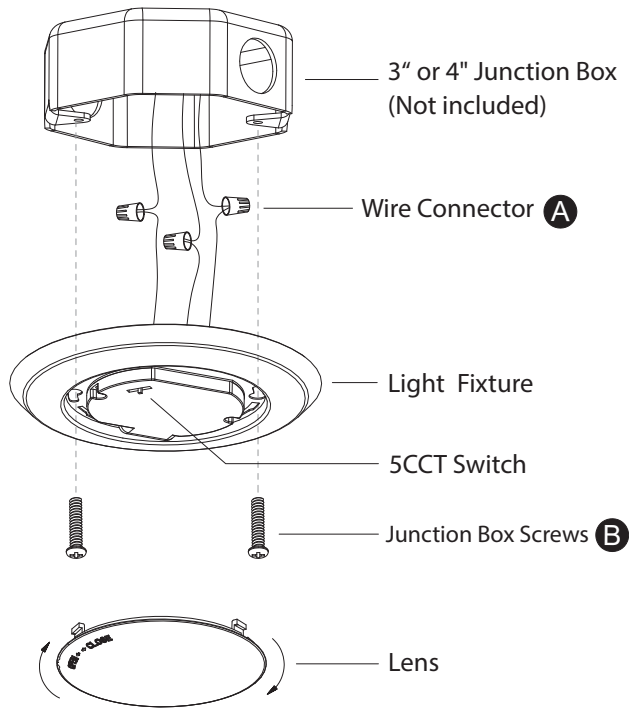

INSTALLATION ONTO 3" OR 4" JUNCTION BOX

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.


MOUNTING THE FIXTURE (Fig. 1 \ Fig.2 \ Fig.4)

3. The lamp can switch between five color temperatures (2700K-3000K-3500K-4000K-5000K), which can be adjusted to your preference with the switch in the fixture (Fig. 2).
4. Connect the fixture's input wires to junction box wires as shown (Fig. 1). Make sure that all wire connectors (A) are secure. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. After wires are connected, tuck them carefully inside the junction box.
5. Secure the light fixture to the junction box using standard junction box screws that comes with the junction box. (Fig. 4)
Note: (i) using any other non-original-manufacturer provided junction box screw may result in safety issue.
6. Twist the lens clockwise on light fixture metal enclosure and lock the lens in place. Turn on the power after installation, check the fixture can work well. (Fig. 4)

WET LOCATION RATED (Fig. 3)

1. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. indoor/outdoor silicone sealant) to outline the outside of fixture canopy where it meets the wall.

EastGroveHome.com
 Phone: 888-602-0990

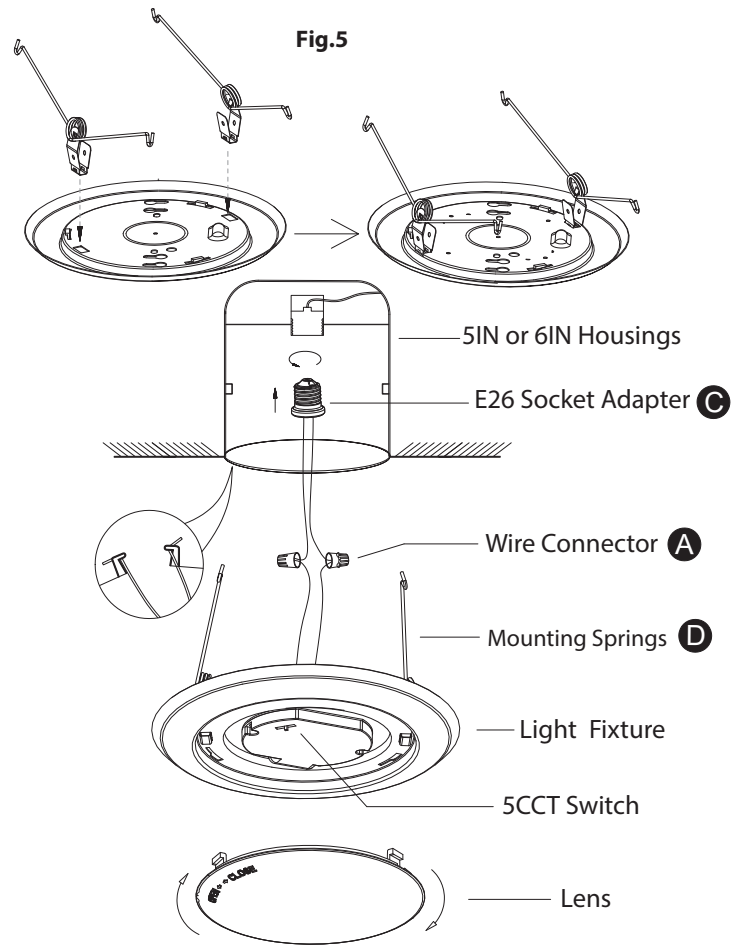

INSTALLATION ONTO 5" OR 6" RECESSED HOUSINGS

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 1 \ Fig.2 \ Fig.5)

3. Insert the mounting springs into the rectangular slots firmly.
4. Screw E26 "medium screw base" socket adapter into socket in housing.
5. The lamp can switch between five color temperatures (2700K-3000K-3500K-4000K-5000K), which can be adjusted to your preference with the switch in the fixture (Fig. 3).
6. Connect the fixture's input wires to junction box wires as shown (Fig. 2). Make sure that all wire connectors (A) are secure. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. After wires are connected, tuck them carefully inside the junction box.
7. Squeeze the torsion springs together as shown and install into torsion spring brackets inside the housing. (Fig. 4)
8. Twist the lens clockwise on light fixture metal enclosure and lock the lens in place. Turn on the power after installation, check the fixture can work well.

Corporate Headquarters
 1000 N West Street, Suite 1200
 Wilmington, DE 19801

