


Assembly & Installation Instructions

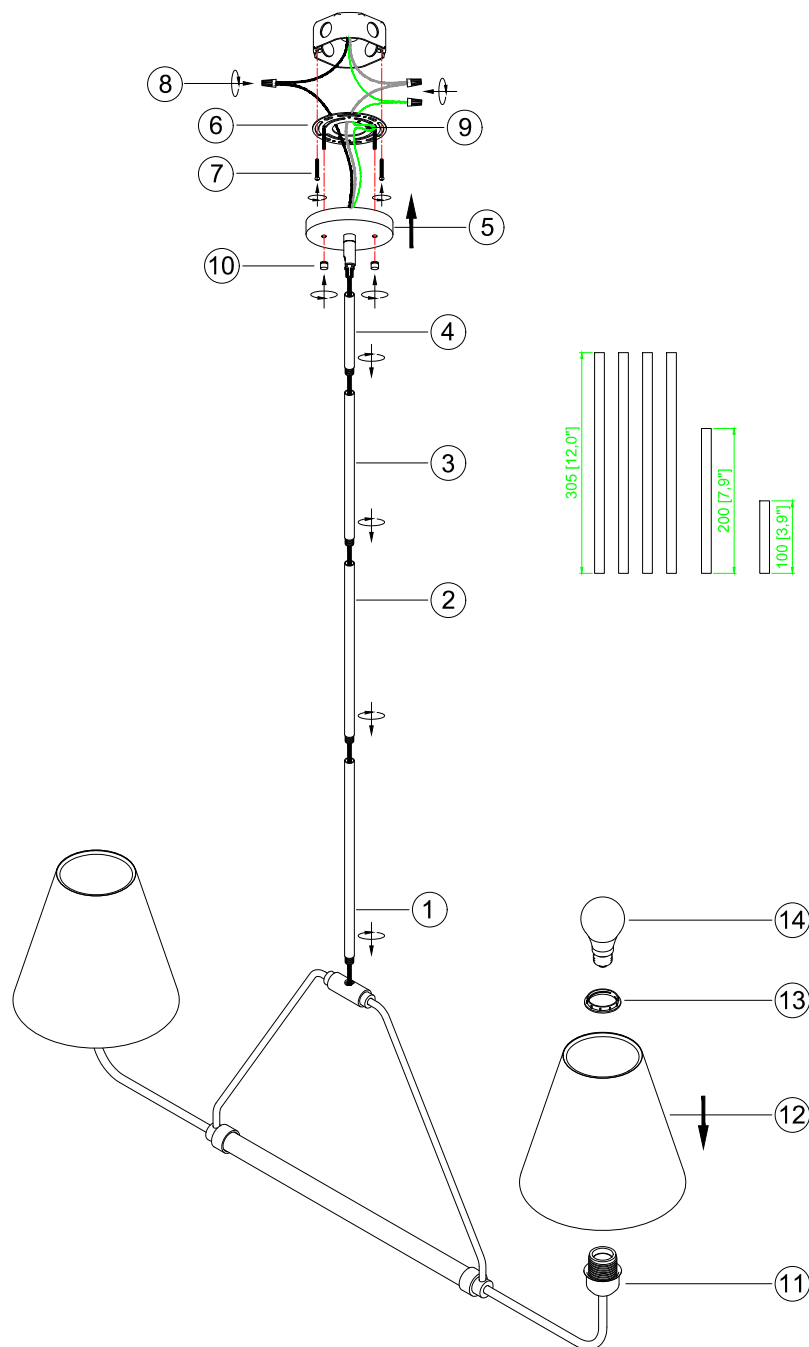

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- 1-5. Determine the required hanging height using the provided rods and adjustable canopy, then tighten them to secure the fixture.
- 6-7. Secure the mounting bracket to the junction box with 2 mounting screws.
8. Take out the power cord from the junction box and connect the wires using wire connectors as follows:
 - Fixture BLACK wire to home LIVE/HOT wire.
 - Fixture WHITE wire to home NEUTRAL wire.
9. Attach the fixture ground wire to the mounting bracket using the green screw, and then connect it with the home ground wire together using a wire connector. Then carefully tuck all wires back into the junction box.

NOTE: The bare wire can NOT be exposed to prevent leakage.
10. Secure the canopy (5) to the mounting bracket with decorative nuts (10).
- 11-13. Attach the lampshade to the socket and tighten with the socket ring to secure.
14. Install the bulbs (not included).