



ITEM #: RVL-CC16025 / RVL-CC16036

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!

Email: help@kira-home.com


Facebook/Instagram: @KiraHomeDecor

Phone: 888.208.2085

INSTALLATION INSTRUCTIONS

1. Measure Canopy (D) height with measuring tape. Adjust Canopy Screws (E) on Mounting Plate (A) to the height of measured Canopy (D) plus 1/4" to allow them to protrude through Canopy (D) during installation. Lock Canopy Screws (E) in place with the hex nuts.
2. Secure Mounting Plate (A) to junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (E) pointing away from the junction box.
3. Place Canopy (D) against the ceiling by inserting Canopy Screws (E) through the appropriate holes located on Canopy (D). Adjust Canopy Screws (E) and hex nuts until 1/4" of the threaded portion is visible. Remove Canopy (D) once Canopy Screws (E) have been adjusted. Remove Mounting Plate (A) and set aside.
Note: If 1/4" of Canopy Screws (E) are not visible, remove Canopy (D) and re-adjust Canopy Screws (E) to proper height and lock them in place with the hex nuts.
4. Determine desired hanging length using Downrods (G). Secure them together.
5. Thread Wires (H) from the top of Center Connector (J) up through Downrods (G). Secure Downrods (G) to the top of Center Connector (J).
6. Use wire cutters to cut Wire (H) 10" beyond the length of Downrods (G) to allow for easier wire connection.
7. Thread Wire (H) through bottom of Canopy (D). Secure Canopy (D) to the top of Downrods (G).
8. Attached Hooks (I) from Fixture (K) onto rings on bottom of Center Connector (J).

9. With a drill, make a hole in your junction box and insert a plastic anchor. With the help of a friend, lift Fixture (K).
10. Thread Support Cable (M) through Mounting Plate (A). Attach Washer (N) and Support Cable (E) from Canopy (D) onto the junction box using Screw (O). Secure tightly.
11. Re-secure Mounting Plate (A) to junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (E) pointing away from the junction box.
12. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

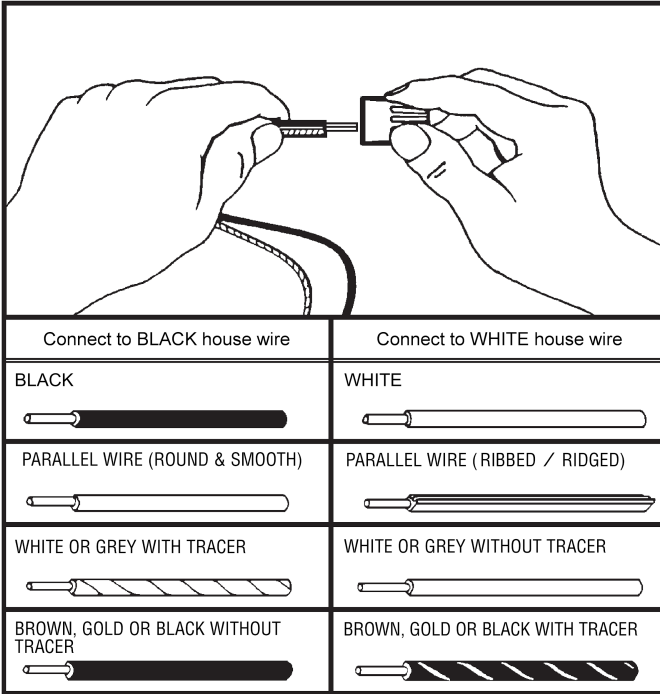

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

13. Place all Wires (H) and Wire Connectors (C) back into the junction box.
14. Place Canopy (D) against ceiling, ensuring Canopy Screws (E) are protruding through the holes on Canopy (D) and secure in place using Decorative Caps (F).


Note: If Canopy (D) does not sit flush against the ceiling, remove Canopy (D) and readjust Canopy Screws (E) and hex nuts.
15. Install bulbs (not included) into Sockets (L).

Enjoy your new fixture!

Kira Home

ITEM #: RVL-CC16025 / RVL-CC16036 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder

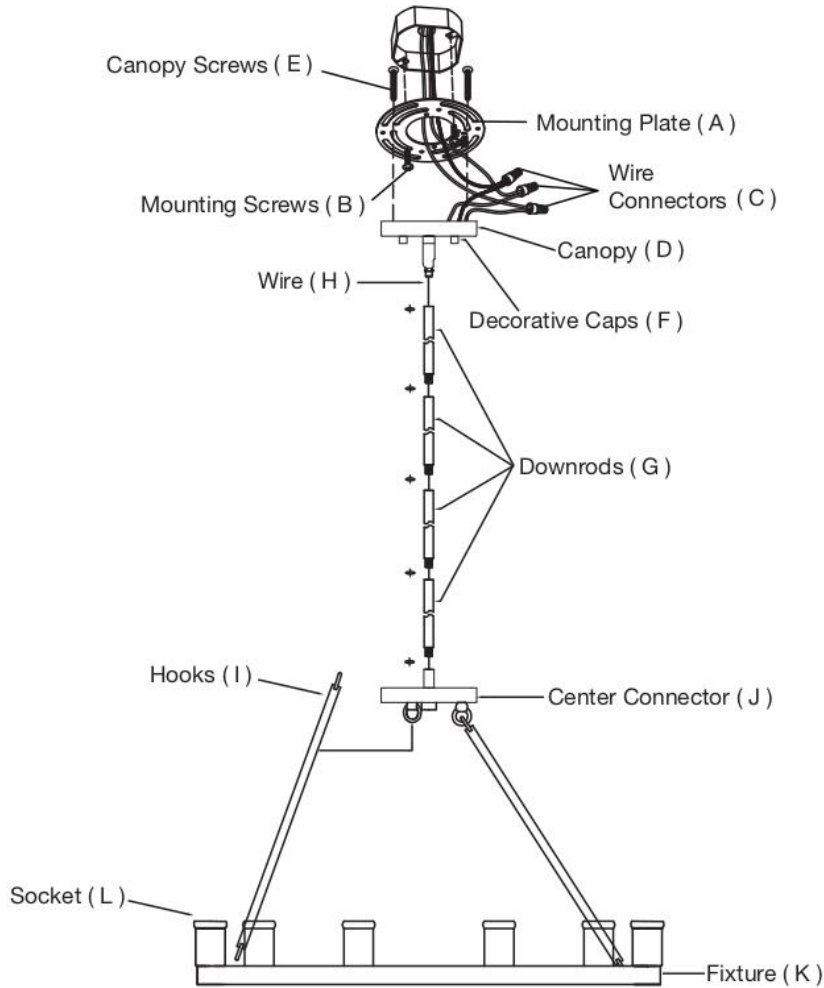

Mounting Strap Installation

