


110V


Installation & Operating Instructions for the
Owner's Installation ,Manual

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

1LT WALL SCONCE

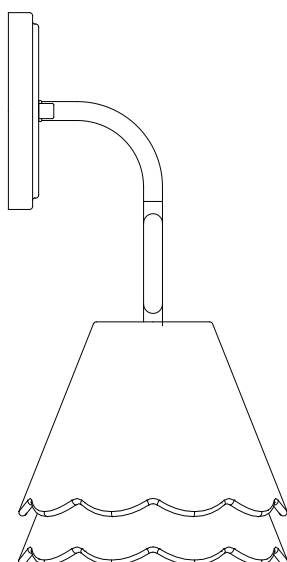


PACKAGE CONTENTS

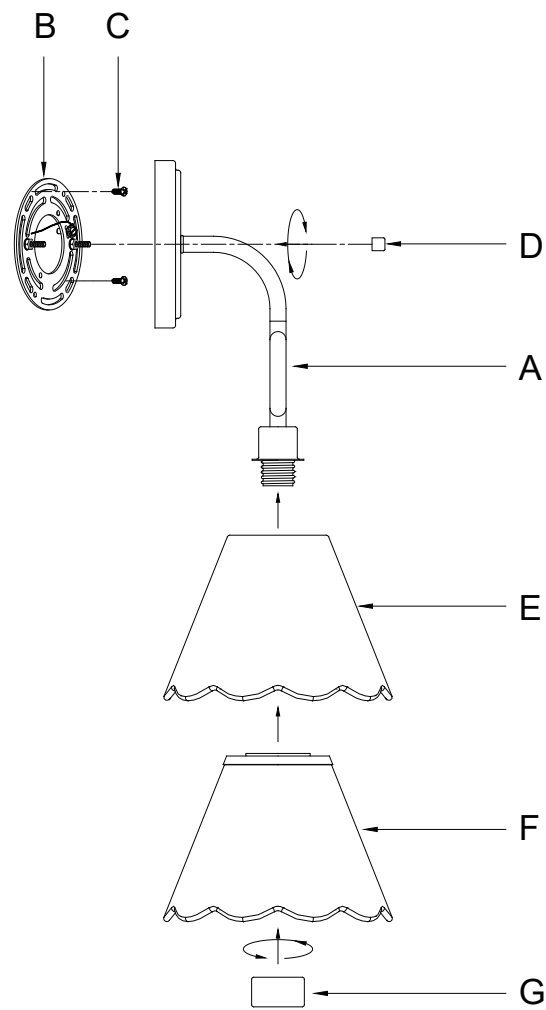

PART	DES CRIPTION	QTY.	PART	DES CRIPTION	QTY.
A	Lamp body	1	G	Socket collar	1
B	Mounting bracket	1			
C	Outlet box screw	2			
D	Lock ball	2			
E	Shade-1	1			
F	Shade-2	1			

HARDWARE CONTENTS

AA



Wire
Connector
Qty: 3

! SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

! WARNING

- IMPORTANT: NEVER attempt any work without shutting off the electricity.
- Place the main power switch in the "OFF" position and unscrew the fuse(s), or switch "OFF" the circuit breaker switch(es), that control the power to the fixture or room you are working in.
- Place the wall switch in the "OFF" position. If the fixture to be replaced has a switch or pull chain, place it in the "OFF" position.
- Do not use bulbs with wattage greater than specified on this fixture.
- California Prop. 65: This lighting fixture contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm. Wash hands after use.

CAUTION

- If you have any doubts about how to install this lighting fixture, or if the fixture fails to operate completely, please contact a licensed electrical contractor.
- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to obey this instruction could invalidate ETL listing and/or C.S.A. certification of this fixture.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated assembly time: 30 minutes to 1 hour


Tools Required for Assembly (not included): Phillips screwdriver, flathead screwdriver, electrical tape, ladder, safety glasses.

ASSEMBLY INSTRUCTIONS

1. Mounting bracket (B) Lock ball (D)


Lamp body (A)

Note: Unscrew the two lock balls from the lamp body. Remove the mounting bracket from the lamp body and keep the mounting bracket and two lock balls for later use.

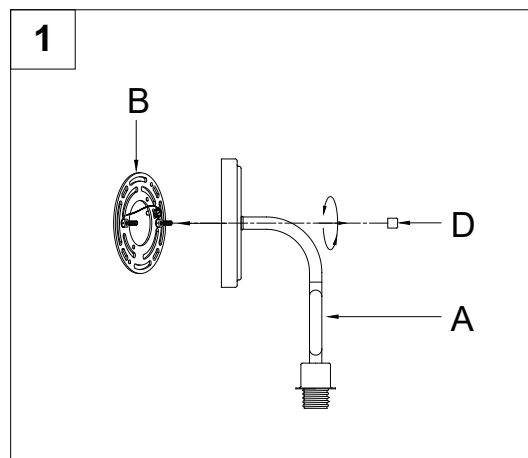

2. Mounting bracket (B) Outlet box screw (C)

Note: Secure the mounting bracket to the outlet box (not included) with outlet box screws. Tighten until snug.

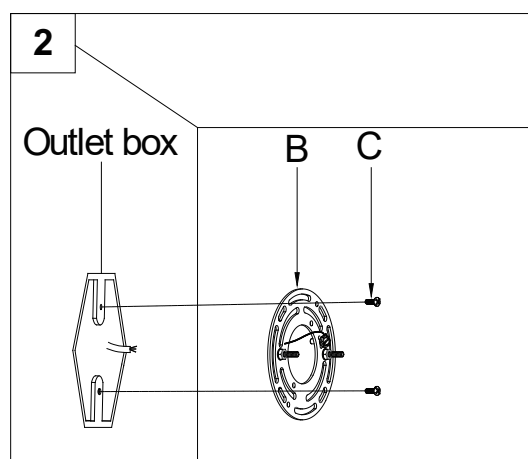

3. Wire connection guide:

Use the wire connectors to connect the wires.

Ground wire:

- **For installation in the United States:** Wrap ground wire from outlet box around ground screw preassembled on mounting bracket (B) no less than 2 in. from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector (AA).
- **For installation in Canada:** If fixture is supplied with ground wire, wrap ground wire around ground screw on mounting bracket (B). Tighten ground screw. Connect fixture ground wire to outlet ground wire with the wire connector (AA).

Supply wires:

- Connect the Neutral (White) supply wire from the outlet box to the Neutral fixture wire (White or Parallel Cord "D" shaped and ribbed).
- Connect the Hot (Black) supply wire from the outlet box to the Hot fixture wire (Black or Parallel Cord round and smooth).

NOTE:

Fixture wires will either be:

- Black and White.
- Parallel Cord SPT-1 lamp wire with one round smooth wire and one "D" shaped ribbed wire.

Hardware Used

AA Wire Connector



x 3

AA BARE COPPER, OR GREEN GROUND FIXTURE WIRE

BARE COPPER, OR GREEN GROUND SUPPLY WIRE

BLACK SUPPLY WIRE

BLACK FIXTURE WIRE

WHITE SUPPLY WIRE

WHITE FIXTURE WIRE

BLACK SUPPLY WIRE

OR PARALLEL FIXTURE CORD (ROUND AND SMOOTH)

WHITE SUPPLY WIRE


PARALLEL FIXTURE CORD ("D" SHAPED AND RIBBED)



4. Mounting bracket (B) Lock ball (D)


Lamp body (A)

Not e: Reattach the backplate of the lamp body to the mounting bracket.
Secure with the previously removed lock ball.

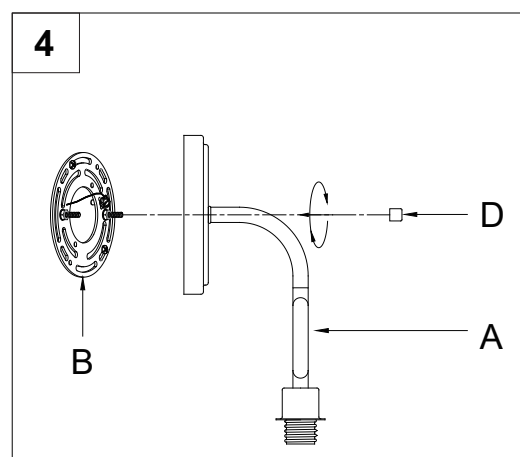

5. Lamp body (A) Shade-1 (E) Shade-2 (F)
Socket collar (G)


Not e: Remove the socket collar from the socket of the lamp body.
Then, place the shade-1 and shade-2 over the socket of the lamp body as shown.
Secure by threading the socket collar onto the socket. Hand-tighten until snug.

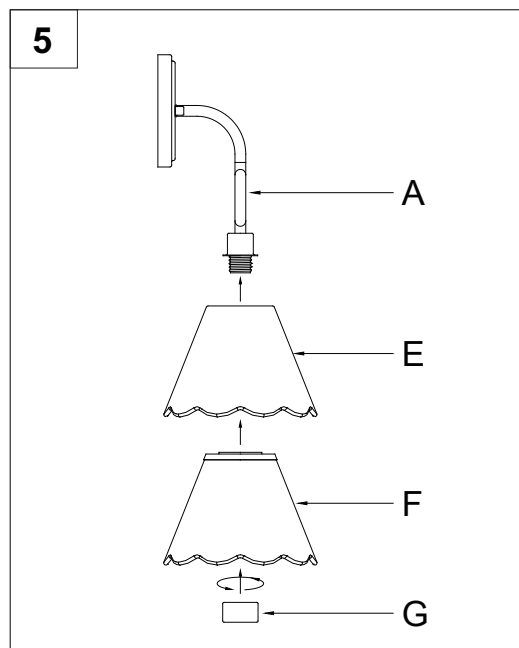

6. Install the correct bulb (not included) referring to fixture markings and/or labels for maximum wattage.



NOTE: Use one 60W maximum Candelabra base (E12) type "B" incandescent lamp or 9W maximum Candelabra base (E12) self-ballasted LED bulbs (sold separately).

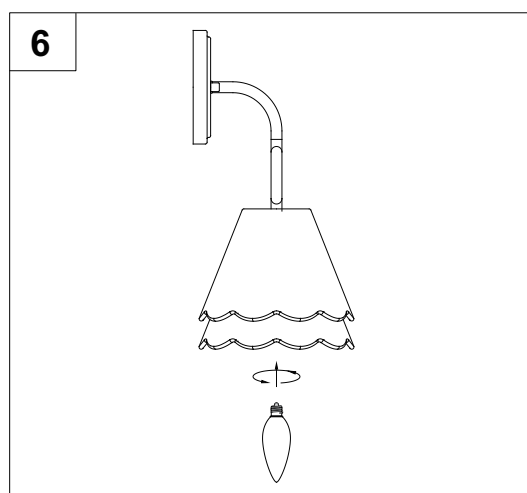

CARE AND MAINTENANCE

- . Always be certain that electric current is turned off before cleaning this item.
- . Use a soft, moist cloth with mild non-abrasive soap to clean fixture. Never use glass cleaner on fixture, as it will damage the metal finish.

TROUBLE SHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Fixture does not light.	1. Fixture may be wired incorrectly.	1. Check wiring.
	2. Worn or broken bulb.	2. Replace bulb.