



Lumary

USER MANUAL


Product&Notes

What's in the Box



• Lumary Recessed Downlight Pro

PACKAGE CONTENTS



A



B



C

PART	DESCRIPTION	QUANTITY
A	6" Lumary Recessed Downlight Pro	1
B	Clip Springs	2
C	TP24 Connector	1

Notes

- Lumary's products don't recommend that you use dimmers because flicker may occur during use.
- Make sure your mobile device meets the following requirements:
For iOS: Ensure your device is running iOS 13.3 or higher.
For Android: Ensure your device is running Android 9.0 or higher.
- Ensure that you are connecting to a 2.4GHz Wi-Fi network as Lumary devices are not compatible with 5GHz networks.

IMPORTANT SAFETY INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date. When using electrical equipment, basic safety precautions should always be followed as below:

WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

WARNING – Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input ratings of the luminaire. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.

Installers should examine all parts that are not intended to be replaced by the retrofit kit for damage and replace any damaged parts prior to installation of the retrofit kit.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS or
NOT FOR EMERGENCY LIGHTING
SUITABLE FOR TYPE IC OR NON-IC LUMINAIRES

This lamp is only compatible with provided or other specified controls listed in these instructions for proper functionality. This lamp will not operate properly when connected to a standard incandescent dimmer or other off-shelf dimming controls.

The Lumary Retrofit Recessed Downlight is designed to install into most recessed can fixtures. However, please be aware that it may not be compatible with some models. Always ensure a secure fit into the can and ensure that the Lumary Retrofit Recessed Downlight fits firmly against the ceiling and does not sag out of the fixture.

The retrofit down light should be used only with metal housing, and the metal housing should be grounded.



INSTALLATION

STEP1

Secure the clip springs firmly within the retrofit connector. (Important: When inserting the spring, gently press down. If the spring does not lock in easily, try turning it around.)


STEP2

Switch off the mains before starting installation.



Step 3

The E26 base with connector is included in the Lumary Downlight package. Screw in the E26 base into the metal can, rotating it in an anti-clockwise direction in the holder.

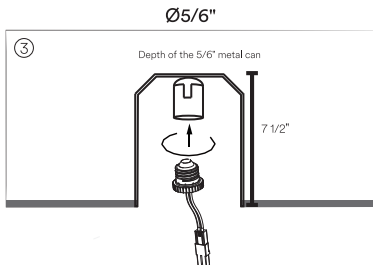

Step4

Plug the orange connector into the base of the downlight.

Step5





Switch on the mains. Check that the light is in the distribution state or working properly.

Step6

Push the downlight upwards through the cut out towards the metal can. Your Lumary Downlight is installed. (During installation, the mounting springs can be adjusted inward and outward to accommodate metal tubes of different sizes.)

Step7


When removing the light, grasp it at the 1/4 mark with both hands, then gently apply downward force; the spring will slide in the direction of the arrow. Once there is enough space, pinch both sides of the hook to detach it.



Paring Your Device with Lumary App

What You Need:

- A Wi-Fi router supporting the 2.4GHz and 802.11b/g/n bands. 5GHz is not supported.
- A smartphone running iOS or Android.



1.Download the "Lumary" App from the App Store or Google Play.

2.Register a Lumary account.

Note:Please select your region and country.

3. Connect

NOTE: Lumary's products can't connect to 5GHz networks.

Steps:

1. Turn on your smartphone's Bluetooth;
2. Open the Lumary App, In the top corner of the Devices screen, click "+" and select "Add Device" to confirm that the device is paired.
3. Each time the device without distribution network is powered on, confirm the light is breathing or blinking pairing mode;
If not, you need to use the switch to reset: on-off-on-off-on;
4. Find the device, choose Wi-Fi and enter password, press "Next".
Click "Add", and wait patiently. After that, click "Done", and the device is successfully added to the App.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

Remote control paired device

Good news: production of this product after October 2025 will be compatible with our remote control. **If** you require more detailed information, please feel free to contact us via our after sales service e-mail address: upport@lumary.tech.

1. The device is powered by 2xAAA dry batteries.
2. The lighting device needs to be paired with the App through the mobile phone first.
3. For devices that have completed network configuration to the App, keep the network unblocked.
4. Turn off the device through the wall switch, and then turn on the switch after 5 seconds. Within 1 minute of power-on, the lighting device and remote control are in a pairing state.
5. Long press any key on the remote control A/B/C/D as needed until the device flashes to indicate success. **If** during the configuration process, the required device is not fully paired, long press the group button again until all devices are paired. If it times out, repeat step 4.

1. Short press: On/OFF for devices paired under grouping
2. Long press: Group key for device pairing
3. Long press "Grouping Key" and "Brightness-" combination key to unpair all devices under the grouping"
4. Bind: Group A/B/C/D key (long press until device blinks or breathes).
5. Unbind: "Brightness-" + any group A/B/C/D key (long press combination key for 3s).

Parameter information

Name	Lumary Recessed Downlight Pro
Model	L-DL6E1/L-DL6E4
Input Voltage	120VAC,60Hz
Wattage	13W
Color Temperature	RGBAI +Tunable White(2700K-6500K)
CRI	90+
Lumens	1000lm
Beam Angle	110°
Rated Life	25000h



Contains FCC ID:2ANDL-CBU

Made in China

Troubleshooting

1. Can't connect the light to Lumary App.

- Check whether the downlight is powered on.
- Check whether your smartphone Wi-Fi is enabled.
Please make sure Wi-Fi connected to your phone is 2.4GHz (5GHz band is not supported).
- Make sure your smartphone is close to the device when connecting for the first time.
- Check if you have entered the correct Wi-Fi password during Wi-Fi setup.
- Make sure the distance between the bulb and router is less than 50ft.
- If you fail to bind, you will need two phones, one to set the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, the device is normal. The problem may be in the router, you need to check your router Settings to see if there are MAC and DHCP restrictions.

2. Can I group multiple Lumary devices together?

- Yes, you can group multiple lights and other Lumary devices by Schemes, Same model, General (Wi-Fi or Bluetooth devices).
It depends on the function of different devices.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Voice Control Quick Guide for Amazon Alexa

1. Log in to Lumary App, tap the smart device and enter into, click"✎" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".
4. Tap "Allow".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

Name and Control Each Device by Voice

Alexa will automatically sync the names you set for your devices in the Lumary app. You can rename the light in Alexa to simplify voice commands.

To control your Lumary smart device, just ask Alexa. Make sure your devices are already set up using the Lumary App.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the bedroom light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the coffee machine."

"Alexa, set the living room to 50%."

"Alexa, dim porch light."

*Some commands require compatible devices.



Voice Control Quick Guide for Google Assistant

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".
4. Click "Agree and link".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

Name and Control Each Device by Voice

Google will automatically sync the names you set for your devices in the Lumary App. You can rename the light in Google to simplify voice commands.

To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary App.

Things you can say*:

"Hey Google, turn on all the lights in my bedroom."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, turn off the coffee machine."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

Customer Service

24

HOURS

Quick Response

Quick Response

If there is any problem please check the Troubleshooting page . When you could not fix this, please contact us after-sale email, we will respond within 24 hours. The fastest way to help us confirm the problem is to send us a video of the problematic light to our official email box. support@lumary.tech
WhatsApp:+86 188 2656 6792

30

DAYS

MONEY-BACK

MONEY-BACK

For **30 days** after the date of purchase, return your Lumary product and receive a full refund **for ANY reason**.

2-YEAR WARRANTY



Free Replacement No Repair

After the buyer purchases the product, if the product has a quality problem within the scope of the seller's warranty service within the service validity period, the seller will replace the buyer with a **product for free**.



Friendly Reminder

We do not recommend you to leave a product review first, as we cannot get in touch with you through reviews/feedback to solve any product usage problems. Please contact us through the after-sales email. We sincerely hope to solve your problem every time and provide the best after-sales service.

Please rest assured that our service aim is to make customers 100% satisfied. If there is any problem, please contact us as soon as possible, we will not let you down.


CONTACT US

Contact by "Ask a question" on the "Lumary" Seller Page.
(7x24H) Because Amazon's information system sometimes can't successfully receive and send information, in which case you may not receive our response. We will never be able to reply to your inquiry. If you find that we have not responded to you within 24 hours, please send us an e-mail.
Contact via Email: support@lumary.tech (7x24H)


- Sign into your Amazon account. Search the product about Lumary Smart Home.



- Go to the product listing on click the Lumary Smart Home.



- Click "Ask a Question" or "Contact the Seller"



If you have any questions about product settings or operations, please feel free to reach out to us!

Customer Service Email: support@lumary.tech

You can also find us on social media. Simply search for our username on your preferred platform, or scan the QR code to join the growing Lumary user community!

- Facebook: @lumary.official
- X: @lumary_official
- Instagram: @lumary.official
- Pinterest: @lumary_official
- YouTube: @lumary.official
- Reddit: @Lumarysmartlight
- TikTok: @lumary.official



Facebook



Facebook Group



Instagram



YouTube



TikTok



X



Pinterest



Reddit

Can't connect? Need help?



HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:

support@lumary.tech

Visit us at:

www.lumary.tech

www.lumarysmart.com