


30" UNDER CABINET RANGE HOOD

30" STAINLESS STEEL



TOP OUTLET CONFIGURATION — 30"

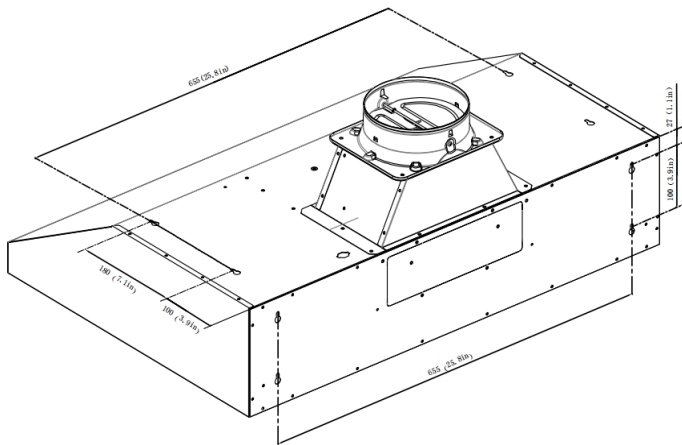

SPECIFICATIONS

SKU	RH-PRO-30-SS
Mount	Under cabinet
Overall W × D × H	30 × 21 × 7 in
Maximum airflow	400 CFM
Top outlet	Ø 6 in round · centered on a 12 in mounting plate
Rear outlet	9.8 × 3.1 in rectangular
Blower motor	Brushless DC
Rated power	270 W · 120 V, 60 Hz
Product weight	35 lb
Packaged weight	45 lb
Package W × D × H	34 × 24 × 14 in
Power	120 V · NEMA 5-15P
Lighting	2 × 3 W LED
Controls	Two knobs · fan 1–10, light 1–9
Certification	ETL

Installation — Minimum 26 in above the range.

OVERVIEW


Under-cabinet ventilation in stainless — the same DC-motor platform, tucked beneath the upper run.

KEY FEATURES

- DC motor
- Under-cabinet mount — no chimney
- Dishwasher-safe baffle filters
- Stainless only at both widths

30" UNDER CABINET RANGE HOOD

DIMENSIONS & OUTLET CONFIGURATION

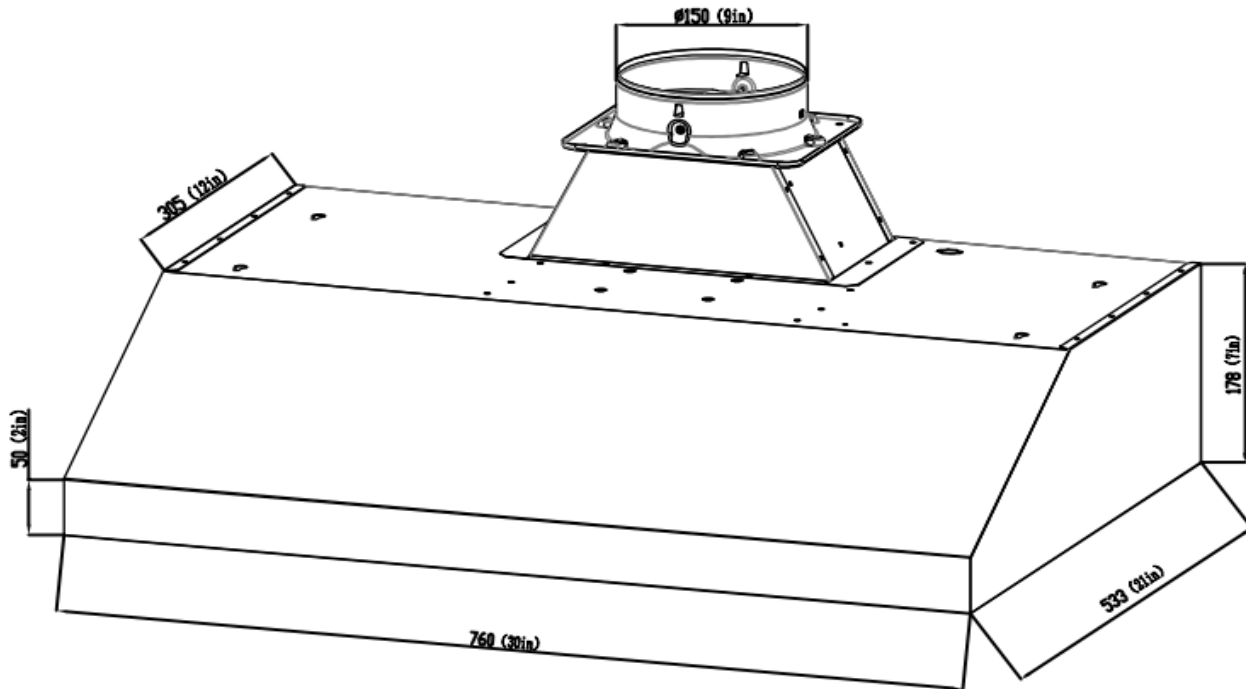


DIMENSIONS IN INCHES · DO NOT SCALE · VERIFY ON SITE BEFORE CUTTING

Overall W × D × H	30 × 21 × 7"
Canopy height	7"
Top outlet	Ø 6" round
Mounting plate	12"
Rear outlet	9.8 × 3.1"
Mounting hole centers	25.8"
Minimum height above range	26"
Product weight	35 lb
Package W × D × H	34 × 24 × 14"

OUTLET — TOP OR REAR, NOT BOTH

Remove the square cover plate and air guide plate from the base panel, fit the square air outlet and pipe, then close the unused opening with the flange plate. Top outlet offsets 7.1 in and 3.9 in, 1.1 in from the rear.

Mounting. Canopy have be mounted to cabinet or wall per included instructions. Minimum 26 in above the range.

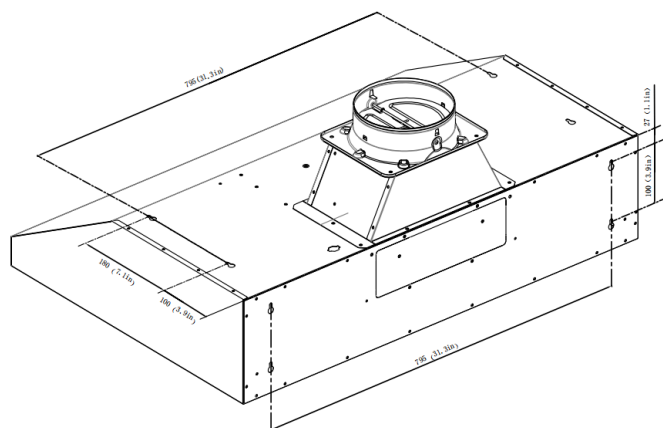

OVERVIEW

KEY FEATURES

- DC motor
- Under-cabinet mount — no chimney
- Dishwasher-safe baffle filters
- Stainless only at both widths




SKU	RH-PRO-36-SS
Mount	Under cabinet
Overall W × D × H	35.4 × 21 × 7 in
Maximum airflow	400 CFM
Sound level	38 dB at 130 CFM
Top outlet	Ø 6 in round
Rear outlet	9.8 × 3.1 in rectangular
Blower motor	Brushless DC
Rated power	270 W · 120 V, 60 Hz
Product weight	40 lb
Packaged weight	50 lb
Package W × D × H	40 × 24 × 14 in
Power	120 V · NEMA 5-15P
Lighting	2 × 3 W LED
Controls	Two knobs · fan 1–10, light 1–9
Certification	ETL

Installation — Minimum 26 in above the range.

36" UNDER CABINET RANGE HOOD

DIMENSIONS & OUTLET CONFIGURATION

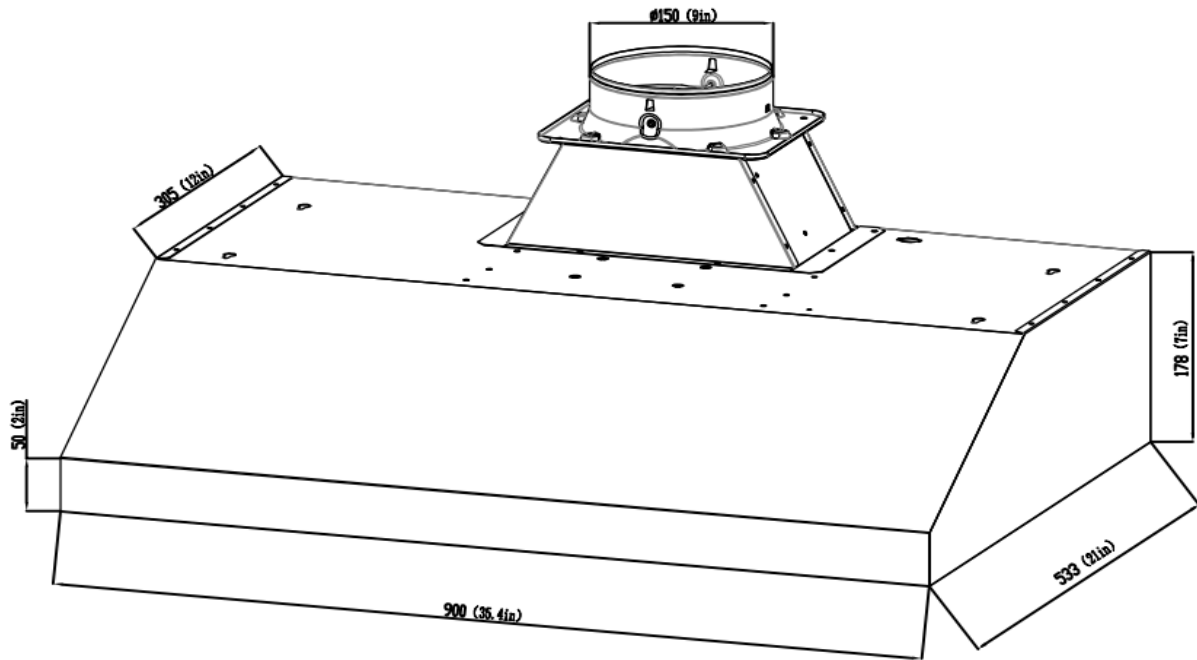

DIMENSIONS IN INCHES · DO NOT SCALE · VERIFY ON SITE BEFORE CUTTING

Overall W × D × H	35.4 × 21 × 7"
Canopy height	7"
Top outlet	Ø 6" round
Mounting plate	12"
Rear outlet	9.8 × 3.1"
Mounting hole centers	31.3"
Minimum height above range	26"
Product weight	40 lb
Package W × D × H	40 × 24 × 14"

OUTLET — TOP OR REAR, NOT BOTH

Remove the square cover plate and air guide plate from the base panel, fit the square air outlet and pipe, then close the unused opening with the flange plate. Top outlet offsets 7.1 in and 3.9 in, 1.1 in from the rear.

Mounting. Canopy have be mounted to cabinet or wall per included instructions. Minimum 26 in above the range.